

**DIGITAL NAVIGATION**

[Ordering Tree](#) [nLight Platform](#) [Controls](#) [Photometrics](#) [Performance Data](#)

**FEATURES & SPECIFICATIONS**

**INTENDED USE** — The BLTX Surface Mount LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLTX the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities.

**CONSTRUCTION** — BLTX enclosure components are die-formed for dimensional consistency and painted after fabrication with a polyester powder paint for improved performance and protection.

The reflector is finished with a high reflective matte white powder paint for improved aesthetics and increased light diffusion.

Diffusers are extruded from impact modified acrylic for increased durability.

LED boards and driver are accessible from below.

**OPTICS** — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces – rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available - curved and square designs with linear prisms or a smooth frosted finish.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000).

**Configurable BLTX:** Available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. The High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information on page 2.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Connection to nLight is simple. It can be accomplished with integrated nLight AIR wireless or through standard Cat-5 cabling. nLight offers unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission, while nLight AIR is commissioned easily through an intuitive mobile app.

Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

**SENSOR — Integrated sensor (individual control):** Sensor Switch MSD7ADCX (Passive infrared (PIR)) or MSDPDT7ADCX (PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 4 for more details on the integrated sensor.

**Integrated Sensor (nLight Wired Networking):** This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 4 for the nLight sensor options.

**Integrated Smart Sensor (nLight AIR Wireless Platform):** The rES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an automatic dimming photocell, and either a digital PIR or a microphonics (PDT) dual technology occupancy sensor. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY+, which allows for simple sensor adjustment. See page 4 for more details on the Integrated Smart Sensor.

**INSTALLATION** — The BLTX is designed to be surface mounted on a level ceiling. The BLTX can be aircraft cable suspended. See Mounting Data section on page 3.

Suitable for damp location.

**LISTINGS** — UL Listed to meet U.S. and Canadian standards.

**BUY AMERICAN ACT** — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.

Catalog Number
Notes
Type

**BLT Series LED**

**2BLTX4**

**Surface Mount**

2' x 4'  
LED



*Specifications*

Length: 48 3/4 (123.8)  
Width: 24 3/4 (62.9)  
Depth: 3 1/2 (8.9)



All dimensions are inches (centimeters) unless otherwise specified.

**Embed nLight controls today. Prepare for tomorrow.**

Now	Tomorrow
User-friendly install	Scalability
Enhanced energy savings	Space configuration
Code compliance	Future-ready


**A+ Capable Luminaire**

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background**\*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background**\*

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details.



A+ Capable options indicated by this color background.

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** 2BLTX4 40L ADP EZ1 LP840

2BLTX4		Lumens <sup>1</sup>		Diffuser		Voltage		Driver		Color temperature	
2BLTX4	2x4 BLTX Surface Mount	<b>Standard efficiency (&gt;100 LPW)</b>	<b>High efficiency<sup>2,3</sup> (&gt;130 LPW)</b>	ADP	Curved, linear prisms	(blank)	MVOLT	EZ1	eldoLED dims to 1% (0-10 volt dimming)	LP830	82CRI, 3000 K
		30L 3000	40LHE 4000	ADSM	Curved, smooth	120	120V	GZ1	Dims to 1% (0-10V dimming) <sup>5</sup>	LP835	82CRI, 3500 K
		40L 4000	48LHE 4800	SDP	Square, linear prisms	277	277V	GZ10	Dims to 10% (0-10V dimming) <sup>5</sup>	LP840	82CRI, 4000 K
		48L 4800	60LHE 6000	SDSM	Square, smooth	347	347V <sup>4</sup>	SLD	Step-level dimming <sup>6</sup>	LP850	82CRI, 5000 K
		60L 6000	72LHE 7200	<b>Diffusers w/ trim rings</b>						LP930	90CRI, 3000K
		72L 7200	85LHE 8500	ADPT	Curved, linear prisms					LP935	90CRI, 3500K
				ADSMT	Curved, smooth					LP940	90CRI, 4000K
				SDPT	Square, linear prisms					LP950	90CRI, 5000K
				SDSMT	Square, smooth						


nLight Interface	Control <sup>9</sup>	Options
<b>nLight Wired</b>	<b>nLight Wired</b>	<b>Individual Control</b>
(blank) no nLight <sup>®</sup> interface	(blank) no nLight <sup>®</sup> control	MSD7ADCX PIR integral occupancy sensor with automatic dimming control photocell <sup>11</sup>
N80 nLight with 80% lumen management	NES7 nLight™ nES 7 PIR integral occupancy sensor <sup>10,11</sup>	MSDPDT7ADCX PDT integral occupancy sensor with automatic dimming control photocell <sup>11</sup>
N80EMG nLight with 80% lumen management For use with generator supply EM power <sup>7</sup>	NESPD7 nLight™ nES PDT 7 dual technology integral occupancy control <sup>10,11</sup>	
N100 nLight without lumen management	NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell <sup>10,11</sup>	
N100EMG nLight without lumen management For use with generator supply EM power <sup>7</sup>	NESPD7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell <sup>10,11</sup>	
<b>nLight Wireless</b>	<b>nLight Wireless</b>	
(blank) no nLight AIR interface	(blank) No nLight <sup>®</sup> control	
NLTAIR2 nLight AIR Generation 2 enabled <sup>8</sup>	RES7 nLight AIR control with PIR integral occupancy sensor and automatic dimming photocell <sup>15</sup>	
	RES7PDT nLight AIR control with PDT dual technology integral occupancy sensor and automatic dimming photocell <sup>15</sup>	
	RIO nLight AIR radio module without sensor <sup>15</sup>	
	RES7EM nLight AIR PIR integral occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection <sup>16</sup>	
	RES7PDTEM nLight AIR microphonics dual technology occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection <sup>16</sup>	
	RIOEM nLight AIR radio module less sensor, with UL924 Emergency Operation, via power interrupt detection <sup>16</sup>	
		BDP Disconnect Plug
		EL7L 700 lumen battery pack <sup>12</sup>
		EL14L 1400 lumen battery pack <sup>12</sup>
		E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS <sup>12</sup>
		BGTD Bodine Generator Transfer Device <sup>13</sup>
		GLR Fast-blowing fuse <sup>14</sup>
		GMF Slow-blowing fuse <sup>14</sup>
		DWAM Anti-microbial paint
		BAA Buy America(n) Act Compliant

Accessories next page

### Notes

- 1 Approximate lumen output.
- 2 All versions may not achieve 130+ LPW. Refer to photometry on [www.acuitybrands.com](http://www.acuitybrands.com).
- 3 90 CRI and versions with integral sensor trim rings may not achieve 130 LPW.
- 4 Not available with SLD driver, EL7L or EL14L battery packs.
- 5 GZ1 and GZ10 not available any Control or Sensor options.
- 6 Not available with N80, N80EMG, N100, N100EMG, NLTAIR2, or occupancy control.
- 7 nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture.
- 8 Must order with RES7, RESPDT7, or RIO sensor. Only available with EZ1 driver.
- 9 Must specify diffuser with trims rings. See sensor options on page 4.
- 10 Requires N80, N80EMG, N100, or N100EMG.
- 11 Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.
- 12 When using pre-wire option, use PWS1846 or PWS1846 PWSLV.
- 13 Requires BSE labeling, voltage specific. Consult factory for options.
- 14 Must specify voltage, 120 or 277 with GLR & GMF fusing and BGTD.
- 15 See UL 924 Sequence of Operation chart on page 3. When combined with the EZ1 option, can be used as a normal power sensing device for nLight AIR devices and luminaires with EM emergency options.
- 16 See UL924 Sequence of Operation chart on page 3.

## Multiple Diffuser Options



### UL924 Sequence of Operation

The below information applies to all nLight AIR devices with an EM option.

- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

## MOUNTING DATA

For unit installation. Surface mount only. BLTX is to be installed on even surfaces only.

For aircraft cable mount:

one STACG\_, STACGF\_, or STACGE\_ required for each 1/4" suspension point. Suspension Kit Ceiling Types:



F1 for use with most T-bar and screw slot grid ceiling applications.

Designed for on-grid and off-grid installations.

F2 for use with recessed or surface-mount horizontal J-box applications.

Stem-mount: Four stems are recommended per fixture, 1/4" holes require enlarging to 7/8" Diameter. SQ or 1B stem.

See Accessories below:

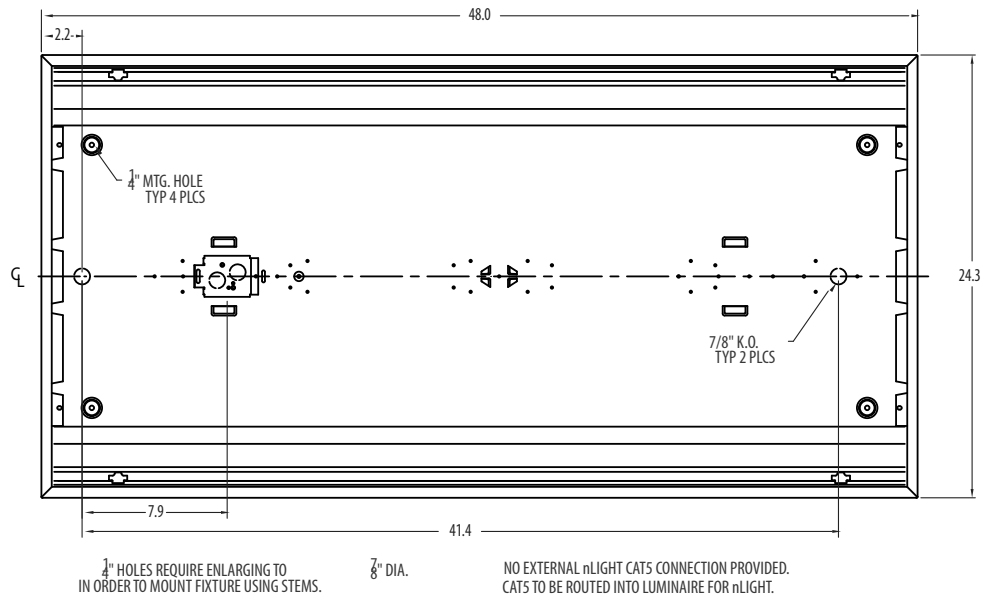

## Accessories & Replacement Parts

### Replacement Parts: Order as separate catalog number.

2DBLTX48 ADP LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 SDP LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 ADSM LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 SDSM LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 ADPT LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 SDPT LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 ADSMT LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 SDSMT LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 ADPT SENSOR LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 SDPT SENSOR LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 ADSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens with trim rings
2DBLTX48 SDSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens with trim rings
RK8BDP 2P U	Disconnect Plug (BDP), 2 Pole, Package of 1
RK8BDP 3P U	Disconnect Plug (BDP), 3 Pole, Package of 1
RK8BDP 2P J10	Disconnect Plug (BDP), 2 Pole, Package of 10
RK8BDP 2P J40	Disconnect Plug (BDP), 2 Pole, Package of 40

## nLight Platform

nLight embedded fixtures offer:	Customers get:
Manual Dimming	Convenience and visual comfort for occupants
Motion Sensing and/or Daylight Harvesting	Energy savings and code compliance
Fixture or Group Level Control	Ability to configure lighting to the space requirements
Flexibility	Ease of fixture moves, adds and changes
Wireless Wall Switch (nLight AIR Only)	Ease and flexibility of placement
Astronomical and Time of Day Scheduling	Energy savings and building security
Scalable Solution	nLight controls to grow with your business
Future-Ready	nLight platform to set foundation for future upgrades and capabilities

## nLight Air Wireless



### Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY+ app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



## nLight Wired Networking




### Simple as 1,2,3

1. Install the nLight® Wired fixtures with embedded control
2. Install the nLight Wired wall switch
3. Connect the fixtures using standard CAT5e cables and the devices will automatically discover each other and work (plug and play)

Sensor Options					
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking	nLight AIR Networking
		PIR	PDT		
MSD7ADCX	X	X			
MSDPDT7ADCX	X		X		
NES7		X		X	
NES7ADCX	X	X		X	
NESPDT7			X	X	
NESPDT7ADCX	X		X	X	
RES7	X	X			X
RESPDT7	X	X	X		X

## Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

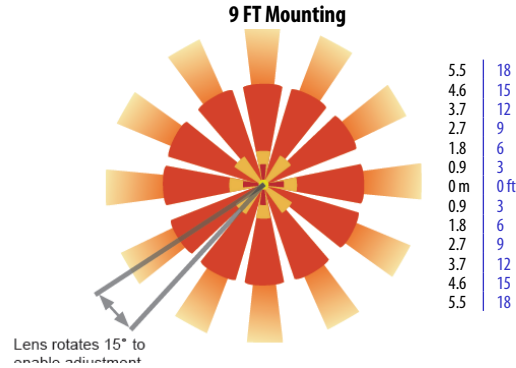

### Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.

The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

### nLight AIR Wireless


nLight AIR is the ideal solution for retrofit or new construction spaces where adding additional wiring can be labor intensive and nLight AIR is available with or without an integral sensor. The integrated rES7 or rES7PDT smart sensors are part of each luminaire in the nLight AIR network, which can be grouped to control multiple luminaires. The granularity of control with the digital PIR occupancy detection and daylight sensing makes a great solution for any application.

### nLight Wired Networking

The nES7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the nES7ADCX includes an integrated photocell, which enables daylight harvesting controls.


For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the nESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

### Sequence of Operation (MSD7 Sensor)

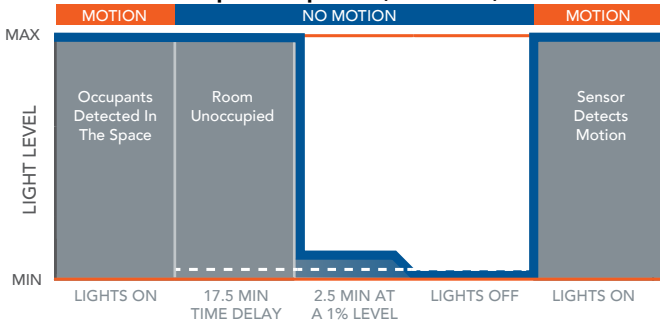

\*The presetting on the automatic dimming photocell is 5fc.

### Sequence of Operation (nES7 and rES7 and Sensor)

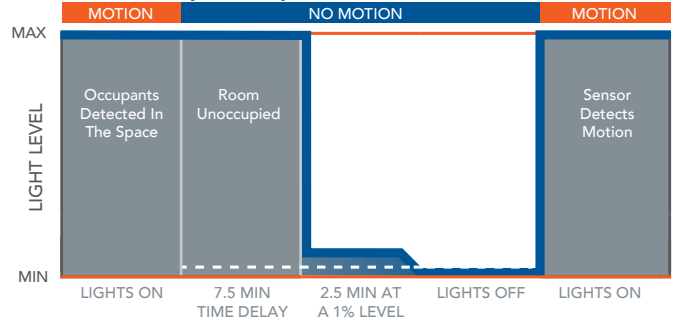

\*The presetting on the automatic dimming photocell is 5fc (NES7) and 10fc (RES7).

## Controls Accessories

### nLight® Wired Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlight](http://www.acuitybrands.com/products/controls/nlight).



WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODMA [Color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODMA DX [Color]	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
Graphic touchscreen	nPOD TOUCH [Color]	Wall switch with raise/lower	nWSX PDT LV DX [color]
Photocell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CATS 10FT J1
		30' cable	CATS 30FT J1

### nLight® AIR Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlightair](http://www.acuitybrands.com/products/controls/nlightair).

Wall switches	Model number
On/Off single pole	rPODBA [color] G2
On/Off two pole	rPODB A2P [color] G2
On/Off & raise/lower single pole	rPODBA DX [color] G2
On/Off & raise/lower two pole	rPODBA 2P DX [color] G2

BLT fixtures with integrated rIO devices complement any small office space. Pair them with an rCMS occupancy sensor and the space now has wireless occupancy sensing and dimming capability. For additional configuration options please consult with Tech Support.

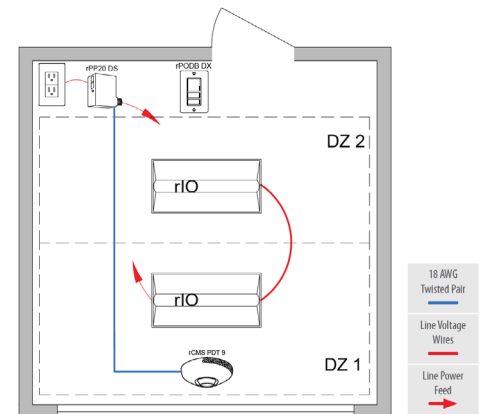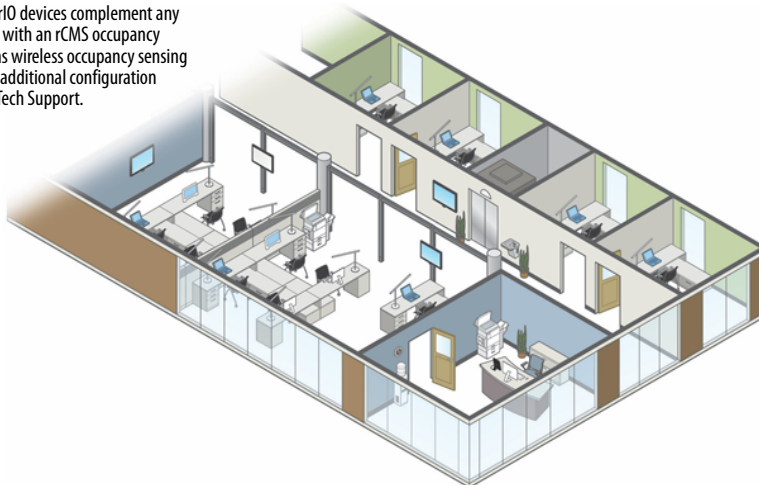

## rCMS<sup>1</sup> Example: RCMS PDT 10 AR G2

Series / Detection	Power Supply <sup>1</sup>	Occupancy Detection	Lens (Required)	Operating Mode	Generation
RCMS nLight AIR occupancy and daylight sensor	[blank] Power Supply ordered separately PS 150 Standard 150 mA Power Supply	[blank] PIR Detection PDT Dual Tech PIR/ Microphonics	10 Large Motion/ Extended Range 360° 9 Small Motion/ Extended Range 360° 6 High Bay 360° Lens	[BLANK] None AR Auxiliary Relay	G2 Generation 2 compatibility

### Notes

1 RCMS requires low voltage power from either RPP20 DS 24V G2 or PS150.



Sensor Switch  
WSXA D



nLight WIRED  
NPOD UNITOUCH



nLight WIRED  
nPODMA DX



nLight AIR  
rPODBA



BLT with rIO




rPODBA



RCMS


## Constant Lumen Management

Enabled by the embedded nLight control, the BLTX actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

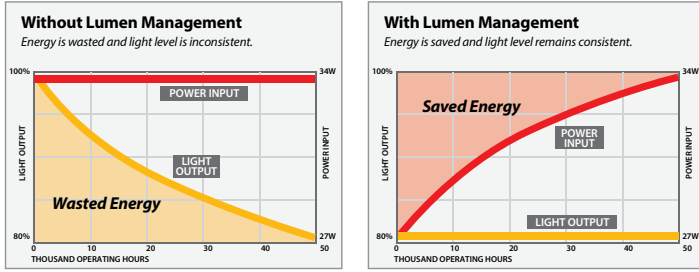


## PHOTOMETRICS

**2BLTX4 40L ADP LP835**, 3945 delivered lumens, test no. LTL28918P717, tested in accordance to IESNA LM-79

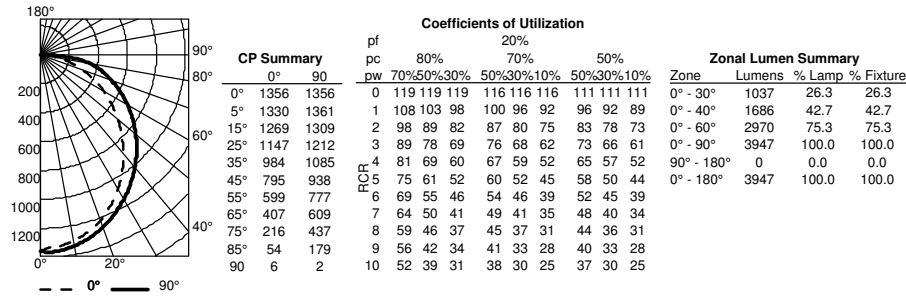

**2BLTX4 48L ADP LP835**, 5121 delivered lumens, test no. LTL28918P721, tested in accordance to IESNA LM-79

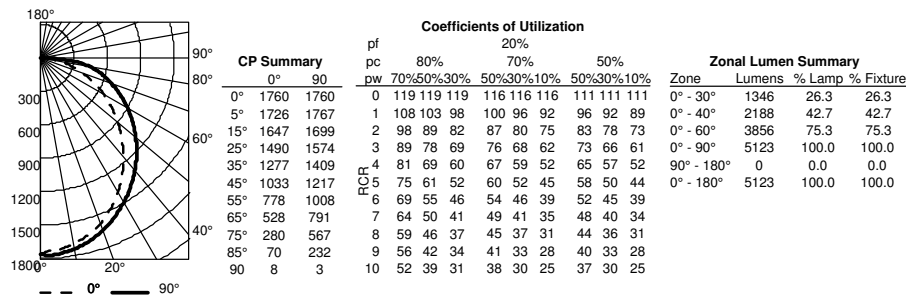

Performance Data			
Lumen Package	Lumens	Input Watts	LPW
30L ADP LP830	3286	30	110
30L ADP LP835	3371	30	113
30L ADP LP840	3445	30	115
30L ADP LP850	3614	30	121
40L ADP LP830	3846	34	113
40L ADP LP835	3945	34	116
40L ADP LP840	4032	34	118
40L ADP LP850	4230	34	124
48L ADP LP830	4993	45	111
48L ADP LP835	5121	45	114
48L ADP LP840	5234	45	116
48L ADP LP850	5492	45	122
60L ADP LP830	6014	53	114
60L ADP LP835	6169	53	117
60L ADP LP840	6305	53	119
60L ADP LP850	6615	53	125
72L ADP LP830	7388	67	110
72L ADP LP835	7579	67	113
72L ADP LP840	7746	67	115
72L ADP LP850	8127	67	121

**How to Estimate Delivered Lumens in Emergency Mode**  
 Use the formula below to estimate the delivered lumens in emergency mode  
**Delivered Lumens = 1.25 x P x LPW**  
 P = Output power of emergency driver. P = 10W for E10WLCP option.  
 LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet. LPW = Lumen per watt rating of the luminaire. LPW information available in Performance Data section.

HE Performance Data			
Lumen Package	Lumens	Input Watts	LPW
40LHE ADP LP830	4062	32	127
40LHE ADP LP835	4167	32	130
40LHE ADP LP840	4259	32	133
40LHE ADP LP850	4469	32	140
48LHE ADP LP830	4655	36	127
48LHE ADP LP835	4775	36	130
48LHE ADP LP840	4880	36	133
48LHE ADP LP850	5121	36	139
60LHE ADP LP830	5473	42	129
60LHE ADP LP835	5614	42	132
60LHE ADP LP840	5738	42	135
60LHE ADP LP850	6020	42	142
72LHE ADP LP830	6805	52	130
72LHE ADP LP835	6981	52	133
72LHE ADP LP840	7135	52	136
72LHE ADP LP850	7486	52	143
85LHE ADP LP830	8189	64	127
85LHE ADP LP835	8400	64	131
85LHE ADP LP840	8585	64	134
85LHE ADP LP850	9008	64	140