



## 100W 0-10V 'Dim to Dark' LED Driver

### SOLOdrive

SOLOdrive offers industry-best Natural Dimming to dark - LED dimming made beautiful! With any dimmer, in any application. Symbiosis on SOLOdrive stands for unity, for the SOLOdrive working seamlessly together with LED modules, controls and intelligent luminaire elements.

### Product offering



### SOLOdrive 1061/S

|                     |   |
|---------------------|---|
| Part number (P/N)   | SL1061S1  |
| Product description | SOLOdrive AC, 100W, 0-10V, 1 control channel, constant current, 4x 57V outputs, side feed, square metal |

### Features & benefits

|                      |   |
|----------------------|---|
| Natural dimming      | Dim to dark, smooth brightness changes, excellent flicker performance, adaptable dimming curves, configurable minimum dimming level                 |
| Symbiosis            | Seamless interoperability with LED modules, controls and in-luminaire intelligent devices   |
| LEDcode              | Configurable design to work with most constant current LED modules and arrays, while providing a connection point to integrated peripheral controls |
| Programmable         | Fine-tune your driver for any application   |
| Performance          | Universal input voltage range, low inrush current and total harmonic distortion (THD), high power factor and efficiency                             |
| Camera compatibility | Hybrid HydraDrive technology is proven to work in TV studios and security camera environments   |


### Programming tools

|                       |   |
|-----------------------|---|
| Programming interface | <a href="#">TOOLbox pro (TLU20504)</a>  |
| Programming cable set | <a href="#">TOOLbox pro to LED driver, programming cable, 5pcs (TLC03051)</a> |
| Programming software  | <a href="#">FluxTool</a>  |

### Warranty

|                 |  |
|-----------------|--|
| Warranty period | <a href="#">General Terms and Conditions</a> |
|-----------------|--|

### Order number configurator

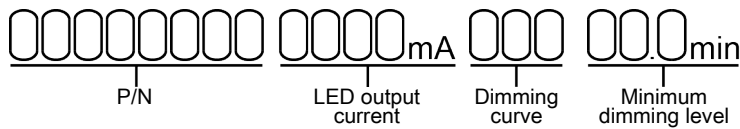

|                       |   |
|-----------------------|---|
| P/N                   | LED driver part number.   |
| LED output current    | Enter value in 1mA increments, e.g. "811" for 811mA   |
| Dimming curve         | "LOG" for logarithmic (default)<br>"LIN" for linear   |
| Minimum dimming level | Leave blank for default minimum dimming level of 0.1%. Specify in 0.1% increments, e.g. "10.5" for 10.5%. |


### Input characteristics

|                                |  |
|--------------------------------|--|
| Nominal input voltage range AC | 120 - 250V (ENEC), 120 - 277V (UL)                 |
| Nominal input voltage range DC | 120 - 275V   |
| Maximum input current          | 1.05A @ 120V / 60Hz                                |
| Input frequency range          | 50 - 60Hz  |
| Efficiency at full load        | 90%  |
| Power factor at full load      | >0.94  |
| THD at full load               | <10%   |
| Maximum inrush current         | 35A 240µs @ 120V / 60Hz                            |
| Surge protection               | 3kV differential mode (DM)<br>4kV common mode (CM) |
| Maximum standby power          | <0.5W  |

### Output characteristics

|                                       |   |
|---------------------------------------|---|
| Maximum LED output power              | 100W  |
| Number of LED outputs                 | 4 (UL Class 2)  |
| Programmable LED output current range | 200 - 1050mA  |
| LED output type                       | Programmable in 1mA increments within specified current range |
| LED output current tolerance          | +/- 5% at programmed LED output current                       |
| LED output voltage range              | 2 - 57V   |


Operating window

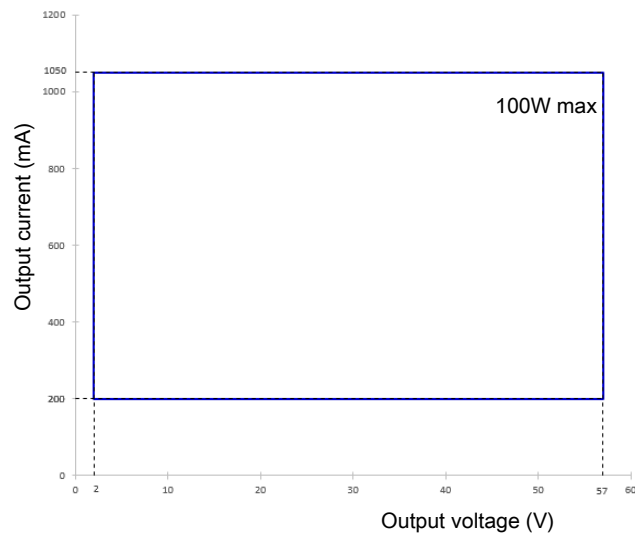


**Control characteristics**

|                       |                                 |
|-----------------------|---------------------------------|
| Control channels      | 1                               |
| Control protocol      | 0-10V                           |
|                       | LEDcode                         |
| Dimming range         | 100% - 0.1%                     |
| Dimming curve options | Logarithmic (default)<br>Linear |
| Dimming method        | Hybrid HydraDrive               |
| 0-10V current draw    | <2mA                            |

0-10V dimming chart

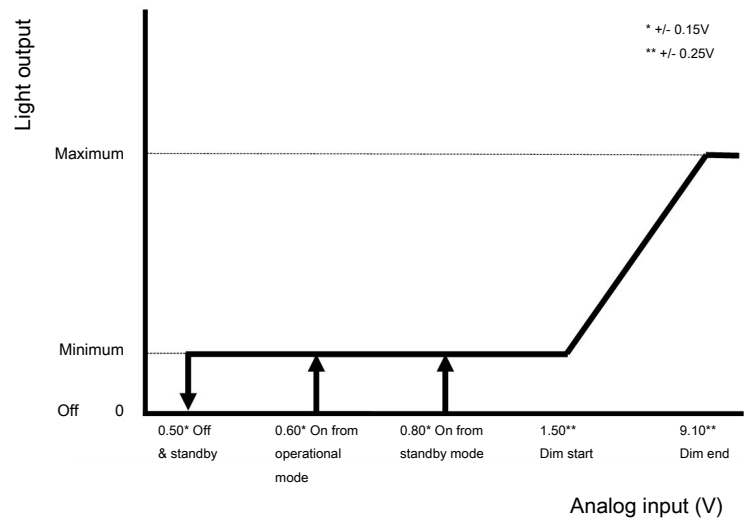

Dimming curves

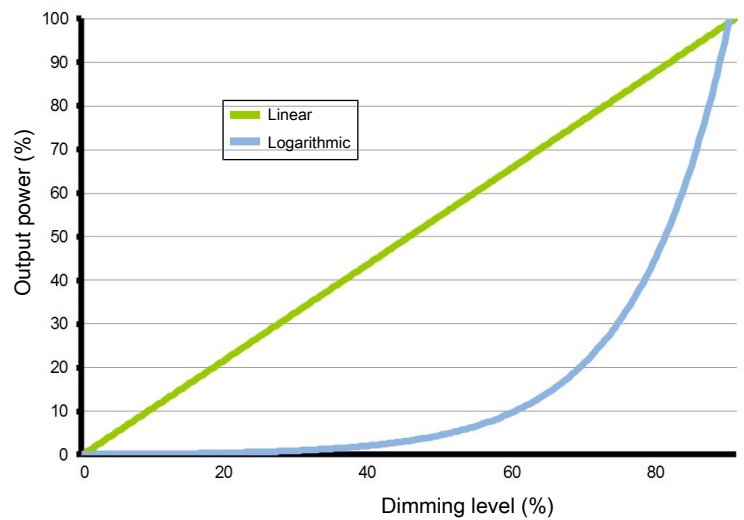

## Environmental conditions

|   |   |
|---|---|
| Operating ambient temperature (Ta) range    | -40 °C to +50 °C  |
| Maximum operating case temperature (Tc max) | 83 °C   |
| Lifetime                                    | 50000 hours at a maximum case temperature (Tc) of 83 °C |


## LED driver protection

|                          |   |
|--------------------------|---|
| Thermal                  | The LED output current is decreased whenever the internal LED driver temperature exceeds factory preset temperature. The LED output current is increased again once the internal LED driver temperature drops below this internal temperature threshold. If the internal LED driver temperature continues to increase, despite a decrease in output current, the LED driver will shut down. |
| LED output short circuit | The LED output current is cut off whenever the LED driver detects a short-circuit. The LED driver will attempt a restart every 400ms after a short-circuit is detected.   |
| LED output overload      | The LED driver decreases the LED output current sequentially, until it reaches its maximum rated power, whenever a load that exceeds the LED driver's maximum rated power is connected to the LED output.   |
| Reverse polarity         | The LED driver will not yield any current if the polarity of the load on the LED output is reversed. This situation will not damage the LED driver but may damage the LED load.   |

## LED protection

|                        |   |
|------------------------|---|
| Thermal protection LED | An external NTC thermistor, which is placed on a PCB near the LEDs, can be connected to the driver via the LEDcode/NTC terminals. The output current to the LEDs is then decreased by 75% whenever the NTC exceeds a maximum allowable temperature, which is specified by the user in the FluxTool software. The default NTC temperature limit is set to 70 °C. |
| Thermistor value       | 47kΩ  |
| Suitable thermistors   | leaded: Vishay, P/N 238164063473<br>screw: Vishay, P/N NTCASCWE3473J  |

**LED driver mechanical details**

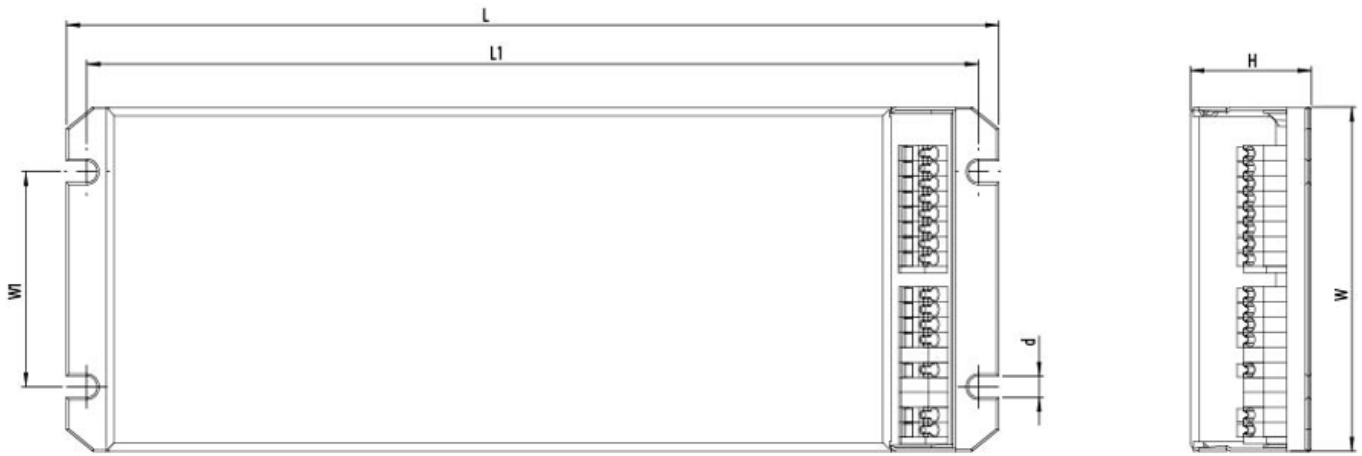

Length (L) typical: 230 mm / 9.06 in

Width (W) typical: 80 mm / 3.15 in


Height (H) typical: 30 mm / 1.18 in

3D files available on product web page IGS

Weight 912.5 g

Mounting torque Not to exceed 0.5Nm

## Connector layout

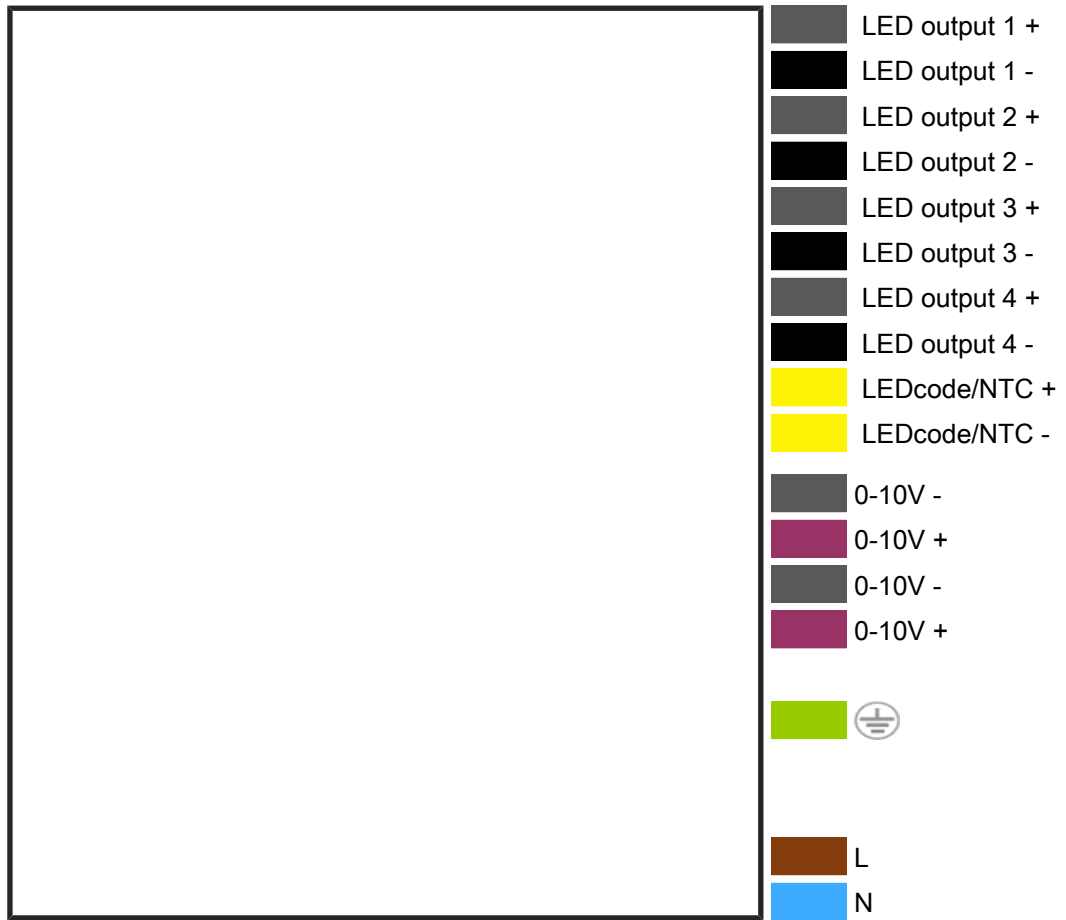

## Input wiring specifications

|                               |                                       |
|-------------------------------|---------------------------------------|
| Connector type                | push-in terminals                     |
| Connector supplier and series | Wago 250 series                       |
| Wire type                     | solid or stranded copper              |
| Wire core cross section       | 0.5 - 1.5 mm <sup>2</sup> AWG 20 – 16 |
| Wire strip length             | 9.0 mm                                |

**Output wiring specifications**

|  |  |
|--|--|
| Connector type                               | push-in terminals  |
| Connector supplier and series                | Wago 250 series  |
| Wire type                                    | solid or stranded copper   |
| Wire core cross section                      | 0.5 - 1.5 mm <sup>2</sup> AWG 20 – 16  |
| Wire strip length                            | 9.0 mm   |
| Maximum remote mounting distance of LED load | AWG 20 (0.52 mm <sup>2</sup> ) - 14 m / 46 ft<br>AWG 19 (0.65 mm <sup>2</sup> ) - 18 m / 59 ft<br>AWG 18 (0.82 mm <sup>2</sup> ) - 22 m / 72 ft<br>AWG 17 (1.04 mm <sup>2</sup> ) - 28 m / 92 ft<br>AWG 16 (1.31 mm <sup>2</sup> ) - 36 m / 118 ft |

**Automatic circuit breakers (MCB)**

| Maximum loading | MCB type              | B10 | B13 | B16 | C10 | C13 | C16 |
|-----------------|-----------------------|-----|-----|-----|-----|-----|-----|
|                 | Number of LED drivers | 5   | 6   | 8   | 8   | 10  | 13  |

## Standards and compliance

|                                     |   |
|-------------------------------------|---|
| UL, recognized component            | UL 1310<br>UL 8750<br>(Class 2 output)  |
| ENEC safety                         | EN 61347-1<br>EN 61347-2-13 (Emergency lighting)  |
| ENEC performance                    | EN 62384  |
| Conducted emissions                 | EN 55015  |
| Radiated emissions                  | EN 55015  |
| Radio disturbance characteristics   | EN 55022  |
| Harmonic current emissions          | EN 61000-3-2  |
| Electromagnetic immunity            | EN 61547  |
| 0-10V                               | IEC/EN 60929 annex E<br>NOTE: From 0.6V to 10V eldoLED LED drivers comply with IEC/EN 60929 annex E. Below 0.6V eldoLED LED drivers comply with ABL 0-10V Design Spec v1.2 enabling standby mode. For detailed dimming characteristics see 0-10V response chart in Control Characteristics. |
| FCC                                 | 47 CFR Part 15 class B  |
| RCM                                 | AS/NZS 61347.1, AS/NZS 61347.2.13   |
| Restriction of hazardous substances | RoHS3 (Directives 2011/65/EU-2015/863/EU)   |

## Certifications



---

## Safety

---



FELV control terminals marked “Risk of electric shock” are not safe to touch. Dimming connected to FELV control terminal shall be insulated for Low Voltage supply of the control gear.

---



Risk of electrical shock. May result in serious injury or death. Disconnect power before servicing or installing.

---



The LED driver may only be connected and installed by a qualified electrician. All applicable regulations, legislation, and building codes must be observed. Incorrect installation of the LED driver can cause irreparable damage to the LED driver and the connected LEDs.

Pay attention when connecting the LEDs: polarity reversal results in no light output and often damages the LEDs.

---



LED drivers are designed and intended to operate LED loads only. Powering non-LED loads may push the LED driver outside its specified design limits and is, therefore, not covered by any warranty.

---



eldoLED products are designed to meet the performance specifications as outlined at certain operating conditions in the data sheet. It is the responsibility of the fixture manufacturer to test and validate the design and operation of the system under expected and potential use cases, including faults.

---



Please observe voltage drop over long cable lengths. Longer cable lengths increase EMI susceptibility.

---



Product renderings and dimensional drawings are generic for the housing type. Product label, connector type and quantity may vary.

---

---

### Europe, Rest of World

eldoLED B.V.  
Science Park Eindhoven 5125  
5692 ED Son  
The Netherlands

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)

---

### North America

eldoLED America  
One Lithonia Way  
Conyers, GA 30012  
USA

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)

---