

## 2800mA Programmable LED Driver

- Class 2, 95W Constant Current Output with 0-10V dimming
- Full featured programmability
- Low standby power (<0.5W) in dim-to-off state



Performance	
Input Voltage	120Vac - 277 Vac
Input Current Max	0.92@120V - 0.41@277V
Input Power Max	110W
Input Frequency	50 - 60 (Hz)
Power Factor*	> 0.95 @ Max Load
THD max*	< 15% @ Max Load
Output Voltage (Refer to Power Curve Chart)	16V to 34V @ 2.80 Amps 16V to 56V @ 1.70 Amps
Max. Output Current	2800mA
Min. Dimming Current	10mA
Output Power	95W
Standby Power	< 0.5W @ 120Vac - 277Vac
Line Regulation	± 3 %
Load Regulation	± 5 %
Output Ripple @ max lout	High Freq <15% (Pk-Pk/avg) Low Freq (≤ 120Hz) <5% (Pk-avg/avg)
Inrush Current Peak @ >10% Duration	120Vac: 9.35A / 313uS 277Vac: 22.85A / 782uS

- \* Refer to charts for additional information
- Harmonic Emissions comply with ANSI C82.77
  - Inrush current complies with NEMA 410

### Ordering Information

Order Number	Description	Qty/Carton
D28CC95UNVPW-F010C	Standard Product	10

Protection:

Over Voltage, Under Voltage, Short Circuit, Over Temp

Safety:

UL 8750 & CSA 250.13  
Class P

Physical	
Length	9.50 in
Width	2.38 in
Height	1.58 in
Mounting Length	8.90 in
Weight (lbs)	2.6
Lead Lengths (+/- 1 in)	
Blk, Wht, Violet, Pink	11.5 in
Red(+), Blue(-)	11.5 in

Lead-wires are 18 AWG 105°C /600V solid copper.

Environmental	
EMI and RFI	Meets FCC part 15 (Class A) Non-Consumer Limits
Operating	-40°C to 55°C
Storage Temperature	-40°C to 85°C
Warranty tc	85°C max for warranty
Location Rating	UL Dry & Damp, Type HL
IP Rating	IP66
Transient Protection	IEEE C62.41 6kV**

\*\*Driver uses MOVs for transient protection.

Refer to application note EVD07 at [www.unvlt.com](http://www.unvlt.com) for additional information on Hi-Pot Testing.


Application and operation performance specification information subject to change without notification.

Programmable Features
Output Current
Minimum Dimming Level
Dim-to-Off
Dimming Curve (Linear, Linear Soft Start, Logarithmic)
Lumen Maintenance
Thermal Overload

\*Refer to application notes EVD10 and EVD11 at [www.unvlt.com](http://www.unvlt.com) for additional information on programmable features.

Programming System	
Software	EVERset Programming Software
Hardware	LDPC000A Configuration Tool
Driver Interface	Wireless via RFID


## Wiring Diagram

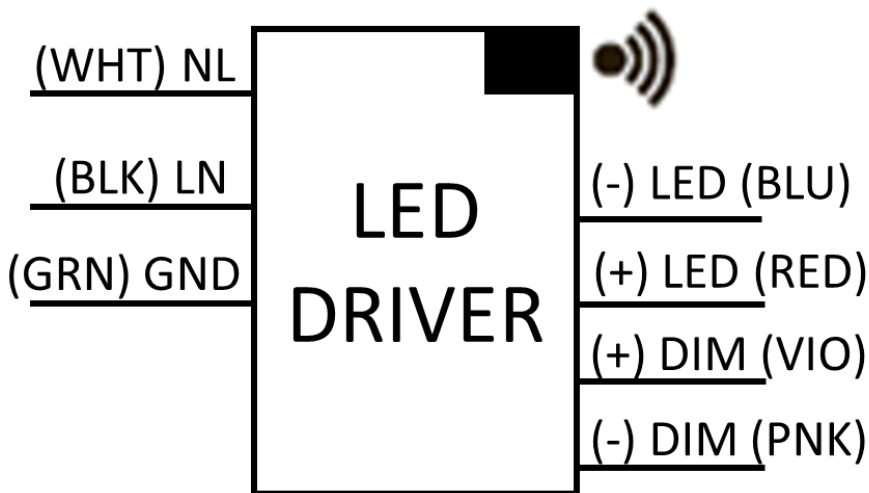

- **NOTE:** Unused Orange and Yellow/Black leads must be individually capped off when auxiliary output power is not used.

Application and operation performance specification information subject to change without notification.

## Driver Operating Range:

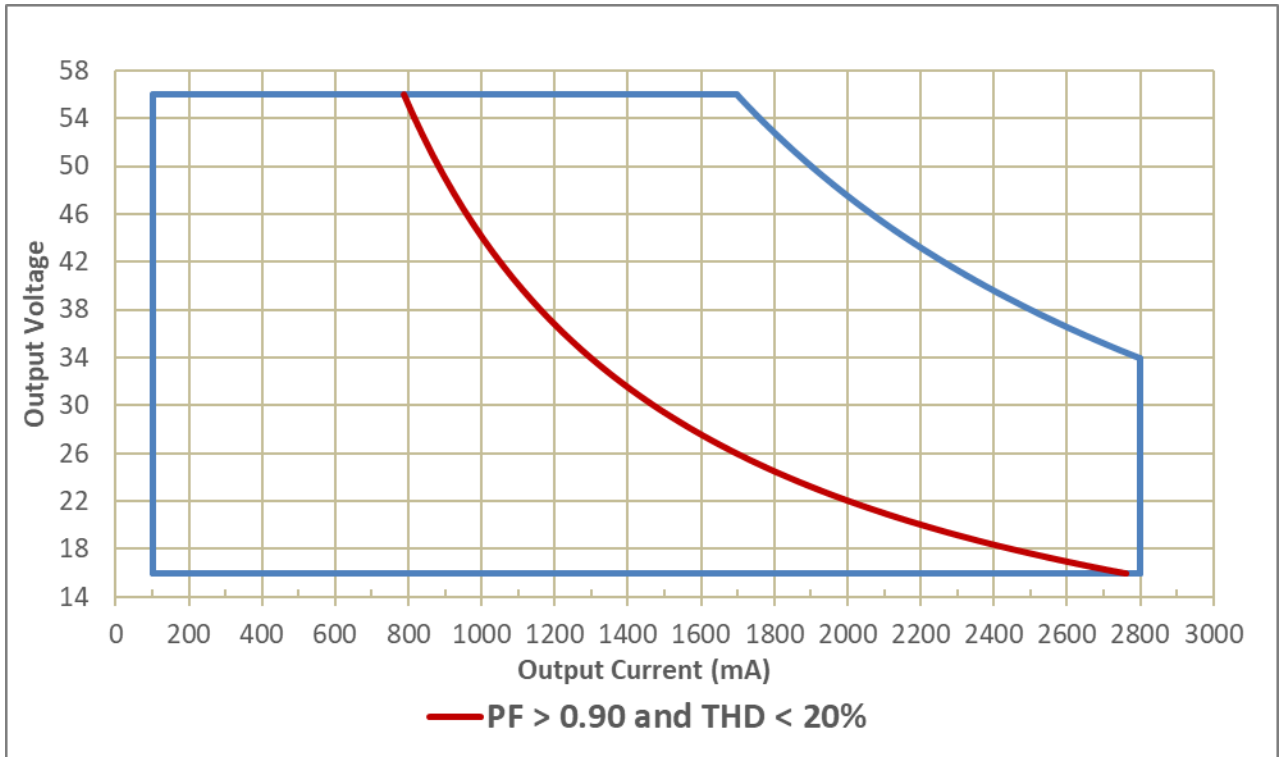


The operating area to the right of the red line will have PF > 0.90 and THD < 20%


Application and operation performance specification information subject to change without notification.

## 0-10V Dimming

Linear Dimming to 1%

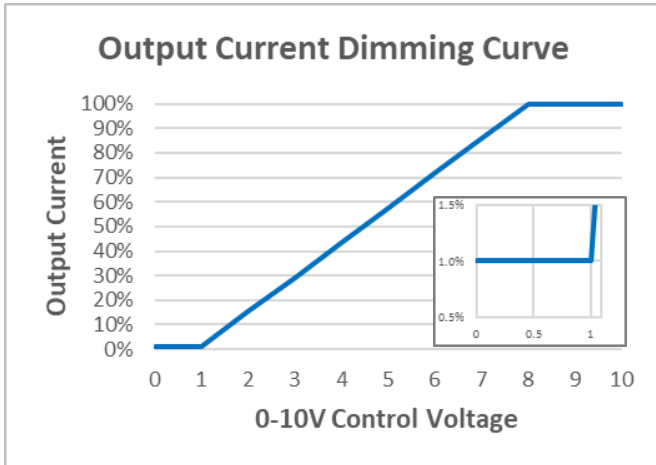

Linear Dimming to 1% w/ Dim-to-Off\*

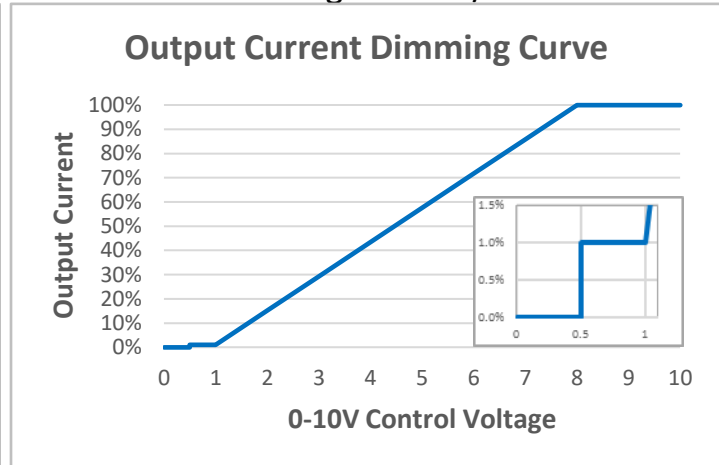

### 0-10V Analog Dimming Interface

- Analog 0 to 10 VDC Voltage Control
- Use Violet (+) & Pink (-) for connection to 0-10VDC.
- Wiring Violet & Pink together provides min. light output.
- Capping Violet & Pink separately provides 100% light output.
- 0-10V interface can be wired as Class 1 or Class 2 Circuit.
- Driver will source a maximum of 165uA for control needs.
- Controller must sink current from the 0-10V control leads.
- To get 1% minimum dimming level, maximum output current should be set to  $\geq 1000\text{mA}$ .

\* Driver ships with Dim-to-Off disabled. Dim-to-Off can be changed through the EVERset programming software.

### Programmable Dimming Features



Feature	Range	Factory Default
Maximum Output Current	100 - 2800mA	default = 2800mA
Minimum Dimming Level	10 - 1400mA	default = 28mA
Dimming Curve	(Linear, Linear Soft Start, Logarithmic w/ factor 1 to 7)	default = Linear
Dimming Control Voltage Range		
Max Bright Control Voltage	7 - 9Vdc	default = 8Vdc
Min Dim Level Control Voltage	1 - 3Vdc	default = 1Vdc
Dim-to-Off	0.1 - 1.7Vdc	default = 0.5Vdc

\* Refer to application note EVD10 at [www.unvlt.com](http://www.unvlt.com) for additional information on programmable dimming features.

Application and operation performance specification information subject to change without notification.

## Performance: Efficiency



Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

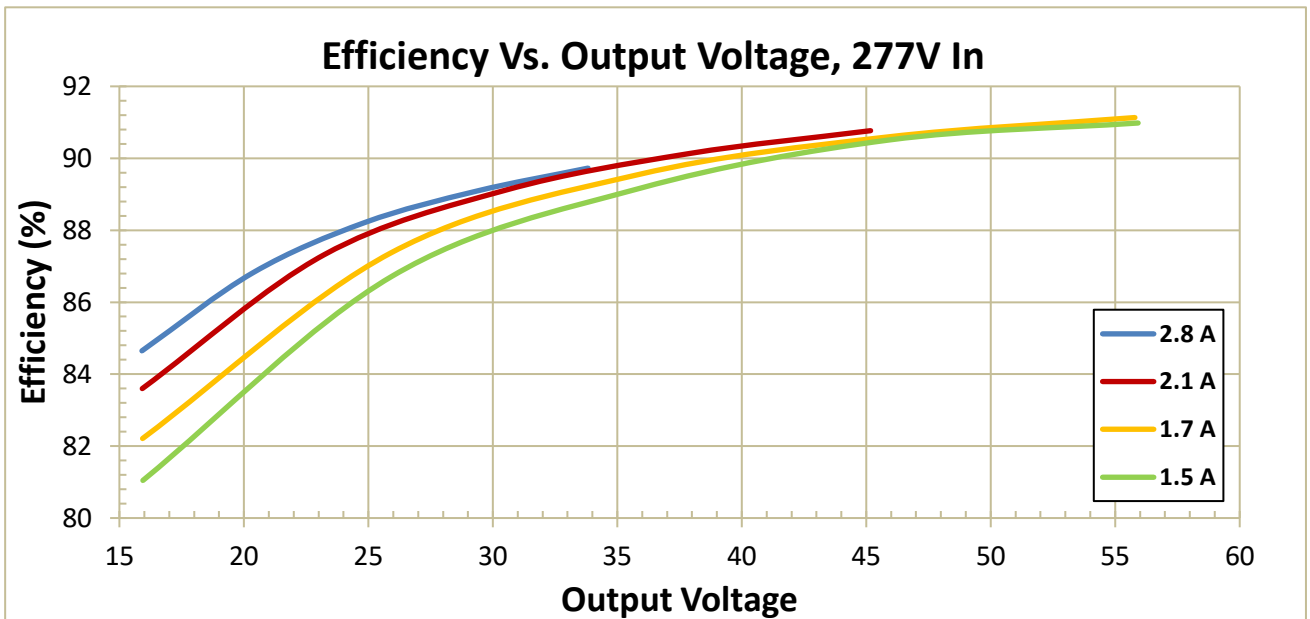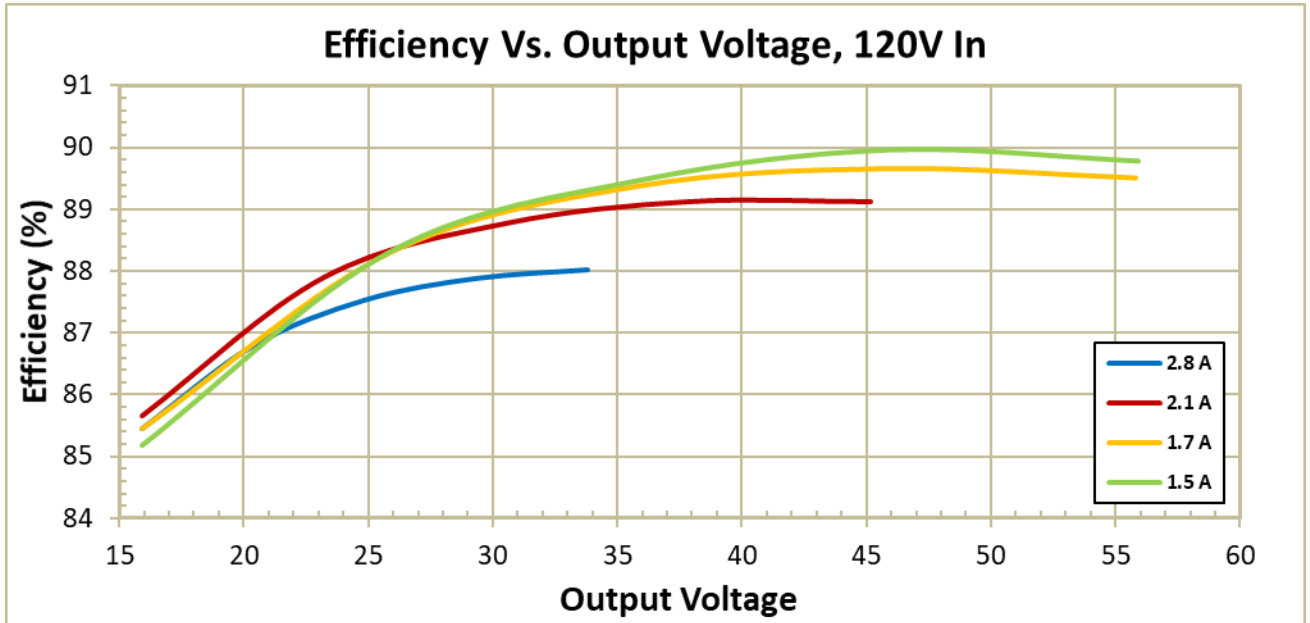

Application and operation performance specification information subject to change without notification.

## Performance: Total Harmonic Distortion, & Power Factor


Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

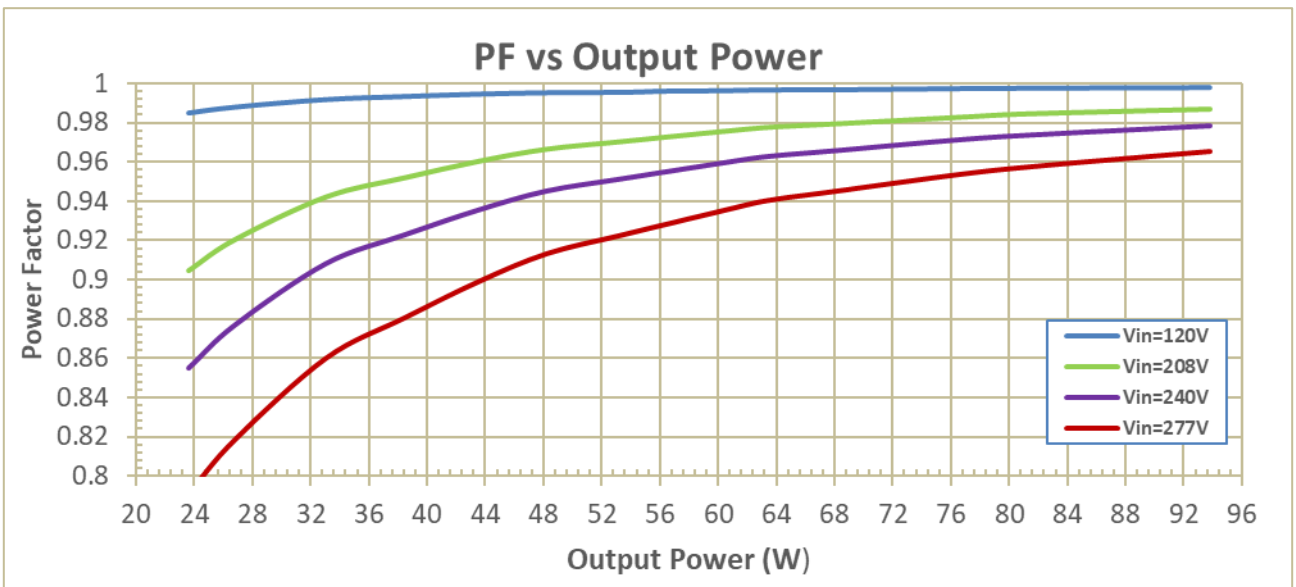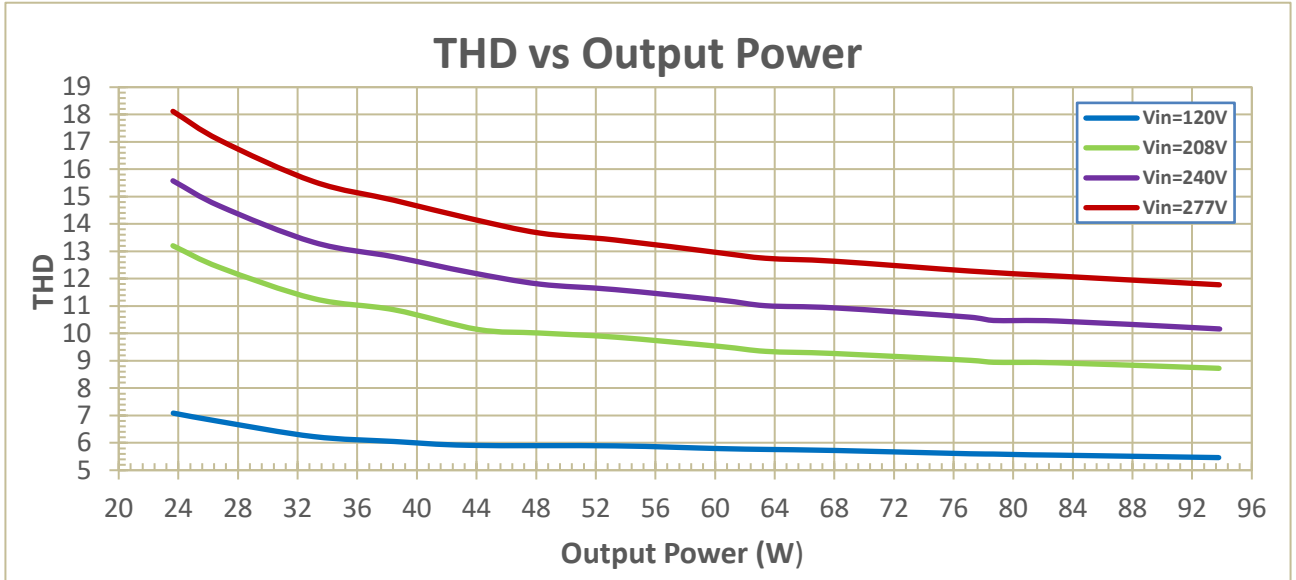

Output power based on maximum rated output current and varying load voltages.

Application and operation performance specification information subject to change without notification.

## Programmable Driver Thermal Overload Foldback

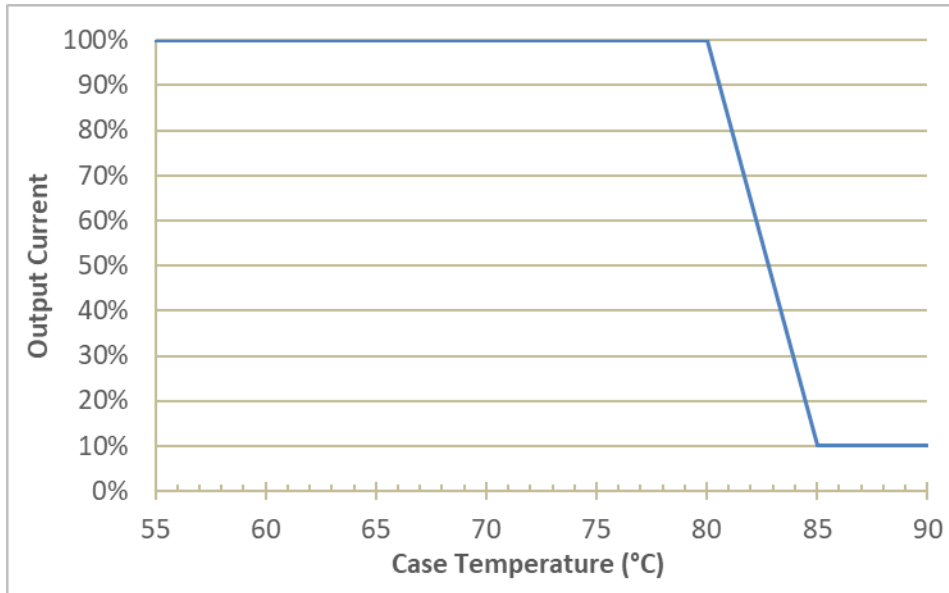

Example with the Output Current set to 2800mA, Starting Temperature set to 80°C, Ending Temperature set to 85°C and Ending Output Current set to 280mA (10%). These settings can be changed using the EVERset programming software.

Programmable Thermal Overload		
Feature	Range	Factory Default
Starting Temperature	25 - 85°C	Disabled
Ending Temperature	26 - 86°C	Disabled
Ending Output Current	10 - 2800mA	Disabled


\*Refer to application note EVD15 at [www.unvlt.com](http://www.unvlt.com) for additional information on Programmable Thermal Overload.

### Note:


When the Programmable Thermal Overload Foldback is disabled, the driver will reduce its output current to 50% if an internal temperature is reached that corresponds with the max case temperature plus margin. The driver will reduce its output current to 10% if the measured temperature continues to rise, and will return to full current if the measured temperature drops below the max case temperature.

Application and operation performance specification information subject to change without notification.

## Dimensional Diagram

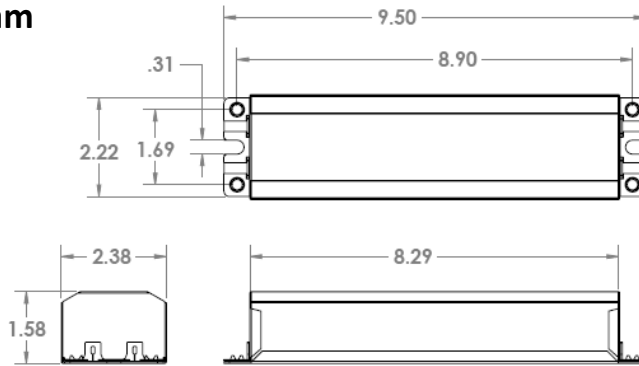

## Tc Location

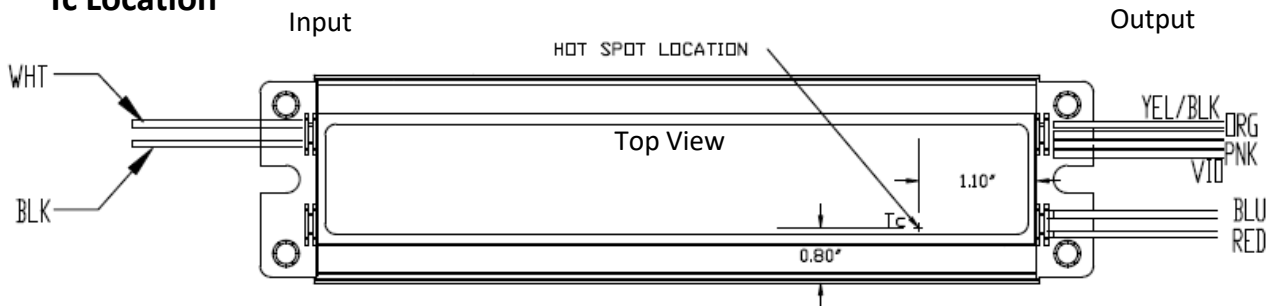

FCC Statement: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use. Call 1-800-225-5278 for technical assistance.

Application and operation performance specification information subject to change without notification.

Transient Protection		
Transient	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
IEEE C62.41 1.2/50µs Combination Wave (w/t 2Ω)	> 6kV**	> 6kV**

\*\*Driver uses MOVs for transient protection.

Refer to application note EVD07 at [www.unvlt.com](http://www.unvlt.com) for additional information on Hi-Pot Testing.

Isolation				
Isolation	Input	Output	0-10V	Enclosure
Input	-	2xU + 1kV	2.5kV	410V
Output	2xU + 1kV	-	2.5kV	2xU + 1kV
0-10V	2.5kV	2.5kV	-	2.5kV
Enclosure	410V	2xU + 1kV	2.5kV	-

U = Max Input Voltage

Application and operation performance specification information subject to change without notification.