


## DA40W 120V SERIESR1

Constant Current / Constant Voltage



|               |                      |
|---------------|----------------------|
| Efficiency    | >85%                 |
| Power Factor  | >0.95                |
| Case TC       | 90°C Max.            |
| Protection    | Input / Output       |
| Storage       | -30°C / +90°C        |
| Humidity      | 95% RH Max.          |
| IP Rating     | IP 60, 65, 67        |
| Class         | Class 2 Power Supply |
| Dimming       | ELV, TRIAC           |
| Optional Dim. | 0-10V                |

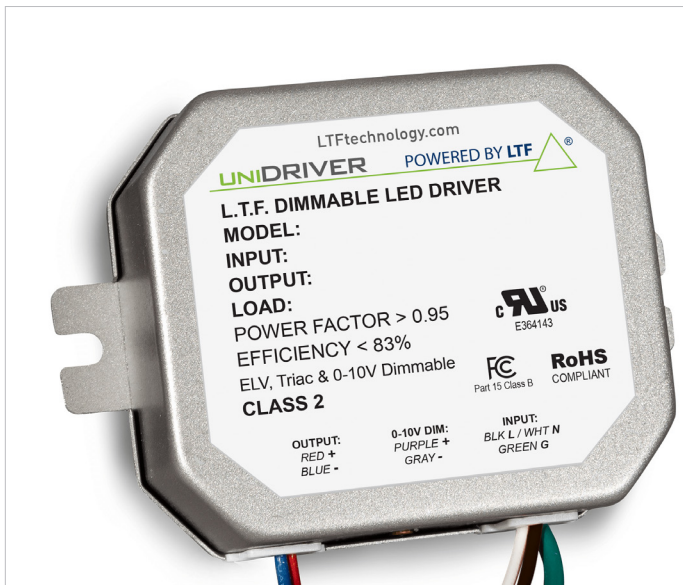

- Isolated output power per NEC and UL safety requirements
- UL and ETL recognized/ Listed, UL8750, 1310
- Auto-reset; Short circuit, Overload and thermal protection
- Dimmable with ELV and TRIAC type dimmers

### FEATURES

- Aluminum casing for optimal heat dissipation
- Low profile, small form factor, junction box mountable
- Flicker free dimming and excellent dimming range
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD, FCC compliant

### MODEL SPECIFICATIONS

| CONSTANT CURRENT |                    |               |                |                |                        |
|------------------|--------------------|---------------|----------------|----------------|------------------------|
| Model Number     | Input Voltage      | Input Current | Output Voltage | Output Current | Available Form Factor  |
| DA40W700C        | 120V AC<br>50/60Hz | 0.33 A        | 57.2V DC       | 700mA          | BF2, BF21, F2, F3, LS3 |
| DA40W750C        |                    | 0.33 A        | 53.4V DC       | 750mA          | BF2, BF21, F2, F3, LS3 |
| DA40W780C        |                    | 0.33 A        | 51.3V DC       | 780mA          | BF2, BF21, F2, F3, LS3 |
| DA40W900C        |                    | 0.33 A        | 44.5V DC       | 900mA          | BF2, BF21, F2, F3, LS3 |
| DA40W950C        |                    | 0.33 A        | 42.2V DC       | 950mA          | BF2, BF21, F2, F3, LS3 |
| DA40W980C        |                    | 0.33 A        | 40.9V DC       | 980mA          | BF2, BF21, F2, F3, LS3 |
| DA40W1000C       |                    | 0.33 A        | 40.0V DC       | 1000mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1050C       |                    | 0.33 A        | 38.1V DC       | 1050mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1100C       |                    | 0.33 A        | 36.4V DC       | 1100mA         | BF2, BF21, F2, F3, LS3 |

**CONSTANT CURRENT**

| Model Number | Input Voltage      | Input Current | Output Voltage | Output Current | Available Form Factor  |
|--------------|--------------------|---------------|----------------|----------------|------------------------|
| DA40W1130C   | 120V AC<br>50/60Hz | 0.33 A        | 35.4V DC       | 1130mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1200C   |                    | 0.33 A        | 33.4V DC       | 1200mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1250C   |                    | 0.33 A        | 32.0V DC       | 1250mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1280C   |                    | 0.33 A        | 31.3V DC       | 1280mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1300C   |                    | 0.33 A        | 30.8V DC       | 1300mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1350C   |                    | 0.33 A        | 29.7V DC       | 1350mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1400C   |                    | 0.33 A        | 28.6V DC       | 1400mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1420C   |                    | 0.33 A        | 28.2V DC       | 1420mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1480C   |                    | 0.33 A        | 27.1V DC       | 1480mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1500C   |                    | 0.33 A        | 26.7V DC       | 1500mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1550C   | 120V AC<br>50/60Hz | 0.33 A        | 25.9V DC       | 1550mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1600C   |                    | 0.33 A        | 25.0V DC       | 1600mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1680C   |                    | 0.33 A        | 23.9V DC       | 1680mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1700C   |                    | 0.33 A        | 23.6V DC       | 1700mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1750C   |                    | 0.33 A        | 22.9V DC       | 1750mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1820C   |                    | 0.33 A        | 21.9V DC       | 1820mA         | BF2, BF21, F2, F3, LS3 |
| DA40W1900C   |                    | 0.33 A        | 21.1V DC       | 1900mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2000C   |                    | 0.33 A        | 20.0V DC       | 2000mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2050C   |                    | 0.33 A        | 19.6V DC       | 2050mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2100C   | 120V AC<br>50/60Hz | 0.33 A        | 19.1V DC       | 2100mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2200C   |                    | 0.33 A        | 18.2V DC       | 2200mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2350C   |                    | 0.33 A        | 17.1V DC       | 2350mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2400C   |                    | 0.33 A        | 16.7V DC       | 2400mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2450C   |                    | 0.33 A        | 16.4V DC       | 2450mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2500C   |                    | 0.33 A        | 16.0V DC       | 2500mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2600C   |                    | 0.33 A        | 15.4V DC       | 2600mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2800C   |                    | 0.33 A        | 14.3V DC       | 2800mA         | BF2, BF21, F2, F3, LS3 |
| DA40W2850C   |                    | 0.33 A        | 14.1V DC       | 2850mA         | BF2, BF21, F2, F3, LS3 |
| DA40W3000C   |                    | 0.33 A        | 13.4V DC       | 3000mA         | BF2, BF21, F2, F3, LS3 |


**CONSTANT VOLTAGE**

| Model Number | Input Voltage | Input Current | Output Voltage | Output Current | Available Form Factor  |
|--------------|---------------|---------------|----------------|----------------|------------------------|
| DA40W12V     | 120V 50/60Hz  | 0.33 A        | 12V DC         | 3300mA         | BF2, BF21, F2, F3, LS3 |
| DA40W24V     | 120V 50/60Hz  | 0.33 A        | 24V DC         | 1700mA         | BF2, BF21, F2, F3, LS3 |


## MECHANICAL SPECS

| FORM FACTOR | DIMENSIONS                |
|-------------|---------------------------|
| BF2         | 92 x 52 x 30mm            |
| BF21        | 95 x 45 x 25.4mm          |
| F2          | 148 (138) x 39 x 24.4mm   |
| F3          | 89.6 (71.6) x 62.6 x 30mm |
| LS3         | 298 (282) x 30 x 20mm     |


**BF2**

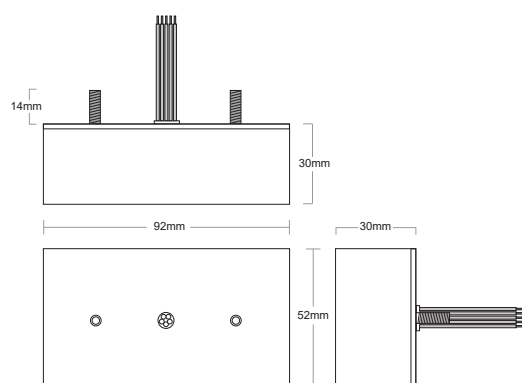


**BF21**

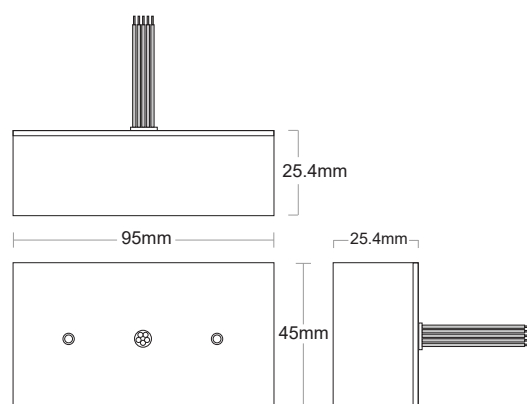


**F2**

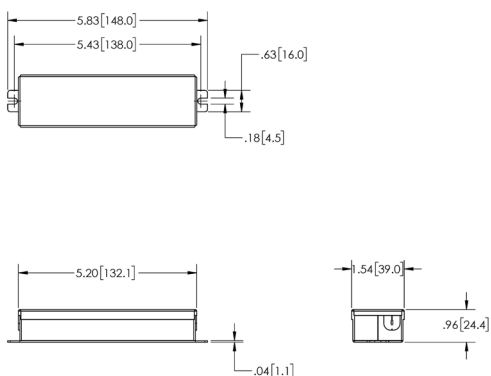

**F3**

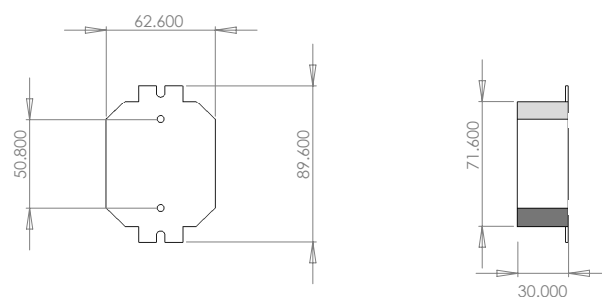


## LS3

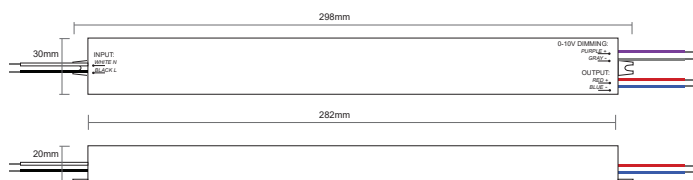


## REMOTE ENCLOSURES

| FORM FACTOR | DIMENSIONS             |
|-------------|------------------------|
| G2          | 92 x 52 x 30mm         |
| G3          | 280 (242) x 103 x 56mm |

### G2

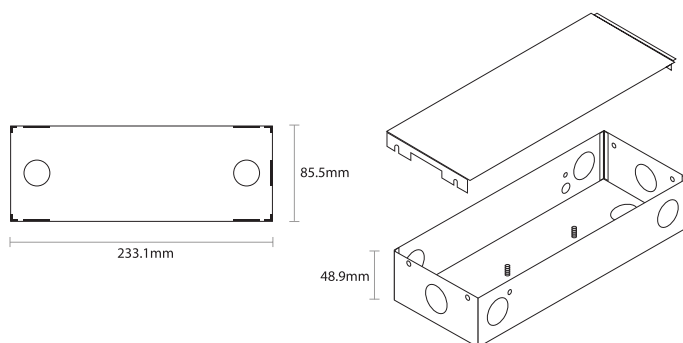


### G3

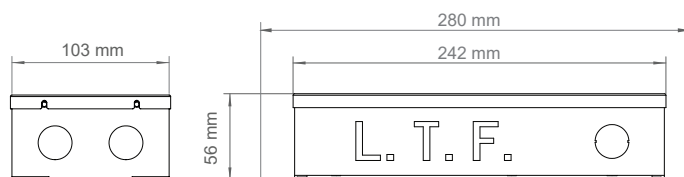

## DE40W 277V SERIESR1

Constant Current / Constant Voltage

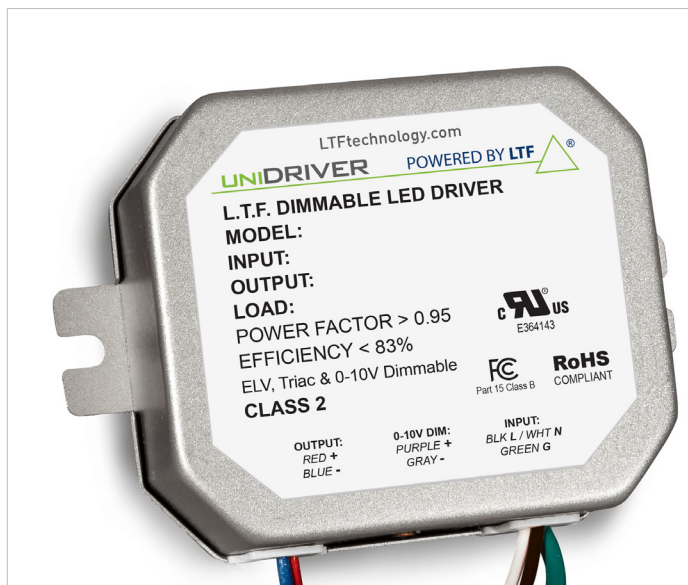

|               |                      |
|---------------|----------------------|
| Efficiency    | >85%                 |
| Power Factor  | >0.95                |
| Case TC       | 90°C Max.            |
| Protection    | Input / Output       |
| Storage       | -30°C / +90°C        |
| Humidity      | 95% RH Max.          |
| IP Rating     | IP 60, 65, 67        |
| Class         | Class 2 Power Supply |
| Dimming       | ELV, TRIAC           |
| Optional Dim. | 0-10V                |



**RoHS**



- Isolated output power per NEC and UL safety requirements
- UL and ETL recognized/ Listed, UL8750, 1310
- Auto-reset; Short circuit, Overload and thermal protection
- Dimmable with ELV and TRIAC type dimmers

### FEATURES

- Aluminum casing for optimal heat dissipation
- Low profile, small form factor, junction box mountable
- Flicker free dimming and excellent dimming range
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD, FCC compliant

### MODEL SPECIFICATIONS

| CONSTANT CURRENT |                    |               |                |                |                        |
|------------------|--------------------|---------------|----------------|----------------|------------------------|
| Model Number     | Input Voltage      | Input Current | Output Voltage | Output Current | Available Form Factor  |
| DE40W700C        | 277V AC<br>50/60Hz | 0.14 A        | 57.2V DC       | 700mA          | BF2, BF21, F2, F3, LS3 |
| DE40W750C        |                    | 0.14 A        | 53.4V DC       | 750mA          | BF2, BF21, F2, F3, LS3 |
| DE40W780C        |                    | 0.14 A        | 51.3V DC       | 780mA          | BF2, BF21, F2, F3, LS3 |
| DE40W900C        |                    | 0.14 A        | 44.5V DC       | 900mA          | BF2, BF21, F2, F3, LS3 |
| DE40W950C        |                    | 0.14 A        | 42.2V DC       | 950mA          | BF2, BF21, F2, F3, LS3 |
| DE40W980C        |                    | 0.14 A        | 40.9V DC       | 980mA          | BF2, BF21, F2, F3, LS3 |
| DE40W1000C       |                    | 0.14 A        | 40.0V DC       | 1000mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1050C       |                    | 0.14 A        | 38.1V DC       | 1050mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1100C       |                    | 0.14 A        | 36.4V DC       | 1100mA         | BF2, BF21, F2, F3, LS3 |

**CONSTANT CURRENT**

| Model Number | Input Voltage      | Input Current | Output Voltage | Output Current | Available Form Factor  |
|--------------|--------------------|---------------|----------------|----------------|------------------------|
| DE40W1130C   | 277V AC<br>50/60Hz | 0.14 A        | 35.4V DC       | 1130mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1200C   |                    | 0.14 A        | 33.4V DC       | 1200mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1250C   |                    | 0.14 A        | 32.0V DC       | 1250mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1280C   |                    | 0.14 A        | 31.3V DC       | 1280mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1300C   |                    | 0.14 A        | 30.8V DC       | 1300mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1350C   |                    | 0.14 A        | 29.7V DC       | 1350mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1400C   |                    | 0.14 A        | 28.6V DC       | 1400mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1420C   |                    | 0.14 A        | 28.2V DC       | 1420mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1480C   |                    | 0.14 A        | 27.1V DC       | 1480mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1500C   | 277V AC<br>50/60Hz | 0.14 A        | 26.7V DC       | 1500mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1550C   |                    | 0.14 A        | 25.9V DC       | 1550mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1600C   |                    | 0.14 A        | 25.0V DC       | 1600mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1680C   |                    | 0.14 A        | 23.9V DC       | 1680mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1700C   |                    | 0.14 A        | 23.6V DC       | 1700mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1750C   |                    | 0.14 A        | 22.9V DC       | 1750mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1820C   |                    | 0.14 A        | 21.9V DC       | 1820mA         | BF2, BF21, F2, F3, LS3 |
| DE40W1900C   |                    | 0.14 A        | 21.1V DC       | 1900mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2000C   |                    | 0.14 A        | 20.0V DC       | 2000mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2050C   | 277V AC<br>50/60Hz | 0.14 A        | 19.6V DC       | 2050mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2100C   |                    | 0.14 A        | 19.1V DC       | 2100mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2200C   |                    | 0.14 A        | 18.2V DC       | 2200mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2350C   |                    | 0.14 A        | 17.1V DC       | 2350mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2400C   |                    | 0.14 A        | 16.7V DC       | 2400mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2450C   |                    | 0.14 A        | 16.4V DC       | 2450mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2500C   |                    | 0.14 A        | 16.0V DC       | 2500mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2600C   |                    | 0.14 A        | 15.4V DC       | 2600mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2800C   |                    | 0.14 A        | 14.3V DC       | 2800mA         | BF2, BF21, F2, F3, LS3 |
| DE40W2850C   | 277V AC<br>50/60Hz | 0.14 A        | 14.1V DC       | 2850mA         | BF2, BF21, F2, F3, LS3 |
| DE40W3000C   |                    | 0.14 A        | 13.4V DC       | 3000mA         | BF2, BF21, F2, F3, LS3 |


**CONSTANT VOLTAGE**

| Model Number | Input Voltage | Input Current | Output Voltage | Output Current | Available Form Factor  |
|--------------|---------------|---------------|----------------|----------------|------------------------|
| DE40W12V     | 277V 50/60Hz  | 0.14 A        | 12V DC         | 3300mA         | BF2, BF21, F2, F3, LS3 |
| DE40W24V     | 277V 50/60Hz  | 0.14 A        | 24V DC         | 1700mA         | BF2, BF21, F2, F3, LS3 |


## MECHANICAL SPECS

| FORM FACTOR | DIMENSIONS                |
|-------------|---------------------------|
| BF2         | 92 x 52 x 30mm            |
| BF21        | 95 x 45 x 25.4mm          |
| F2          | 148 (138) x 39 x 24.4mm   |
| F3          | 89.6 (71.6) x 62.6 x 30mm |
| LS3         | 298 (282) x 30 x 20mm     |


**BF2**

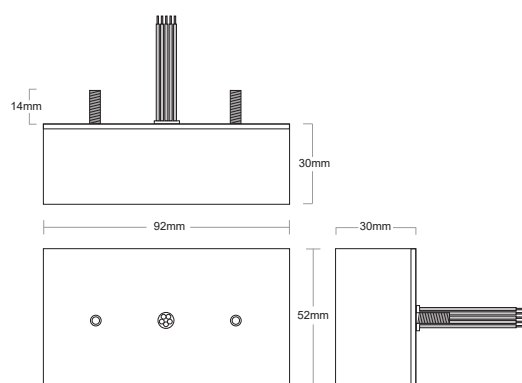


**BF21**

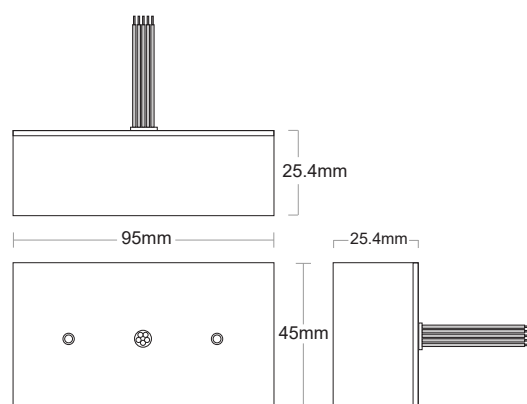


**F2**

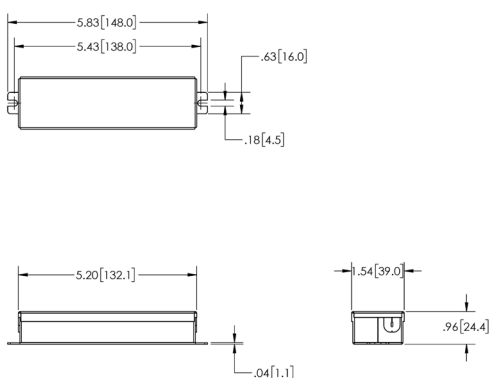

**F3**

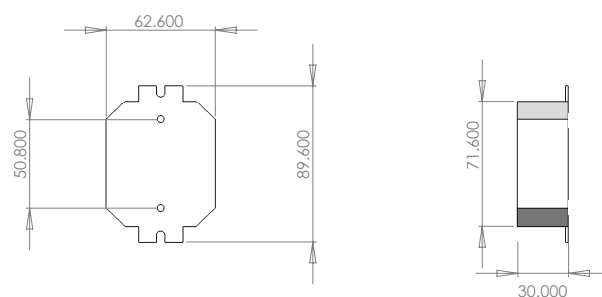


## LS3

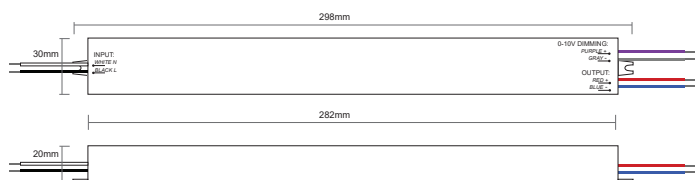


## REMOTE ENCLOSURES

| FORM FACTOR | DIMENSIONS             |
|-------------|------------------------|
| G2          | 92 x 52 x 30mm         |
| G3          | 280 (242) x 103 x 56mm |

## G2

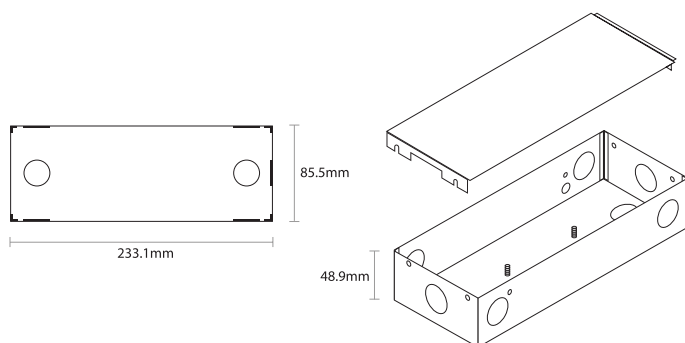


## G3

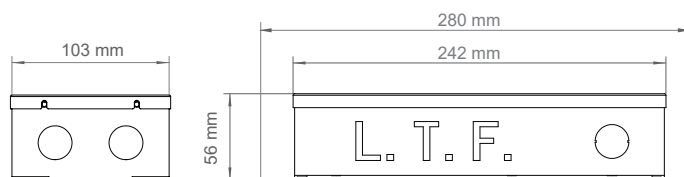

## DU40W 220V-240V SERIESR1

Constant Current / Constant Voltage

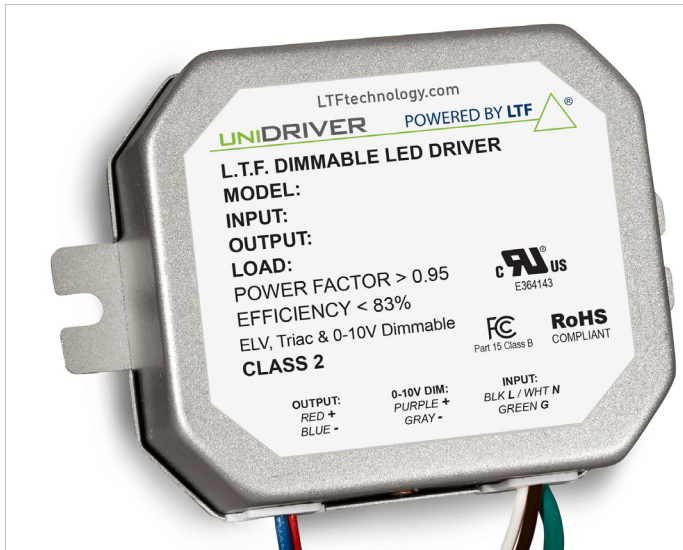

|               |                      |
|---------------|----------------------|
| Efficiency    | >85%                 |
| Power Factor  | >0.95                |
| Case TC       | 90°C Max.            |
| Protection    | Input / Output       |
| Storage       | -30°C / +90°C        |
| Humidity      | 95% RH Max.          |
| IP Rating     | IP 60, 65, 67        |
| Class         | Class 2 Power Supply |
| Dimming       | ELV, TRIAC           |
| Optional Dim. | 0-10V                |



### FEATURES

- Isolated output power per NEC and UL safety requirements
- UL and ETL recognized/ Listed, UL8750, 1310
- Auto-reset; Short circuit, Overload and thermal protection
- Dimmable with ELV and TRIAC type dimmers
- Aluminum casing for optimal heat dissipation
- Low profile, small form factor, junction box mountable
- Flicker free dimming and excellent dimming range
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD, FCC compliant

### MODEL SPECIFICATIONS

| CONSTANT CURRENT |                         |               |                |                |                        |
|------------------|-------------------------|---------------|----------------|----------------|------------------------|
| Model Number     | Input Voltage           | Input Current | Output Voltage | Output Current | Available Form Factor  |
| DU40W700C        | 220V-240V AC<br>50/60Hz | 0.18 A        | 57.2V DC       | 700mA          | BF2, BF21, F2, F3, LS3 |
| DU40W750C        |                         | 0.18 A        | 53.4V DC       | 750mA          | BF2, BF21, F2, F3, LS3 |
| DU40W780C        |                         | 0.18 A        | 51.3V DC       | 780mA          | BF2, BF21, F2, F3, LS3 |
| DU40W900C        |                         | 0.18 A        | 44.5V DC       | 900mA          | BF2, BF21, F2, F3, LS3 |
| DU40W950C        |                         | 0.18 A        | 42.2V DC       | 950mA          | BF2, BF21, F2, F3, LS3 |
| DU40W980C        |                         | 0.18 A        | 40.9V DC       | 980mA          | BF2, BF21, F2, F3, LS3 |
| DU40W1000C       |                         | 0.18 A        | 40.0V DC       | 1000mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1050C       |                         | 0.18 A        | 38.1V DC       | 1050mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1100C       |                         | 0.18 A        | 36.4V DC       | 1100mA         | BF2, BF21, F2, F3, LS3 |

**CONSTANT CURRENT**

| Model Number | Input Voltage           | Input Current | Output Voltage | Output Current | Available Form Factor  |
|--------------|-------------------------|---------------|----------------|----------------|------------------------|
| DU40W1130C   | 220V-240V AC<br>50/60Hz | 0.18 A        | 35.4V DC       | 1130mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1200C   |                         | 0.18 A        | 33.4V DC       | 1200mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1250C   |                         | 0.18 A        | 32.0V DC       | 1250mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1280C   |                         | 0.18 A        | 31.3V DC       | 1280mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1300C   |                         | 0.18 A        | 30.8V DC       | 1300mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1350C   |                         | 0.18 A        | 29.7V DC       | 1350mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1400C   |                         | 0.18 A        | 28.6V DC       | 1400mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1420C   |                         | 0.18 A        | 28.2V DC       | 1420mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1480C   |                         | 0.18 A        | 27.1V DC       | 1480mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1500C   | 220V-240V AC<br>50/60Hz | 0.18 A        | 26.7V DC       | 1500mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1550C   |                         | 0.18 A        | 25.9V DC       | 1550mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1600C   |                         | 0.18 A        | 25.0V DC       | 1600mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1680C   |                         | 0.18 A        | 23.9V DC       | 1680mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1700C   |                         | 0.18 A        | 23.6V DC       | 1700mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1750C   |                         | 0.18 A        | 22.9V DC       | 1750mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1820C   |                         | 0.18 A        | 21.9V DC       | 1820mA         | BF2, BF21, F2, F3, LS3 |
| DU40W1900C   |                         | 0.18 A        | 21.1V DC       | 1900mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2000C   |                         | 0.18 A        | 20.0V DC       | 2000mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2050C   |                         | 0.18 A        | 19.6V DC       | 2050mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2100C   | 220V-240V AC<br>50/60Hz | 0.18 A        | 19.1V DC       | 2100mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2200C   |                         | 0.18 A        | 18.2V DC       | 2200mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2350C   |                         | 0.18 A        | 17.1V DC       | 2350mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2400C   |                         | 0.18 A        | 16.7V DC       | 2400mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2450C   |                         | 0.18 A        | 16.4V DC       | 2450mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2500C   |                         | 0.18 A        | 16.0V DC       | 2500mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2600C   |                         | 0.18 A        | 15.4V DC       | 2600mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2800C   |                         | 0.18 A        | 14.3V DC       | 2800mA         | BF2, BF21, F2, F3, LS3 |
| DU40W2850C   |                         | 0.18 A        | 14.1V DC       | 2850mA         | BF2, BF21, F2, F3, LS3 |
| DU40W3000C   |                         | 0.18 A        | 13.4V DC       | 3000mA         | BF2, BF21, F2, F3, LS3 |


**CONSTANT VOLTAGE**

| Model Number | Input Voltage     | Input Current | Output Voltage | Output Current | Available Form Factor  |
|--------------|-------------------|---------------|----------------|----------------|------------------------|
| DU40W12V     | 220V-240V 50/60Hz | 0.18 A        | 12V DC         | 3300mA         | BF2, BF21, F2, F3, LS3 |
| DU40W24V     | 220V-240V 50/60Hz | 0.18 A        | 24V DC         | 1700mA         | BF2, BF21, F2, F3, LS3 |


## MECHANICAL SPECS

| FORM FACTOR | DIMENSIONS                |
|-------------|---------------------------|
| BF2         | 92 x 52 x 30mm            |
| BF21        | 95 x 45 x 25.4mm          |
| F2          | 148 (138) x 39 x 24.4mm   |
| F3          | 89.6 (71.6) x 62.6 x 30mm |
| LS3         | 298 (282) x 30 x 20mm     |


**BF2**

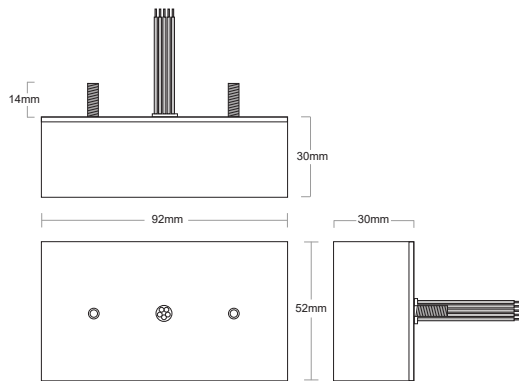


**BF21**

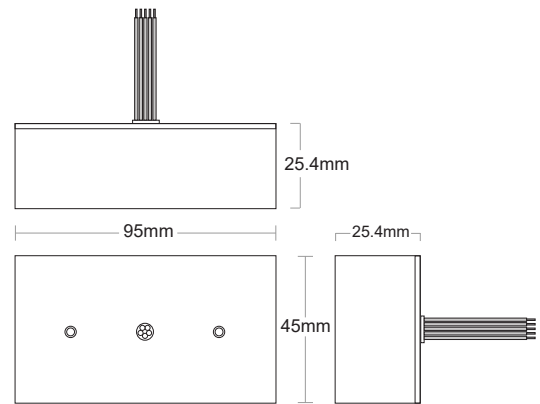


**F2**

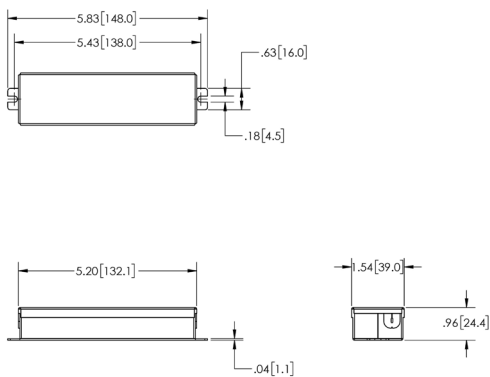

**F3**

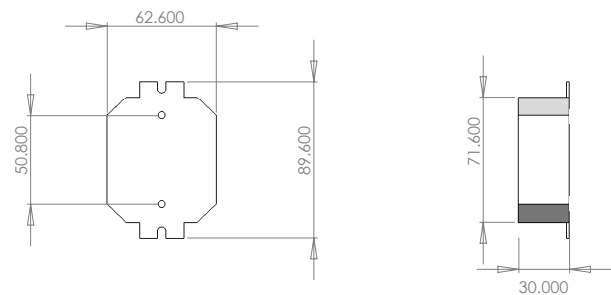


## LS3

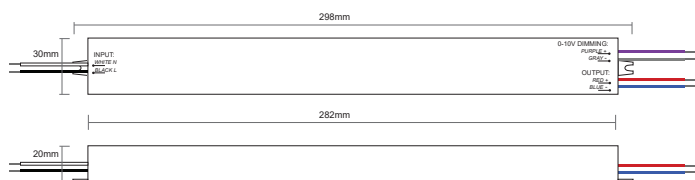

## REMOTE ENCLOSURES

| FORM FACTOR | DIMENSIONS             |
|-------------|------------------------|
| G2          | 92 x 52 x 30mm         |
| G3          | 280 (242) x 103 x 56mm |

## G2

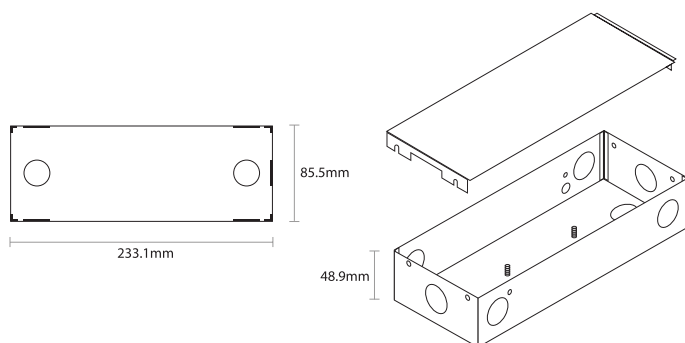

## G3

