



LED PAR38

13PAR38/COR/930/F25/DIM/P/ULW/T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General Information		Temperature	
Cap-Base	E26 [Single Contact Medium Screw]	Warm-up time to 60% light	0.5 s
Nominal lifetime	25,000 hour(s)	Power Factor (Fraction)	0.7
Switching Cycle	50,000	Voltage (Nom)	120 V
Lighting Technology	LED	Temperature	
Light Technical		T-Case Maximum (Nom)	185 °F
Color Code	930 [CCT of 3000K]	Controls and Dimming	
Beam Angle (Nom)	25 degree(s)	Dimmable	Only with specific dimmers
Luminous Flux	1,300 lm	Mechanical and Housing	
Luminous Intensity (Nom)	6,000 cd	Bulb Finish	Clear
Color Designation	White (WH)	Bulb Material	Plastic
Correlated Color Temperature (Nom)	3000 K	Bulb Shape	PAR38
Luminous Efficacy (rated) (Nom)	100 lm/W	UL Wet/ damp/ dry location	Wet location
Color Consistency	<4	Net Weight (Piece)	0.331 lb
Color rendering index (CRI)	90	Approval and Application	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Suitable For Accent Lighting	Yes
Operating and Electrical		EU RoHS compliant	Yes
Input Frequency	60 Hz	T20 compliant	Yes
Power Consumption	13 W	Ambient temperature range	-40 to +113 °F
Lamp Current (Nom)	150 mA		
Wattage Equivalent	120 W		
Starting Time (Nom)	0.5 s		

LED PAR38

Application Conditions


can it be used in closed luminaires Yes

Product Data

Order product name	13PAR38/COR/930/F25/DIM/P/ULW/T20 6/1FB
Full product name	13PAR38/COR/930/F25/DIM/P/ULW/T20 6/1FB



Order code	586131
Material Nr. (12NC)	929003737104
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677586133
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677586138

Dimensional drawing




Product	D	C
13PAR38/COR/930/F25/DIM/P/ULW/T20 6/1FB	4-7/8 inch	5-1/8 inch

Photometric data

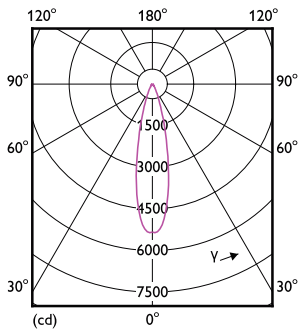

Light Distribution Diagram - 13PAR38/COR/930/F25/DIM/P/ULW/T20 6/1FB



Accent Lighting Spots - 13PAR38/COR/930/F25/DIM/P/ULW/T20 6/1FB

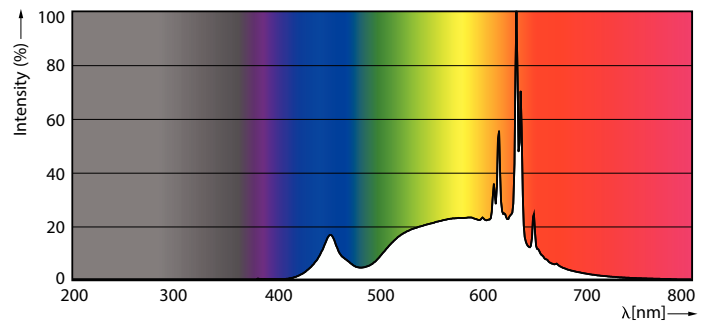

Spectral Power Distribution Colour - 13PAR38/COR/930/F25/DIM/P/ULW/T20 6/1FB

LED PAR38

Lifetime

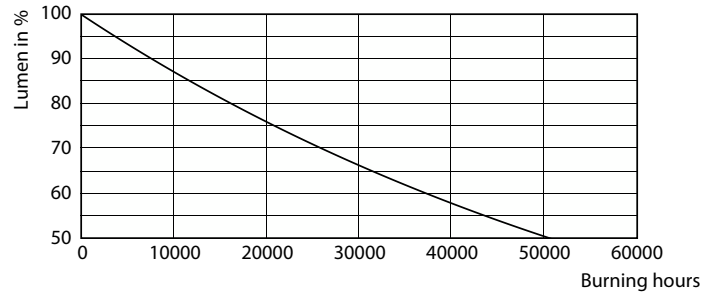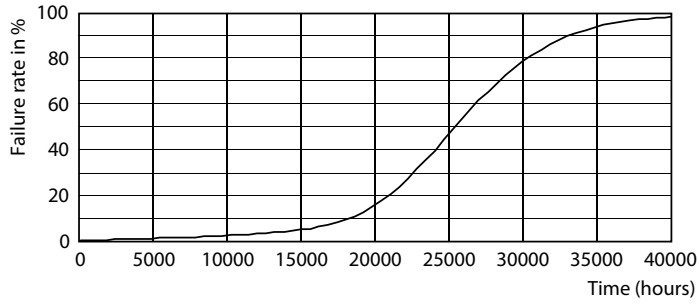

Life Expectancy Diagram

Lumen Maintenance Diagram - 13PAR38/COR/930/F25/DIM/P/ULW/T20
6/1FB

