


Project Name:	Type:
Part Number:	Date:

CCT SELECT EMERGENCY TLED


FEATURES

- Replaces 4' T8 Fluorescent lamp
- Double ended wiring, Bypass application, operates on 120V-277V line voltage
- Built in Lithium battery produces 600 lumens in emergency mode
- 90 minutes of constant power in emergency mode
- Continuous self testing in standard and emergency mode
- SelectKelvin switch for CCT selectability (3500K/4000K/5000K)
- Plastic/Aluminum housing eliminates breakage
- Fixture operating temperature: 32°F to 95°F (0°C to 35°C)
- Lamp ambient temperature: 32°F to 113°F (0°C to 45°C)
- Suitable for use in enclosed fixture and damp locations
- L70 rated lifetime up to 50,000 hours
- 5 year limited warranty*

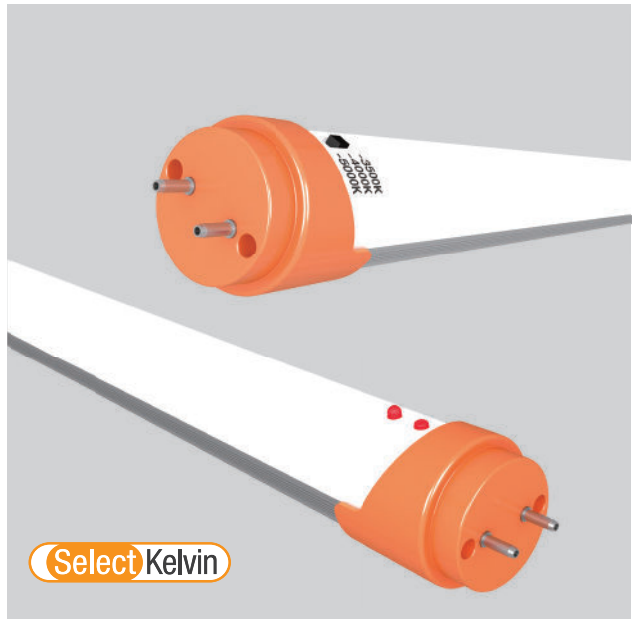

032723

FOCUS FEATURE

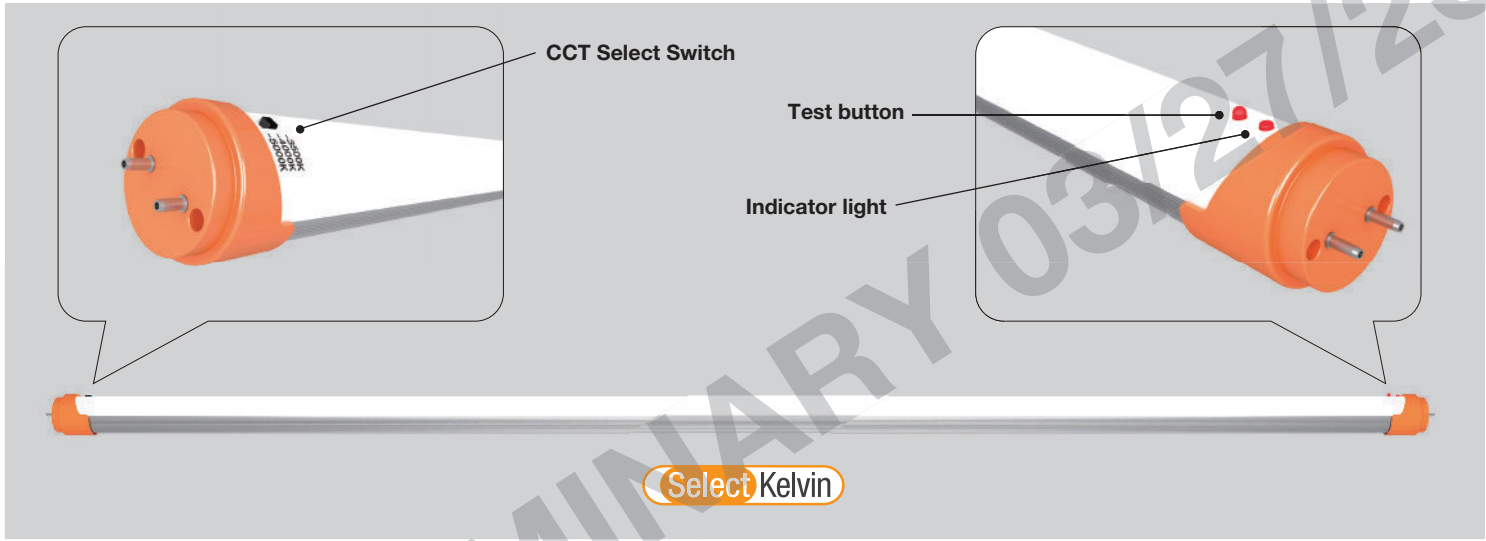

SPECIFICATIONS

Product	Model	Mode	CCT	Lumens	Efficacy (LPW)	Equiv.	Wattage	Nominal Length	CRI	Life (hrs)	Beam Angle
37410	15T8/4F/8CCTS/EM	CCT Selectable	3500K	1900	127	32W	15	4'	82	50,000	140°
			4000K	2000	133						
			5000K	2000	133						
		Emergency	600	133	N.A.	4.5					

* Please visit www.greencreative.com for Limited Warranty terms.



CCT SELECT EMERGENCY TLED



DIMENSION & WEIGHT



Model	15T8/4F/8CCTS/EM
Base	G13
MOL	47-3/16"
Dia.	1-1/16"
Weight	1.18lb

Where xxx means 824-965 which indicates CRI and color temperature

INSTALLATION

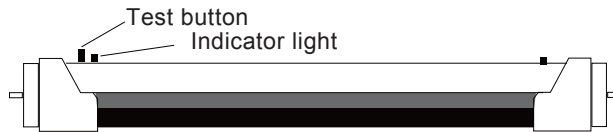

LED tube wiring diagram without dimming



- Testing Button
- Charge Indicator Light

ORDERING INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
15T8/4F/8CCTS/EM	N.A.	N.A.	N.A.	25PCS	51-11/16" x 8-1/16" x 8-7/8"	37.48lb

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.