

# PL V 16.5W BYP TITANIUM LED SERIES



PL:EDGE  
SERIES

16.5W REPLACES





42W  
CFL

60% Energy Savings

PRO



- High output 1900lm
- Built-in universal voltage driver - Bypass installation
- Compatible with G24d, GX24d, G24q & GX24q sockets
- Innovative round design
- Exceptional efficacy 115 LPW
- Available in 3000K, 3500K & 4000K CCT



DESIGNED FOR VERTICAL APPLICATIONS



# PL V 16.5W BYP

TITANIUM LED SERIES



## APPLICATIONS

### Retail




### Hospitality



### Office



<b>Base:</b>	G24d, GX24d, G24q & GX24q (2/4-pin CFL)
<b>Voltage:</b>	120-277V
<b>Dimmable:</b>	No
<b>PF:</b>	0.9
<b>Lifetime (L70):</b>	50,000 hrs
<b>Weight:</b>	0.66lb / 301g
<b>Min. compartment dimensions:</b>	7-13/16" (DIA)x 9-1/2"(H)

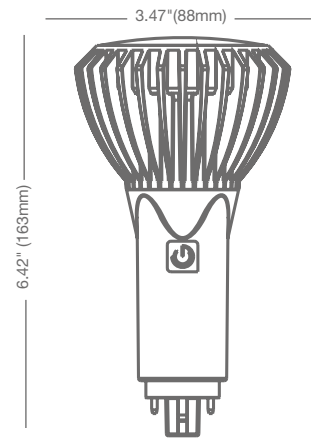

Ref.#: DS292-PLV-16.5W-BYP-230518

## SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
16.5PLV/830/BYP	98256	16.5	Warm White 3000K	82	1800	109	120°
16.5PLV/835/BYP	98257	16.5	Neutral White 3500K	82	1850	112	120°
16.5PLV/840/BYP	98258	16.5	Cool White 4000K	82	1900	115	120°

\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\* Not intended for use in enclosed fixtures

## ACCESSORY ORDERING INFORMATION

Model	Product	Description
23EMDRIVER	98003	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)