

Presented By: Candela Corporation
Contact Phone: 800-922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

27566 - 1691

GE S8 - Aircraft; Low Voltage

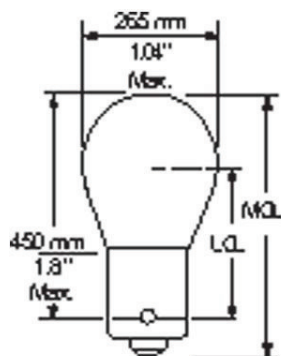

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Single Contact Bayonet (BA15s)
Filament	2C-2R
Rated Life (MIN)	17.0 h
Rated Life (Vert)	1000.0 h
Rated Life (NOM)	1000.0 h
Rated Life (Hor)	17.0 h
Atmosphere	Gas-filled
Primary Application	Aircraft; Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	188.0
Initial Lumens (NOM)	188.0
Initial Lumens (Hor)	11.05882
Nominal Initial Lumens per Watt (NOM)	11.05882
Center Beam Candlepower (CBCP) (NOM)	188.0
Mean Spherical Candlepower (MSCP) (NOM)	15.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	17.0
Voltage (MIN)	1000.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.120 in(28.4 mm)

PRODUCT INFORMATION

Product Code	27566
Description	1691
ANSI Code	1691
Standard Package	Case
Standard Package GTIN	00043168275668
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168963923