

T-3 1/4

Line No.	NAED	Description	Base Type	Life	Design Amps	Design Volts	Mea Spherical Candela	Filament	Fig. No.
53	35027	259	W2.1x9.2d	5000	0.25	6.3	0.65	C-2R	1
54	35133	313	Mini Bayonet	500	0.17	28	3.5	C-2F	4
55	35561	656	W2.1x9.2d	2500	0.06	28	0.62	C-2F	5
56	35565	657	W2.1x9.2d	2500	0.08	28	0.62	C-2F	5
57	35763	755	Mini Bayonet	20000	0.15	6.3	0.33	C-2R	2
58	35771	756	Mini Bayonet	15000	0.08	14	0.31	C-2F	4
59	35781	757	Mini Bayonet	7500	0.08	28	0.62	C-2F	4
60	35413	464	W2.1x9.2d	1500	0.17	28	3	C-2F	5
61	37329	1815	Mini Bayonet	3000	0.2	14	1.4	C-2V	—
62	37333	1816	Mini Bayonet	1000	0.33	13	3	C-2V	4
63	37351	1819	Mini Bayonet	2500	0.04	28	0.33	C-2F	4
64	37355	1820	Mini Bayonet	1000	0.1	28	1.6	C-2F	4
65	37367	1822	Mini Bayonet	1000	0.1	36	2.1	C-2F	4
66	37377	1829	Mini Bayonet	1000	0.07	28	1	C-2F	4
67	37387	1835	Mini Bayonet	5000+	0.05	55	1.1	C-5	4
68	37391	1847	Mini Bayonet	5000+	0.15	6.3	0.38	C-2R	2
69	37413	1864	Mini Bayonet	1500	0.17	28	3	C-2F	4
70	37505	1893	Mini Bayonet	2500	0.33	14	2	C-2F	4
71	39376	6421	SV8.5-8	1000	0.125	24	1.4	C-8	3
72	39397	6429	SV8.5-8	200	0.42	24	8.4	C-8	3
73	39405	6413	SV8.5-8	200	0.4	12	4	C-8	3
74	39407	6411	SV8.5-8	200	0.83	12	8	C-8	3
75	39411	6424	SV8.5-8	200	0.2	24	4.93	C-8	3




Fig. 1




Fig. 2

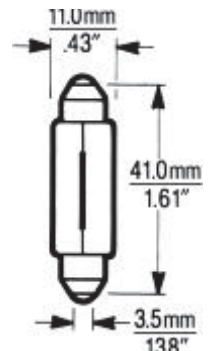


Fig. 3




Fig. 4



Fig. 5