

FILAMENT LINE



Suitable for All Decorative Applications




- Micro-designed driver - No heatsink required
- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls
- Most models are suitable for wet locations

PREMIUM FILAMENT LINE



Suitable for All Decorative Applications

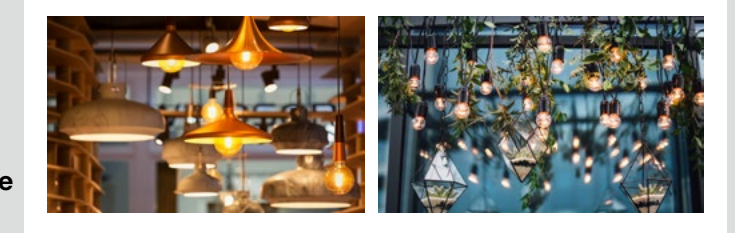

- Suitable for use in wet locations
- 320° omnidirectional beam angle
- High CRI and R values (R9 53, R13 93)
- Smooth dimming with most forward and reverse phase controls

| SPECIFICATIONS | | | | | | | | | | | | |
|----------------|----------------------|-------|--------|------------|-----|-----|--------|------------|------------|---------|-------------|-------------|
| Product | Model | CCT | Lumens | CRI (typ.) | LPW | Dim | Equiv. | Beam Angle | Life (hrs) | Voltage | Finish | ES / T20 |
| 98458 | 1FS14/820/A | 2000K | 35 | 82 | 75 | Yes | 10W | 300° | 15,000 | 120V | Amber | N.A. / N.A. |
| 98457 | 1FS14/827 | 2700K | 55 | 82 | 37 | Yes | 10W | 300° | 15,000 | 120V | Clear | N.A. / N.A. |
| 57946 | 3.5FT10DIM/822/A | 2200K | 250 | 82 | 90 | Yes | 25W | 330° | 15,000 | 120V | Amber | N.A. / N.A. |
| 98240 | 4.5FBA11DIM/820/FT/A | 2000K | 240 | 82 | 68 | Yes | 40W | 300° | 15,000 | 120V | Amber | N.A. / N.A. |
| 98241 | 3.3FB11DIM/927 | 2700K | 300 | 92 | 90 | Yes | 40W | 300° | 15,000 | 120V | Clear | ✓ / ✓ |
| 98454 | 5FB11DIM/827 | 2700K | 500 | 82 | 107 | Yes | 60W | 300° | 15,000 | 120V | Clear | N.A. / N.A. |
| 98455 | 5FB11DIM/827/E26 | 2700K | 500 | 82 | 93 | Yes | 60W | 300° | 15,000 | 120V | Clear | ✓ / N.A. |
| 98239 | 4FST19DIM/820/A | 2000K | 300 | 82 | 90 | Yes | 40W | 300° | 15,000 | 120V | Amber | N.A. / N.A. |
| 98376 | 5FA19DIM/827 | 2700K | 450 | 82 | 63 | Yes | 40W | 300° | 15,000 | 120V | Clear | N.A. / N.A. |
| 98448 | 7.5FA19DIM/820/A | 2000K | 600 | 82 | 94 | Yes | 60W | 300° | 15,000 | 120V | Amber | N.A. / N.A. |
| 98278 | 7.5FA19DIM/827 | 2700K | 800 | 82 | 91 | Yes | 60W | 300° | 15,000 | 120V | Clear | ✓ / N.A. |
| 98449 | 7.5FA19DIM827/FR | 2700K | 800 | 82 | 91 | Yes | 60W | 300° | 15,000 | 120V | Frosted | N.A. / N.A. |
| 98358 | 7.5FA19DIM/827/SB | 2700K | 700 | 82 | 53 | Yes | 60W | N.A. | 15,000 | 120V | Silver Bowl | N.A. / N.A. |
| 98279 | 9FA19DIM/927 | 2700K | 810 | 92 | 79 | Yes | 60W | 300° | 15,000 | 120V | Clear | ✓ / ✓ |
| 98451 | 4FG16.5DIM/827 | 2700K | 350 | 82 | 100 | Yes | 40W | 300° | 15,000 | 120V | Clear | N.A. / N.A. |
| 97826 | 4.5FG25DIM/827/SB | 2700K | 400 | 82 | 63 | Yes | 40W | N.A. | 15,000 | 120V | Silver Bowl | N.A. / N.A. |
| 57945 | 5FG40DIM/827 | 2700K | 470 | 82 | 35 | No | 40W | 330° | 15,000 | 120V | Clear | ✓ / N.A. |

| SPECIFICATIONS | | | | | | | | | | | | |
|----------------|------------------------|-------|--------|------------|-----|-----|--------|------------|------------|---------|-------------|-------------|
| Product | Model | CCT | Lumens | CRI (typ.) | LPW | Dim | Equiv. | Beam Angle | Life (hrs) | Voltage | Finish | ES / T20 |
| 36075 | 3FT6DIM/820/A/R | 2000K | 110 | 82 | 37 | Yes | 25W | 320° | 15,000 | 120V | Amber | N.A. / N.A. |
| 36077 | 1FS14/827/R | 2700K | 55 | 82 | 55 | No | 11W | 320° | 15,000 | 120V | Clear | N.A. / N.A. |
| 36078 | 1FS14/820/A/R | 2000K | 35 | 82 | 35 | No | 11W | 320° | 15,000 | 120V | Amber | N.A. / N.A. |
| 36079 | 5FA19DIM/927/R | 2700K | 450 | 92 | 90 | Yes | 40W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36080 | 5FA19DIM/927/FR/R | 2700K | 450 | 92 | 90 | Yes | 40W | 320° | 15,000 | 120V | Frosted | ✓ / ✓ |
| 36081 | 5FA19DIM/820/A/R | 2000K | 340 | 82 | 68 | Yes | 40W | 320° | 15,000 | 120V | Amber | N.A. / N.A. |
| 36082 | 9FA19DIM/927/R | 2700K | 810 | 92 | 90 | Yes | 60W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36083 | 9FA19DIM/927/FR/R | 2700K | 810 | 92 | 89 | Yes | 60W | 320° | 15,000 | 120V | Frosted | ✓ / ✓ |
| 36085 | 7.5FA19DIM/827/SB/R | 2700K | 700 | 82 | 93 | Yes | 60W | 320° | 15,000 | 120V | Silver Bowl | N.A. / N.A. |
| 36061 | 3.3FB11DIM/927/R | 2700K | 300 | 92 | 91 | Yes | 40W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36062 | 3.3FB11DIM/927/E26/R | 2700K | 300 | 92 | 91 | Yes | 40W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36063 | 3.3FB11DIM/927/FR/R | 2700K | 300 | 92 | 91 | Yes | 40W | 320° | 15,000 | 120V | Frosted | ✓ / ✓ |
| 36064 | 5.5FB11DIM/927/R | 2700K | 500 | 92 | 91 | Yes | 60W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36065 | 5.5FB11DIM/927/E26/R | 2700K | 500 | 92 | 91 | Yes | 60W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36066 | 3.5FBA11DIM/820/FT/A/R | 2000K | 240 | 82 | 69 | Yes | 40W | 320° | 15,000 | 120V | Amber | N.A. / N.A. |
| 36067 | 3.8FG16.5DIM/927/R | 2700K | 350 | 92 | 91 | Yes | 40W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36068 | 3.8FG16.5DIM/927/E26/R | 2700K | 350 | 92 | 91 | Yes | 40W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36069 | 4FG16.5DIM/820/A/R | 2000K | 250 | 82 | 63 | Yes | 40W | 320° | 15,000 | 120V | Amber | N.A. / N.A. |
| 36070 | 3.8FG25DIM/927/R | 2700K | 350 | 92 | 92 | Yes | 40W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |
| 36071 | 4FG25DIM/820/A/R | 2000K | 250 | 82 | 63 | Yes | 40W | 320° | 15,000 | 120V | Amber | N.A. / N.A. |
| 36072 | 4.5FG25DIM/827/SB/R | 2700K | 400 | 82 | 89 | Yes | 40W | 320° | 15,000 | 120V | Silver Bowl | N.A. / N.A. |
| 36073 | 5.5FG40DIM/927/R | 2700K | 500 | 92 | 91 | Yes | 60W | 320° | 15,000 | 120V | Clear | ✓ / ✓ |