



STARLED[®], INC.

BASED LEDs

T-2 TELEPHONE SLIDE BASE #1, #2, & #5 FLAT-TOP SINGLE CHIP LEDs

ORDERING INFORMATION:

5TSBF1121 WC 1 - 24V/25
(A) (B) (C) (D)

(A) MODEL

1TSBF1691
2TSBF1691
5TSBF1121

(B) LED LENS COLOR

WC = WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH

- *1 = ULTRA RED (660nm)
- U2 = ULTRA HI EFF. RED (623-630nm)
- U3 = ULTRA ORANGE (612-620nm)
- *S4 = ULTRA YELLOW (590-595nm)
- *6NW = ULTRA PURE GREEN (520-530nm)
- *8NW = FLUORESCENT "WHITE" (NO nm VALUE)
- *10NW = ULTRA BLUE (465-475nm)
- *11NW = BLUISH GREEN (498-508nm)
- *12NW = SOFT WHITE (NO nm VALUE)
- *Max. Continuous current 10mA.

(D) STANDARD DC & AC OPERATING VOLTAGES/mA

5V/25, 6V/25, 12V/25, 24V/25, 28V/25, 48V/12, 60V/15 & 120V/6

APPLICATION MUST BE SPECIFIED WHEN ORDERING:

VAC = ALTERNATING CURRENT VDC(V) = DIRECT CURRENT

Note: Please call factory for other voltages.

DIRECT INCANDESCENT LAMP REPLACEMENTS


1TSBF1691: A1, B2, C2, E1, 24E1, 24EX, ETC...
2TSBF1691: 6C, 10X, 12B, 24A, 24E, 24X, 35A, 48D, ETC...
5TSBF1121: 24PSB, 28PSB, 48PSB, 60PSB, 120PSB, ETC...

Note: For utility applications please call the factory.


HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

MODEL: 1TSBF1691

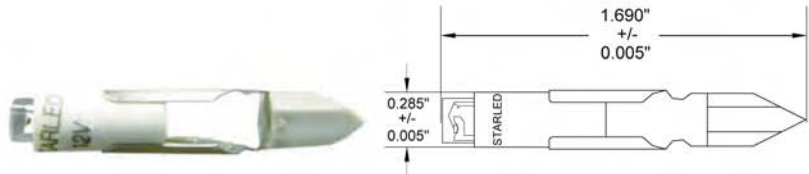

MODEL: 2TSBF1691

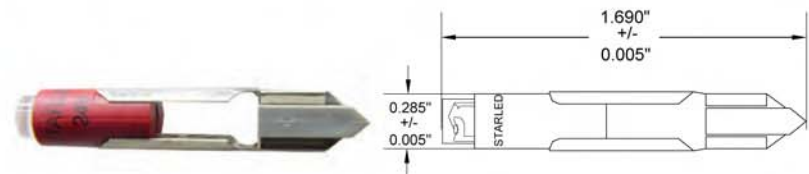

MODEL: 5TSBF1121

