


PREMIUM FILAMENT LINE



Suitable for All Decorative Applications

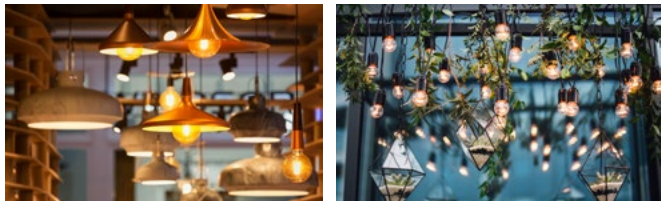

- Suitable for use in wet locations
- 320° omnidirectional beam angle
- High CRI and R values (R9 53, R13 93)
- Smooth dimming with most forward and reverse phase controls


SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Finish	ES / T20
36075	3FT6DIM/820/A/R	2000K	110	82	37	Yes	25W	320°	15,000	120V	Amber	N.A. / N.A.
36077	1FS14/827/R	2700K	55	82	55	No	11W	320°	15,000	120V	Clear	N.A. / N.A.
36078	1FS14/820/A/R	2000K	35	82	35	No	11W	320°	15,000	120V	Amber	N.A. / N.A.
36079	5FA19DIM/927/R	2700K	450	92	90	Yes	40W	320°	15,000	120V	Clear	✓/✓
36080	5FA19DIM/927/FR/R	2700K	450	92	90	Yes	40W	320°	15,000	120V	Frosted	✓/✓
36081	5FA19DIM/820/A/R	2000K	340	82	68	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36082	9FA19DIM/927/R	2700K	810	92	90	Yes	60W	320°	15,000	120V	Clear	✓/✓
36083	9FA19DIM/927/FR/R	2700K	810	92	89	Yes	60W	320°	15,000	120V	Frosted	✓/✓
36085	7.5FA19DIM/827/SB/R	2700K	700	82	93	Yes	60W	320°	15,000	120V	Silver Bowl	N.A. / N.A.
36061	3.3FB11DIM/927/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Clear	✓/✓
36062	3.3FB11DIM/927/E26/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Clear	✓/✓
36063	3.3FB11DIM/927/FR/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Frosted	✓/✓
36064	5.5FB11DIM/927/R	2700K	500	92	91	Yes	60W	320°	15,000	120V	Clear	✓/✓
36065	5.5FB11DIM/927/E26/R	2700K	500	92	91	Yes	60W	320°	15,000	120V	Clear	✓/✓
36066	3.5FBA11DIM/820/FT/A/R	2000K	240	82	69	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36067	3.8FG16.5DIM/927/R	2700K	350	92	91	Yes	40W	320°	15,000	120V	Clear	✓/✓
36068	3.8FG16.5DIM/927/E26/R	2700K	350	92	91	Yes	40W	320°	15,000	120V	Clear	✓/✓
36069	4FG16.5DIM/820/A/R	2000K	250	82	63	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36070	3.8FG25DIM/927/R	2700K	350	92	92	Yes	40W	320°	15,000	120V	Clear	✓/✓
36071	4FG25DIM/820/A/R	2000K	250	82	63	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36072	4.5FG25DIM/827/SB/R	2700K	400	82	89	Yes	40W	320°	15,000	120V	Silver Bowl	N.A. / N.A.
36073	5.5FG40DIM/927/R	2700K	500	92	91	Yes	60W	320°	15,000	120V	Clear	- / -

DECORATIVE LINE



Suitable for All Decorative Applications

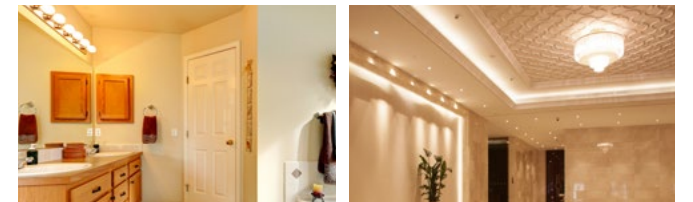

- Suitable to replace 40W / 60W incandescent lamps
- Suitable for use in totally enclosed fixtures
- Suitable for use in damp locations

SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / T20
35165	3.8G25DIM/927	2700K	350	92	92	Yes	40W	280°	15,000	120V	Yes	✓/✓
34928	4B11DIM/827	2700K	300	82	75	Yes	40W	110°	25,000	120V	No	✓/N.A.
34929	4B11DIM/827/E26	2700K	300	82	75	Yes	40W	110°	25,000	120V	No	✓/N.A.
34930	6.5B13DIM/827	2700K	500	82	77	Yes	60W	230°	25,000	120V	No	✓/N.A.