

**Presented By:** Candela Corporation  
**Contact Phone:** (800) 922-9226  
**Contact E-mail:** sales@candelacorp.com



**Customer Name:**  
**Project Name:**  
**Fixture Type:**



GE  
Lighting

## 20853 - 300PAR56/NSP

GE PAR56 - Narrow Spot

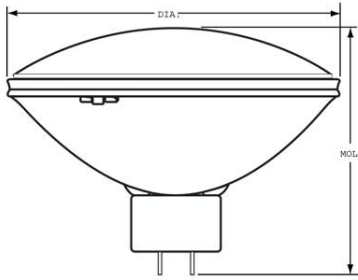

### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Extended Mogul End Prong (GX16d EXT)
Filament	CC-13
Wattage	300
Voltage	230
Rated Life	2000 hrs
Primary Application	Narrow Spot

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	3450
Center Beam Candlepower (CBCP)	40000
Nominal Initial Lumens per Watt	11

### DIMENSIONS

Maximum Overall Length (MOL)	5.0000 in(127.0 mm)
Bulb Diameter (DIA)	7.000 in(177.8 mm)
Bulb Diameter (DIA) (MAX)	7.000 in(177.8 mm)

### PRODUCT INFORMATION

Product Code	20853
Description	300PAR56/NSP
Standard Package	Case
Standard Package GTIN	10043168208533
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168208536

### CAUTIONS & WARNINGS

#### Warning

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Use in enclosed fixture rated for this product.
  - Avoid direct water/liquid contact.

### NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).