



LED Glass HID lamps

34GC/LED/840 EX39 BB 6/1

Philips Glass HID lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. Thanks to our High-Power LED filament technology, this new generation of indoor/outdoor glass lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant savings with a low initial investment. They are designed to have the same aesthetics, lamp size and light distribution as the HID lamps they are replacing, so the upgrade to LED is easier than ever!


Product data

General Information	
Cap-Base	EX39 [Exclusionary Mogul Screw]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	6,000 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	176 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Input Frequency	50 to 60 Hz

Power Consumption	34 W
Lamp Current (Max)	352 A
Lamp Current (Nom)	120 277 mA A
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
UL Type	HIB_UL Type B (UL Listed+Classified)
Temperature	
T-Case Maximum (Nom)	133 °F
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	ED28
Net Weight (Piece)	0.43 lb


LED Glass HID lamps

Photometric data

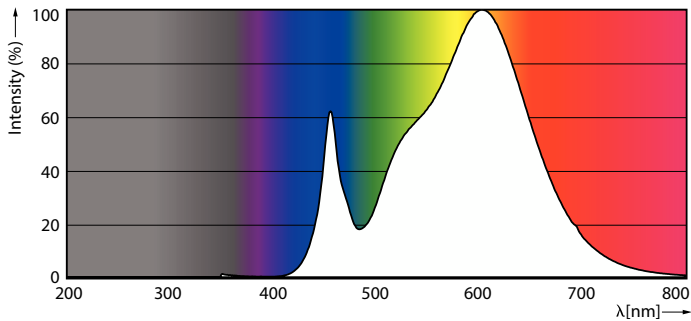


Spectral Power Distribution Colour - 34GC/LED/840 EX39 BB 6/1

Lifetime

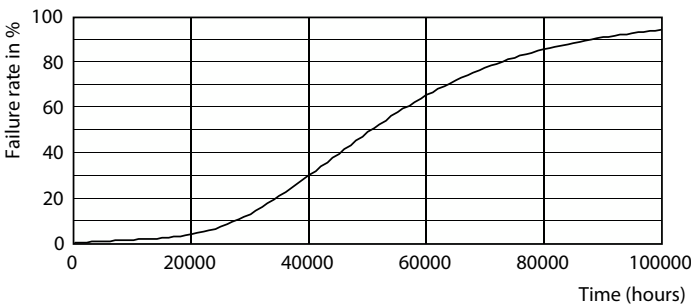

Life Expectancy Diagram

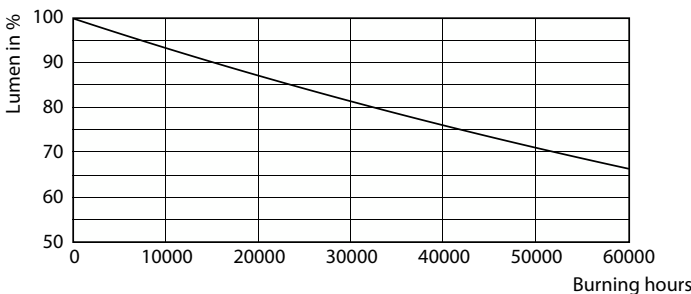

Lumen Maintenance Diagram - 34GC/LED/840 EX39 BB 6/1

