


INCANDESCENT LAMPS

General Service

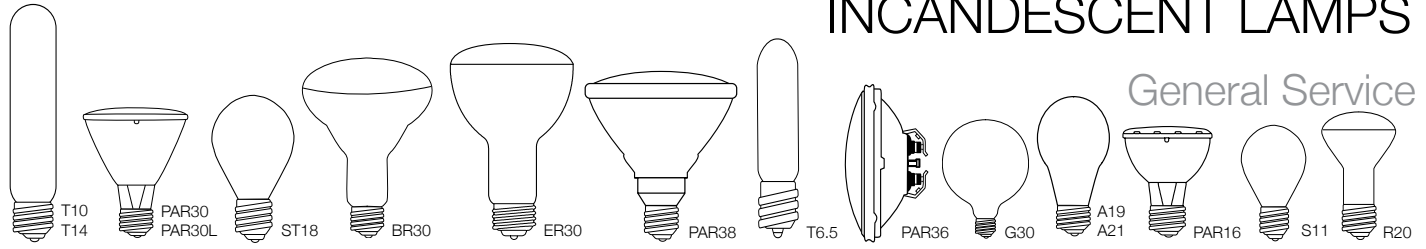

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
40 WATT continued												
T6.5	Int.	106111		T6.5CL40INT	Clear	25/500	130	350	2500	C-8	5.50"	-
T10	Med.	9014		T10CL40	Clear	25/200	130	280	2500	C-5V	5.00"	-
		9015		T10FR40	Frost	25/200	130	280	2500	C-5V	5.00"	-
		106228		T10CL40/CS	CoverShield®	25/200	130	-	-	C-5V	5.00"	-
G30	Med.	20004		G30ANT40	Antique Oil-Rubbed finish	50	120	140	3000	Squirrel Cage	5.13"	-
G40	Med.	20005		G40ANT40	Antique Oil-Rubbed finish	12	120	140	3000	Squirrel Cage	6.75"	-
S11	Int.	9050		S11N40	Clear High-Intensity	25/500	130	370	1500	CC-2V	2.48"	-
ST18	Med.	20006		ST18ANT40	Antique Oil-Rubbed finish	10/100	120	135	3000	Squirrel Cage	5.16"	-
T14	Med.	20007		T14ANT40	Antique Oil-Rubbed finish	10/100	120	135	3000	Squirrel Cage	4.25"	-
43 WATT												
A19	Med.	76006	ⓔ \$	A19CL43/H	Clear	12/120	120	750	1000	CC-8	4.25"	-
		76004	ⓔ \$	A19SW43/H	Soft White	12/120	120	750	1000	CC-8	4.25"	-
45 WATT												
PAR16	Med.	107502	N, \$,18	HP16NFL45	Narrow Flood Prism®	15	130	500	3000	CC-2V	3.07"	30°
R20	Med.	10100	6	R20FL45	Flood	10/100	130	450	3000	C-9	3.93"	-
50 WATT												
A19	Med.	101160	10	A19FR50/12V	Frost	12/240	12	580	1500	C-6	4.25"	-
		101123		A19RS50	Rough Service	20/120	130	580	2500	C-9	4.25"	-
BR30	Med.	104058	6	BR30FL50	Flood	24	130	300	5000	C-9	5.37"	-
ER30	Med.	9113	5,7	ER30FL50/P5	Flood Prism® Long Life Plus™	12/60	130	360	5000	C-9M	6.25"	-
PAR36	Screw Term.	107782	17	HP36NSP50/HX	Narrow Spot HaloXen®	1/12	12	910	5000	C-6	2.75"	12°
		107784	17	HP36VNSP50/HX	Very Narrow Spot HaloXen®	1/12	12	910	5000	C-6	2.75"	5°
		107786	17	HP36WFL50/HX	Wide Flood HaloXen®	1/12	12	910	5000	C-6	2.75"	32°
		65210	10	PAR36WFL50	Wide Flood	1/12	12	330	2000	C-6	2.75"	39x27
PAR38	Med.	70350	ⓔ †,17	HP38FL50/S/HX	Silver PAR Flood HaloXen®	1/15	120	920	1500	CC-8	5.31"	30°
R20	Med.	104200	6	R20AMB50	Amber	10/100	130	-	2500	C-9	3.93"	-
		9146	6	R20BLU50	Blue	10/100	130	-	2500	C-9	3.93"	-
		9150	6	R20DPNK50	Dawn Pink	10/100	130	-	2500	C-9	3.93"	-
		9141	6	R20GRN50	Green	10/100	130	-	2500	C-9	3.93"	-
		9108	6	R20PNK50	Pink	10/100	130	-	2500	C-9	3.93"	-
		9142	6	R20RED50	Red	10/100	130	-	2500	C-9	3.93"	-
		104016	6	R20FL50/CS	CoverShield®	10/100	130	-	2000	C-9	3.93"	-

ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.