

**Presented By:** Candela Corporation  
**Contact Phone:** (800) 922-9226  
**Contact E-mail:** sales@candelacorp.com



**Customer Name:**  
**Project Name:**  
**Fixture Type:**



GE  
Lighting

**24859 - 4580**

GE PAR46 - Aircraft

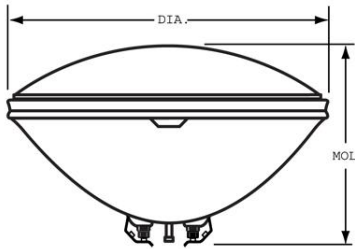

#### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR46
Base	Screw Terminals
Filament	CC-8
Wattage	450
Voltage	28
Rated Life	10 hrs
Primary Application	Aircraft

#### PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	13.0 - 10.0 °
Beam Spread - Vertical	14.0 - 10.0 °
Max. Beam Candlepower (MBCP)	400000

#### DIMENSIONS

Maximum Overall Length (MOL)	3.7500 in(95.2 mm)
Bulb Diameter (DIA)	5.750 in(146.0 mm)
Bulb Diameter (DIA) (MAX)	5.750 in(146.0 mm)

#### PRODUCT INFORMATION

Product Code	24859
Description	4580
ANSI Code	4580
Standard Package	Case
Standard Package GTIN	10043168248591
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168248594

#### CAUTIONS & WARNINGS

##### Warning

- Unexpected lamp rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Avoid contact with glass during operation.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in fixture rated for this product.