

PL H 5.5W BYP E26 TITANIUM LED SERIES



PL:EDGE
SERIES

5.5W REPLACES




13W
CFL

60% Energy Savings

PRO




- ⌚ **Built-in universal voltage driver - Bypass installation**
- ⌚ **Compatible with E26 bases**
- ⌚ **Exceptional efficacy 102 LPW**
- ⌚ **Lasts 4 times longer than CFL**
- ⌚ **Compact form factor fits most fixtures**
- ⌚ **Available in 3000K, 3500K & 4000K**
- ⌚ **Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)**
Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)




PL PRODUCT FEATURES

BYPass Installation

This PL H lamp requires bypassing the ballast during installation and runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

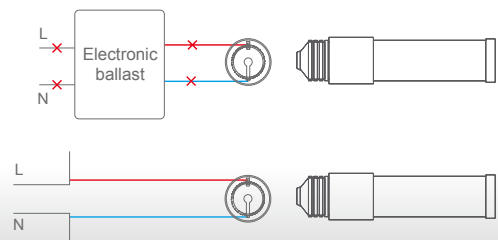

Adjustable Base

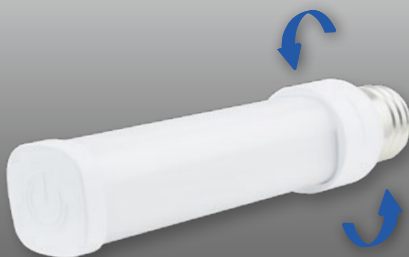


This PL H lamp features a base that can be rotated 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.


PL H 5.5W BYP E26 TITANIUM LED SERIES

APPLICATIONS


Retail

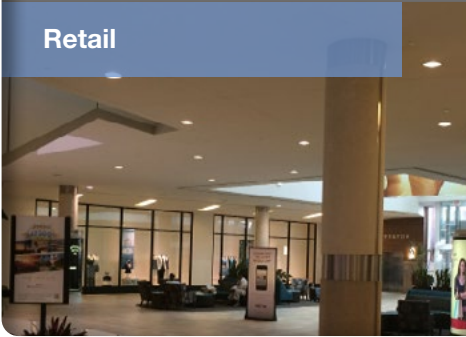

Hospitality

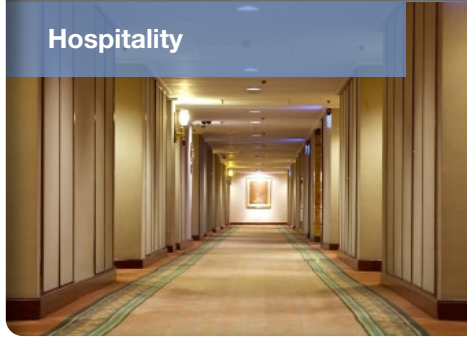

Office

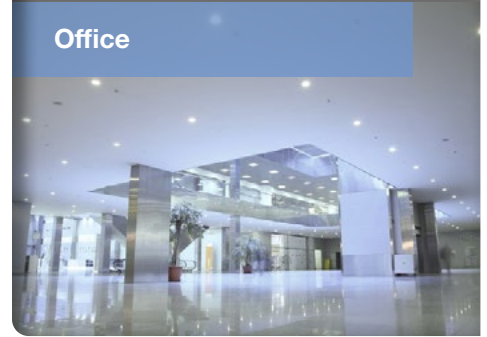

- Base:** E26
- Voltage:** 120-277V
- Dimmable:** No
- PF:** 0.9
- Lifetime:** 50,000 hrs
- Weight:** 0.15lb / 68g
- Min. compartment dimensions:** 6-1/8" (DIA)x 4-3/4"(H)



SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
5.5PLH/830/BYP/E26	98393	5.5	Warm White 3000K	82	550	100	110°
5.5PLH/835/BYP/E26	98394	5.5	Neutral White 3500K	82	550	100	110°
5.5PLH/840/BYP/E26	98395	5.5	Cool White 4000K	82	560	102	110°

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website