

PL H 5.5W BYP GU24 TITANIUM LED SERIES



5.5W REPLACES



**13W
CFL**

60% Energy Savings

PRO




- ⌚ **Built-in universal voltage driver - Bypass installation**
- ⌚ **Compatible with GU24 bases**
- ⌚ **Exceptional efficacy 102 LPW**
- ⌚ **Lasts 4 times longer than CFL**
- ⌚ **Compact form factor fits most fixtures**
- ⌚ **Available in 3000K, 3500K & 4000K**



50,000 H



UNIVERSAL



EFFICACY



WARRANTY



CRI (Ra)




SEMI DIRECTIONAL




PL PRODUCT FEATURES

BYPass Installation

This PL H lamp requires bypassing the ballast during installation and runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

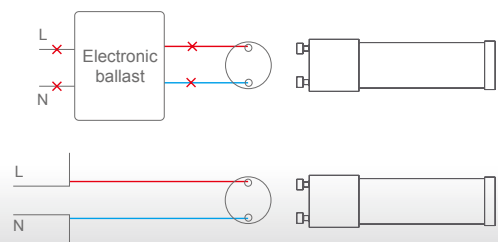

Adjustable Base

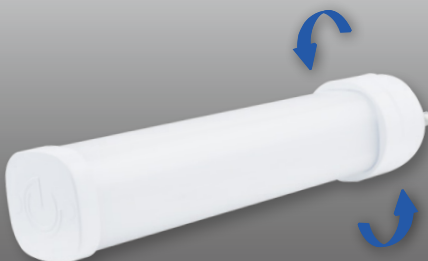


This PL H lamp features a base that can be rotated 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

PL H 5.5W BYP GU24 TITANIUM LED SERIES




APPLICATIONS


Retail

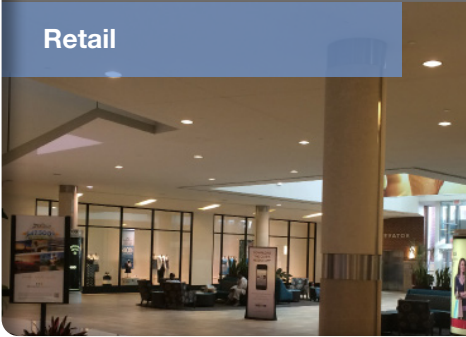


Hospitality

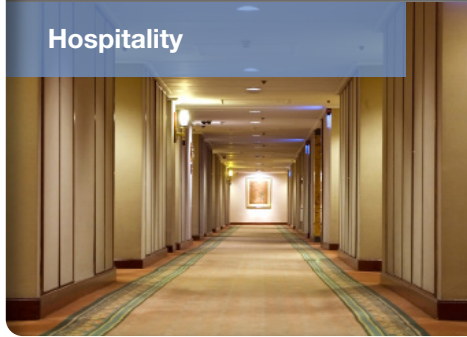

Office

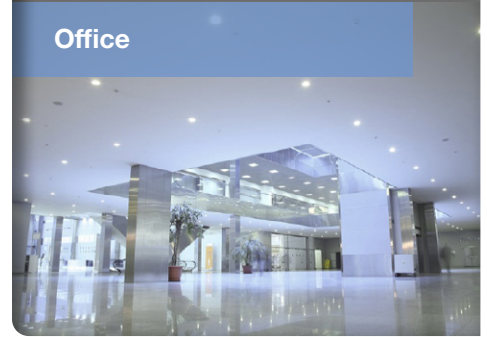

Base: GU24
Voltage: 120-277V
Dimmable: No
PF: 0.9
Lifetime: 50,000 hrs
Weight: 0.15lb / 68g

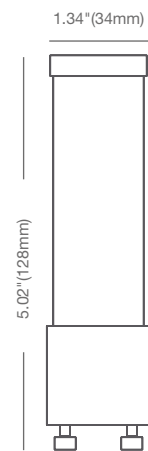

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
5.5PLH/830/BYP/GU24	98396	5.5	Warm White 3000K	82	550	100	110°
5.5PLH/835/BYP/GU24	98397	5.5	Neutral White 3500K	82	550	100	110°
5.5PLH/840/BYP/GU24	98398	5.5	Cool White 4000K	82	560	102	110°

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website

Ref.#: DS352-PLH-5.5W-BYP-GU24-300918