


PL BYP / HYBM LINE




- **HYBRID installation - DIRECT or BYPass**
- **Compatible with magnetic ballasts - DIRECT installation**
- **Built-in universal voltage driver - BYPass installation**
- **Patented design**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
98385	5.5PLV/835/HYBM	3500K	600	82	109	No	13-18W	120°	50,000	120-277V	No
98386	5.5PLV/840/HYBM	4000K	620	82	113	No	13-18W	120°	50,000	120-277V	No
98387	8.5PLV/827/HYBM	2700K	950	82	112	No	26W	120°	50,000	120-277V	No
98388	8.5PLV/830/HYBM	3000K	1,000	82	118	No	26W	120°	50,000	120-277V	No
98389	8.5PLV/835/HYBM	3500K	1,000	82	118	No	26W	120°	50,000	120-277V	No
98390	8.5PLV/840/HYBM	4000K	1,020	82	120	No	26W	120°	50,000	120-277V	No
98256	16.5PLV/830/BYP	3000K	1,800	82	109	No	42W	120°	50,000	120-277V	No
98257	16.5PLV/835/BYP	3500K	1,850	82	112	No	42W	120°	50,000	120-277V	No
98258	16.5PLV/840/BYP	4000K	1,900	82	115	No	42W	120°	50,000	120-277V	No

Note: PL V 16.5W BYP operates on line voltage only and is not compatible with magnetic ballasts

PLS BYP LINE

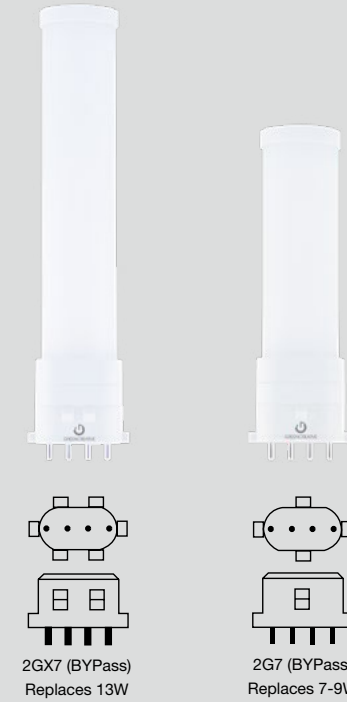

Extra Wide Beam Design - 180° Rotatable Base



- **BYPass installation – Requires bypassing the ballast**
- **Suitable for use in totally enclosed fixtures**
- **180° rotatable base**
- **Compact form factor fits most fixtures**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36631	3.5PLS/835/BYP/2G7/R	3500K	350	82	100	No	7-9W	120°	50,000	120-277V	Yes
36637	5.5PLS/835/BYP/2GX7/R	3500K	600	82	109	No	13W	120°	50,000	120-277V	Yes