

LED Designer Deco

5.5ST19/VIN/950/E26/CL/G/SP D 4/1PF T20


Philips LED Designer Deco lamps allow you to maintain a warm, classic light or a modern, chic effect while providing longer life and energy savings

Product data

General information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000
Light technical	
Color Code	950 [CCT of 5000K]
Beam Angle (Nom)	330 °
Initial lumen (Nom)	500 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Nom)	62 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7

Voltage (Nom)	120 V
Temperature	
T-Ambient (Max)	113 °F
T-Ambient (Min)	-4 °F
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	ST19
Approval and application	
Energy Certifications	Energy Star
Product data	
Order product name	5.5ST19/VIN/950/E26/CL/G/SP D 4/1PF T20
EAN/UPC - Product	046677565817
Order code	565812
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002988803
Net Weight (Piece)	0.097 lb


Dimensional drawing




5.5ST19/VIN/950/E26/CL/G/SP D 4/1PF T20

Product	D	C
5.5ST19/VIN/950/E26/CL/G/SP D 4/1PF T20	2-9/16 in	5-7/16 in

Photometric data




General uniform lighting

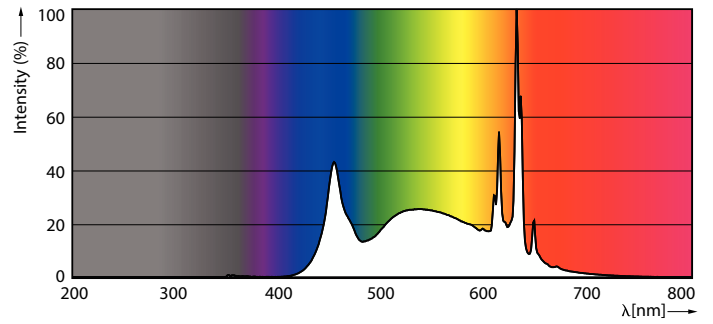

Spectral Power Distribution Colour


General uniform lighting



Light Distribution Diagram

LED Designer Deco

Lifetime

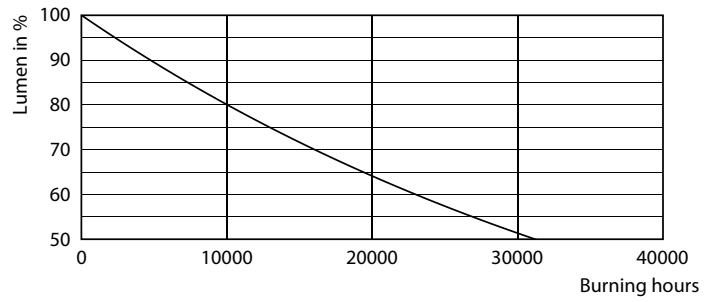

Life Expectancy Diagram

Lumen Maintenance Diagram

