

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com

Customer Name:
Project Name:
Fixture Type:




GE
Lighting

47723 - 65R30FL/STGPQ1/6

GE Indoor Floodlight Saf-T-Gard® BR30 - Shatter-Resistant

- Use original GE's Soft White when you need a light without glare and harsh shadows.
- Replace ordinary light bulbs with GE Flood and Spotlight in all your track and recessed lighting fixtures.

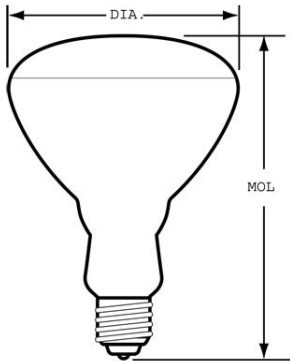

GENERAL CHARACTERISTICS


Lamp Type	Incandescent - Reflector
Bulb	BR30
Base	Medium Screw (E26)
Filament	CC-6
Wattage	65
Voltage	120
Rated Life	2000 hrs
Primary Application	Indoor Floodlight; Shatter-Resistant

DIMENSIONS

Maximum Overall Length (MOL)	5.37 cm
Bulb Diameter (DIA)	3.75 cm
Bulb Diameter (DIA) (MAX)	3.75 cm

PRODUCT INFORMATION

Product Code	47723
Description	65R30FL/STGPQ1/6
Standard Package	BUNDLE
Standard Package GTIN	30043168477230
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168477239

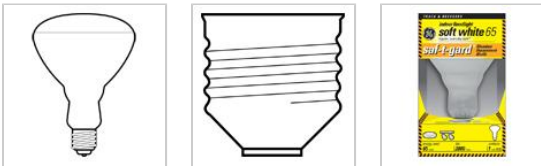

CAUTIONS & WARNINGS

NOTES

- Burning position - base up.
- Will operate in any burning position, but fixed-socket usage other than base up or continuous burning in any position in ambient temperatures above 150 degrees F (66 degrees C), may result in some loss of protective coating. Reflectors and accessories may