


This is the Surge protector required for the P6 conversion

# Acuity Surge Protection Device

## COMPONENT OVERVIEW

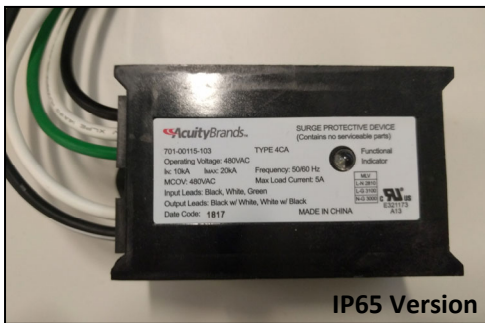

### Model Numbers

120-277V: 701-00115-001

701-00115-101 (IP65 version)

347-480V: 701-00115-003

701-00115-103 (IP65 version)

### ELECTRICAL

Nominal Operating Voltage	120-277 VAC or 347-480 VAC
Line Frequency	50/60 Hz
Load Current	120-277V: 7A Max. 347-480V: 5A Max.
Ambient Temperature	85°C Max.
Fixture Failure Mode	Fixture OFF
Indicator Light	Yes - ON indicates SPD is functional



### STANDARDS

UL Recognized Component in U.S. and Canada (**UL1449**)

UL Categories: **VZCA2/VZCA8** (Surge Protection Devices)

UL File: **E321173** | UL SPD Type: **4CA**

Meets ANSI C136.2 – **Extreme Category (20kV / 10kA)**

Meets ANSI/IEEE C62.41-2002: **Category C High (10kV/10kA)**

Vibration: IEC 60068-2-6

### WIRING DIAGRAM

