




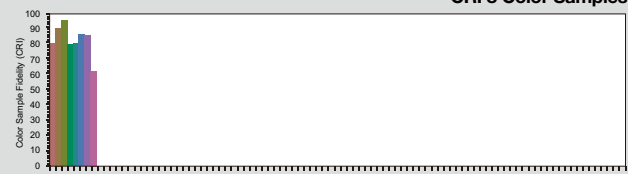

TRUE CHROMA delivers exceptional color rendering of  $R_f \geq 93$  using TM-30 99 color samples vs. CRI 8 color samples

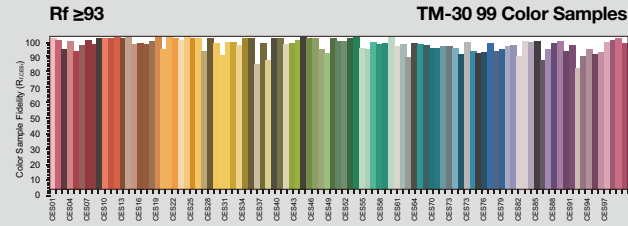

TRUE CHROMA guarantees best in class color consistency of  $SDCM \leq 3$ , tighter than typical industry standards



SDCM  $\leq 3$

- Powered by TRUE CHROMA (CRI  $\geq 95$ ,  $R_f \geq 93$ ,  $R_9 \geq 50$ ,  $SDCM \leq 3$ )
- Proprietary REFINE lens enables powerful light output without glare
- Industry leading five year warranty
- Smooth dimming with most forward and reverse phase dimming controls
- Designed to work with TRUE BEAM accessories

## SPECIFICATIONS


Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	TRUE CHROMA	ES / JA8 / T20
36114	7.5MR16DIM/927SP10/RC	2700K	530	95	71	7,000	Yes	42W	10°	25,000	12V	Yes	✓	✓/✓/✓
36117	7MR16DIM/927SP15/RC	2700K	490	95	70	5,145	Yes	50W	15°	25,000	12V	Yes	✓	✓/✓/✓
36118	7MR16DIM/927NF25/RC	2700K	490	95	70	2,800	Yes	50W	25°	25,000	12V	Yes	✓	✓/✓/✓
36119	7MR16DIM/927FL35/RC	2700K	490	95	70	1,425	Yes	50W	35°	25,000	12V	Yes	✓	✓/✓/✓
36115	7.5MR16DIM/930SP10/RC	3000K	540	95	72	7,200	Yes	42W	10°	25,000	12V	Yes	✓	✓/✓/✓
36120	7MR16DIM/930SP15/RC	3000K	500	95	71	5,250	Yes	50W	15°	25,000	12V	Yes	✓	✓/✓/✓
36121	7MR16DIM/930NF25/RC	3000K	500	95	71	2,900	Yes	50W	25°	25,000	12V	Yes	✓	✓/✓/✓
36122	7MR16DIM/930FL35/RC	3000K	500	95	71	1,450	Yes	50W	35°	25,000	12V	Yes	✓	✓/✓/✓
36116	7.5MR16DIM/940SP10/RC	4000K	550	95	73	7,400	Yes	42W	10°	25,000	12V	Yes	NO	✓/✓/✓
36123	7MR16DIM/940FL35/RC	4000K	510	95	73	1,480	Yes	50W	35°	25,000	12V	Yes	NO	✓/✓/✓
36124	7.5MR16DIM/927SP15/RC	2700K	530	95	71	5,570	Yes	75W	15°	25,000	12V	Yes	✓	✓/✓/✓
36125	7.5MR16DIM/927NF25/RC	2700K	530	95	71	3,000	Yes	75W	25°	25,000	12V	Yes	✓	✓/✓/✓
36126	7.5MR16DIM/927FL35/RC	2700K	530	95	71	1,540	Yes	75W	35°	25,000	12V	Yes	✓	✓/✓/✓
36127	7.5MR16DIM/930SP15/RC	3000K	540	95	72	5,670	Yes	75W	15°	25,000	12V	Yes	✓	✓/✓/✓
36128	7.5MR16DIM/930NF25/RC	3000K	540	95	72	3,100	Yes	75W	25°	25,000	12V	Yes	✓	✓/✓/✓
36129	7.5MR16DIM/930FL35/RC	3000K	540	95	72	1,560	Yes	75W	35°	25,000	12V	Yes	✓	✓/✓/✓
36130	7.5MR16DIM/940FL35/RC	4000K	550	95	73	1,595	Yes	75W	35°	25,000	12V	Yes	NO	✓/✓/✓
35767	7.5MR16DIM/927SP10/R	2700K	530	95	71	7,000	Yes	42W	10°	25,000	12V	Yes	✓	✓/✓/✓
35550	7MR16DIM/927SP15/R	2700K	490	95	70	5,145	Yes	50W	15°	25,000	12V	Yes	✓	✓/✓/✓
35551	7MR16DIM/927NF25/R	2700K	490	95	70	2,800	Yes	50W	25°	25,000	12V	Yes	✓	✓/✓/✓
35552	7MR16DIM/930SP15/R	2700K	490	95	70	1,425	Yes	50W	35°	25,000	12V	Yes	✓	✓/✓/✓
35768	7.5MR16DIM/930SP10/R	3000K	540	95	72	7,200	Yes	42W	10°	25,000	12V	Yes	✓	✓/✓/✓
35553	7MR16DIM/930SP15/R	3000K	500	95	71	5,250	Yes	50W	15°	25,000	12V	Yes	✓	✓/✓/✓
35555	7MR16DIM/930FL35/R	3000K	500	95	71	1,450	Yes	50W	35°	25,000	12V	Yes	✓	✓/✓/✓
35769	7.5MR16DIM/940SP10/R	4000K	550	95	73	7,400	Yes	42W	10°	25,000	12V	Yes	NO	✓/✓/✓
35536	7.5MR16DIM/927SP15/R	2700K	530	95	71	5,570	Yes	75W	15°	25,000	12V	Yes	✓	✓/✓/✓
35538	7.5MR16DIM/927FL35/R	2700K	530	95	71	1,540	Yes	75W	35°	25,000	12V	Yes	✓	✓/✓/✓
35539	7.5MR16DIM/930SP15/R	3000K	540	95	72	5,670	Yes	75W	15°	25,000	12V	Yes	✓	✓/✓/✓
35540	7.5MR16DIM/930NF25/R	3000K	540	95	72	3,100	Yes	75W	25°	25,000	12V	Yes	✓	✓/✓/✓
35541	7.5MR16DIM/930FL35/R	3000K	540	95	72	1,560	Yes	75W	35°	25,000	12V	Yes	✓	✓/✓/✓
35558	5GU10DIM/927NF25	2700K	380	95	76	1,900	Yes	50W	25°	25,000	120V	Yes	✓	✓/✓/✓
35559	5GU10DIM/927FL35	2700K	380	95	76	1,105	Yes	50W	35°	25,000	120V	Yes	✓	✓/✓/✓
35561	5GU10DIM/930NF25	3000K	390	95	78	1,950	Yes	50W	25°	25,000	120V	Yes	✓	✓/✓/✓
35562	5GU10DIM/930FL35	3000K	390	95	78	1,135	Yes	50W	35°	25,000	120V	Yes	✓	✓/✓/✓
35563	5GU10DIM/940FL35	4000K	400	95	80	1,160	Yes	50W	35°	25,000	120V	Yes	NO	✓/✓/✓

REFINE MR lamps are designed to work with GREEN CREATIVE's TRUE BEAM accessories which enable professionals to precisely realize any lighting design that can be imagined.




### LINEAR DISTRIBUTION LENS

Provides an elliptical linear shaped light distribution.




Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle Horiz. x Vert.
35815	MR/ACC/LN1225	80%	35%	12° x 25°
35816	MR/ACC/LN1236	80%	23%	12° x 36°
35817	MR/ACC/LN1260	80%	16%	12° x 60°

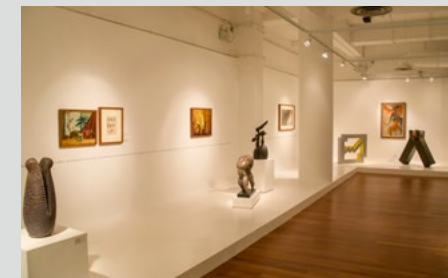

### WIDE DISTRIBUTION LENS

Maximizes wide distribution illumination for general lighting applications.

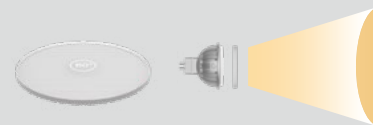

Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35820	MR/ACC/RD060	78%	6%	60°



### SQUARE LENS

Provides a square shaped light distribution.



Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35818	MR/ACC/SQ2525	80%	19%	25°
35819	MR/ACC/SQ3636	80%	11%	36°



### SHIFT LENS

Adjust the feel of any space by adding CCT lens options.



Product	Model	Lumen Transmissivity	CCT Shift Effect
35809	MR/ACC/CCT22	76%	2700K to 2200K
35810	MR/ACC/CCT24	82%	2700K to 2400K



### WALL WASH LENS

Bends the beam from 0° to 20° maximum deflection angle while maintaining uniform and consistent color and shape.




Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Max. Deflection
35821	MR/ACC/WW10D	80%	63%	10°
35822	MR/ACC/WW20D	80%	60%	20°



### HONEYCOMB LOUVER

Reduces glare and softens beam patterns.



Product	Model	Cutoff Angle	CBCP of 10° Lamp
35808	MR/ACC/HC	40°	66%

