

Switch-Hitter™

Constant Current LED Driver

Model Number AC-60CD1.05UVTS AC60CD1.05ATBCV


Input Voltage: 120-277V
Input Frequency: 50/60Hz
Side and Bottom Mount/Leads Options

MULTI-CURRENT SWITCHING AND DIMMING

ELECTRICAL SPECIFICATIONS:

Output Power Max.	Input Power	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Minimum Starting Temp.	Efficiency Up To	Dimming Protocol	Dimming Range
60W	72W @ 120V 71W @ 277V	0.6A @ 120V 0.26A @ 277V	>0.95	<20%	37-57V	1050mA±5%	90° C	-40° C	84%	0 to 10V	10 to 100%
40W	49W @ 120V 48W @ 277V	0.41A @ 120V 0.18A @ 277V	>0.95	<20%	37-57V	700mA±5%	90° C	-40° C	83%	0 to 10V	10 to 100%
29W	35W @ 120V 34W @ 277V	0.3A @ 120V 0.13A @ 277V	>0.95	<20%	37-57V	500mA±5%	90° C	-40° C	83%	0 to 10V	10 to 100%

WIRING:

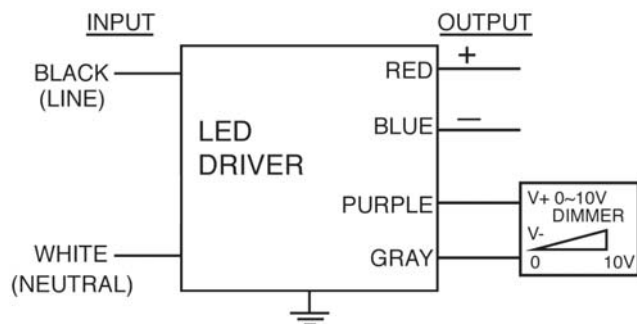

Lead Lengths

Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

PHYSICAL:



Bottom Mount Option
Model Number:
AC60CD1.05ATBCV

Dimensions

Length	9.5"
Width	1.7"
Height	1.14"
Mounting Length	8.9"
Weight	1.33 lbs.
Case Qty.	30 pcs.

SAFETY & PERFORMANCE:

- UL US Class 2
- cUL LVLE
- UL Outdoor Type I
- Class A sound rating
- No PCBs
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded

