

AFLEX™ LINEAR

Specification Sheet

Constant Current Electronic 0-10V Dimmable Programmable LED Driver

The **AFLEX™ LINEAR** platform offers the unparalleled ability to program the driver's power in addition to the output current, dimming curve, dim-to-off functionality, NTC settings and more; all while maintaining high efficiency over the programmable range. This unique technological advancement enables both ultimate design flexibility and significant SKU elimination. Programming the driver does not require any power and can be done in less than one second. The available auxiliary output provides a power source for sensors and/or cooling devices, eliminating the need for an additional power supply. The **AFLEX™ LINEAR** driver is dimmable down to 0.1% with a 0-10V dimmer. Unequaled flexibility and performance, along with Class P approval and Title 24 compliance, makes the **AFLEX™ LINEAR** driver the perfect choice for commercial lighting fixture application. Title 24 compliance is dependent on dimmer luminaire combination.



- Installation:** Terminal blocks with side feed
Driver Type: Class 2 Single Channel
Dimming: 0-10V dimmable down to 0.1% with dim-to-off capability
Input Voltage: Universal 120VAC to 277VAC, 50/60Hz
Output Voltage: 10 - 57VDC
Output Current: 100 - 2000mA (1mA Step Programmable)
Environmental: Dry
IP Rating: IP40
Listing: UL Listed, Class P, Class 2
Certifications: UL8750 | CSA C22.2 No. 250.13-17
Warranty: 5-Year

MEETS
TITLE 24/JA8
REQUIREMENTS



The AFLEX™ Linear driver is also available in:

- AFLEX™ Compact
- JB Series

Please refer to Magnitudeinc.com for more information.

Ordering Guide

TYPE	MAX POWER		OUTPUT CURRENT		CASE STYLE	DIMMING CURVE		AUX POWER OPTION
	30 to 100W	30 to 100W Programmable	100 to 2000mA		Enclosure Type	L Linear (Std.)		12V PS and 57V Output (Standard)
 AFLEX LINEAR PROGRAMMABLE Pre-programmed per Chosen Specification	30W	30W	100 to 1650	100 to 1650mA	L ¹ Linear	G Logarithmic	E ¹	12V PS and 57V Output
	40W	40W		(10 to 57VDC)		L ¹ Linear	F	24V PS and 57V Output
	50W	50W	100 to 2000	100 to 2000mA			G	No PS and 57V Output
	60W	60W		(10 to 50VDC)			B	12V PS and 50V Output
	75W	75W					C	24V PS and 50V Output
	100W	100W					D	No PS and 50V Output

¹ = Default Setting

Driver Dimensions

Length	12.00"	304.80mm
Width	1.20"	30.48mm
Height	1.00"	25.40mm

Wireless Programmable Features

- ♦ Programmable Power – 30 to 100W
- ♦ Output Current (1mA Step Programmable)
- ♦ Dimming Curve (Linear / Logarithmic)
- ♦ Dim-to-Off (On / Off)
- ♦ NTC Settings

Programming requires Flextool wireless programmer.



SPECIFICATIONS

— 1650mA Max Version —

INPUT

Input Voltage Range 120 to 277VAC ± 10%

Input Frequency 50/60Hz

Input Current 0.8A @ 120VAC
0.4A @ 277VAC*

Inrush Current 38A Max

Efficiency > 88%*

Power Factor 0.99 @ 120VAC
0.97 @ 277VAC
(Refer to graph on page 6)

OUTPUT

Output Voltage Range 10 to 57VDC*

Output Current Range 100 to 1650mA*
(1mA Step Programmable)

Output Current Tolerance < 5%

Output Current Ripple < 5% @ Max load

Line Regulation +/- 5%

Load Regulation +/- 5%

Turn-On Delay Time 0.4 sec @ Max load

Sensor Power Supply (Aux) 12 or 24V up to 160mA
(Programmable)*

Stand-By Power > 1W

ENVIRONMENTAL

Env. Protection Rating IP40

Surge Protection 2.5kV

Operating Ambient Temp. -40°C to +60°C

Operating Temperature -40°C to +50°C

Storage Temperature -40°C to +85°C

Expected Lifetime 50k hours at 75°C
(Refer to graph on page 7)

Audible Noise < 24dB Class A

Withstanding Voltage 2.5kV

DIMMING

Dimming Control 0 to 10V

Dimming Input Range -2 to +15V

Dimming Curves Linear/Logarithmic (Programmable)

Min. Dimming Level Dim down to 0.1%

Dim-to-Off Yes (Programmable)

Current Consumption 0.35mA / Source

*Depending on model

LED THERMAL PROTECTION (NTC)

NTC Value 15 kΩ ± 5% @ 25°C

Manufacture: Vishay P/N: NTC0805E3153JMT

Output Level Range 1mA Step Programmable
(0 to 100%)

PROTECTION

Over Current Protection Yes; Current Limiting

Short Circuit Protection Yes; Hiccup Mode

Over Voltage Protection Yes; Hiccup Mode

Over Temp. Protection Yes; Power Derating
(Refer to graph on page 7)

Mis-Wiring Protection Yes; Auto Shutdown

MECHANICAL HOUSING

Length 12.00" (304.8mm)

Mounting Length 11.70" (296.8mm)

Width 1.20" (30.48mm)

Height 1.00" (25.4mm)

Housing Material Aluminum

Housing Color Blue Anodized

Junction Box No

Input Connector Types Black & White
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Output Connector Types Red & Blue
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Dimming Connector Types Purple & Gray
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Auxiliary Connector Types Yellow & Gray
Wago 253, Dual Side
16 to 20AWG strip 3/8"

NTC Connector Types Orange & Orange
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Mounting 2 half-hole flange mounts

APPROVAL MARKINGS

Certificates / Approval Signs UL 8750, Class 2, Class P

SPECIFICATIONS

— 2000mA Max Version —

INPUT

Input Voltage Range 120 to 277VAC $\pm$ 10%

Input Frequency 50/60Hz

Input Current 0.8A @ 120VAC
0.4A @ 277VAC*

Inrush Current 38A Max

Efficiency > 88%*

Power Factor 0.99 @ 120VAC
0.97 @ 277VAC
(Refer to graph on page 6)

OUTPUT

Output Voltage Range 10 to 50VDC*

Output Current Range 100 to 2000mA*
(1mA Step Programmable)

Output Current Tolerance < 5%

Output Current Ripple < 5% @ Max load

Line Regulation $\pm$ 5%

Load Regulation $\pm$ 5%

Turn-On Delay Time 0.4 sec @ Max load

Sensor Power Supply (Aux) 12 or 24V up to 160mA
(Programmable)*

Stand-By Power > 1W

ENVIRONMENTAL

Env. Protection Rating IP40

Surge Protection 2.5kV

Operating Ambient Temp. -40°C to +60°C

Operating Temperature -40°C to +75°C

Storage Temperature -40°C to +85°C

Expected Lifetime 50k hours at 75°C
(Refer to graph on page 7)

Audible Noise < 24dB Class A

Withstanding Voltage 2.5kV

DIMMING

Dimming Control 0 to 10V

Dimming Input Range -2 to +15V

Dimming Curves Linear/Logarithmic (Programmable)

Min. Dimming Level Dim down to 0.1%

Dim-to-Off Yes (Programmable)

Current Consumption 0.35mA / Source

*Depending on model

LED THERMAL PROTECTION (NTC)

NTC Value 15 k Ω $\pm$ 5% @ 25°C

Manufacture: Vishay P/N: NTC0805E3153JMT

Output Level Range 1mA Step Programmable
(0 to 100%)

PROTECTION

Over Current Protection Yes; Current Limiting

Short Circuit Protection Yes; Hiccup Mode

Over Voltage Protection Yes; Hiccup Mode

Over Temp. Protection Yes; Power Derating
(Refer to graph on page 7)

Mis-Wiring Protection Yes; Auto Shutdown

MECHANICAL HOUSING

Length 12.00" (304.8mm)

Mounting Length 11.70" (296.8mm)

Width 1.20" (30.48mm)

Height 1.00" (25.4mm)

Housing Material Aluminum

Housing Color Blue Anodized

Junction Box No

Input Connector Types Black & White
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Output Connector Types Red & Blue
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Dimming Connector Types Purple & Gray
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Auxiliary Connector Types Yellow & Gray
Wago 253, Dual Side
16 to 20AWG strip 3/8"


NTC Connector Types Orange & Orange
Wago 253, Dual Side
16 to 20AWG strip 3/8"

Mounting 2 half-hole flange mounts

APPROVAL MARKINGS

Certificates / Approval Signs UL 8750, Class 2, Class P



MECHANICAL DIAGRAMS





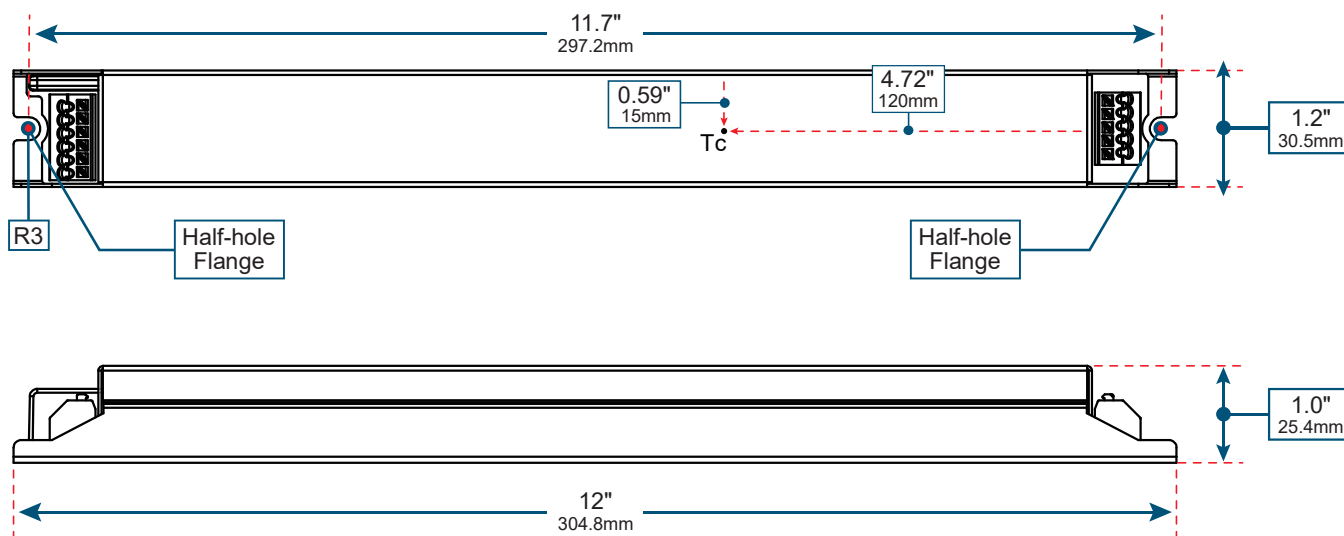


OPERATING POWER OUTPUT


— 1650mA Maximum Current —

— 2000mA Maximum Current —

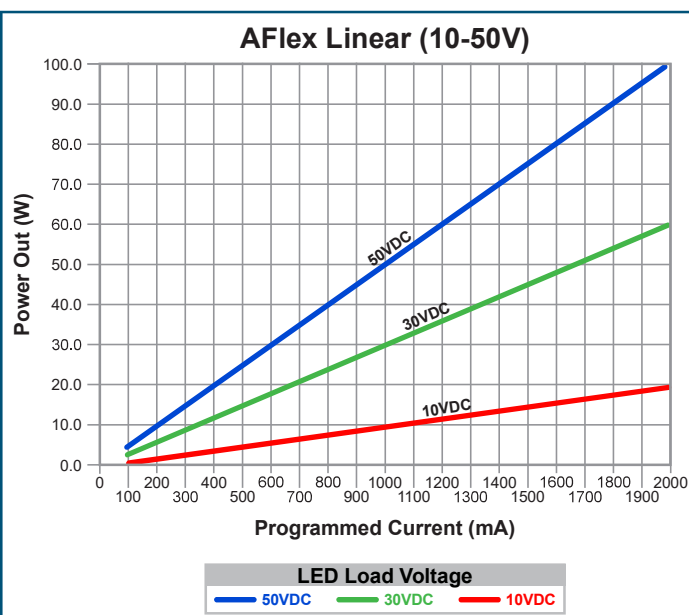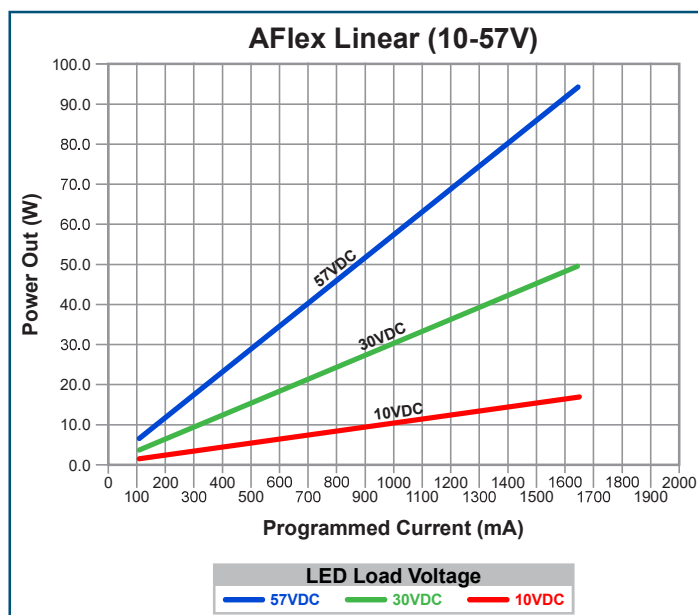

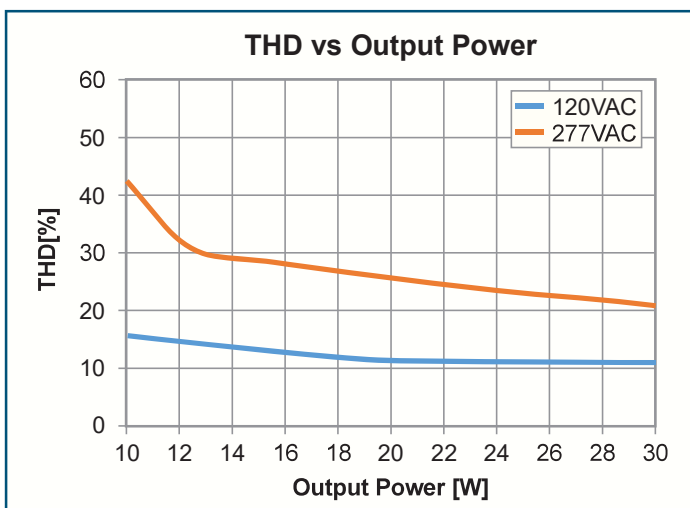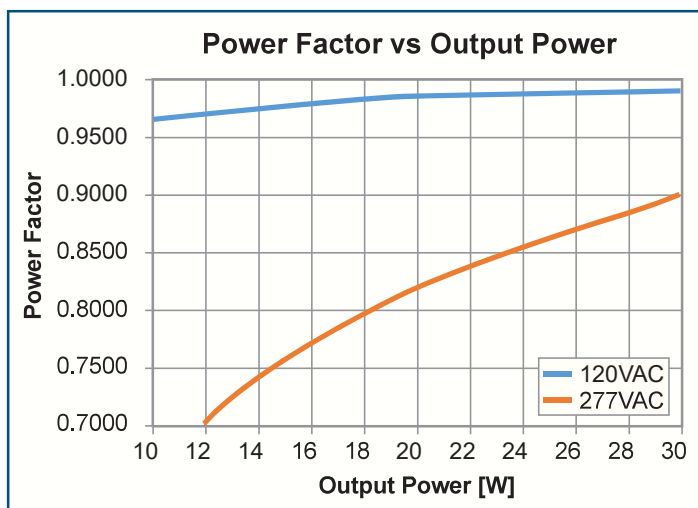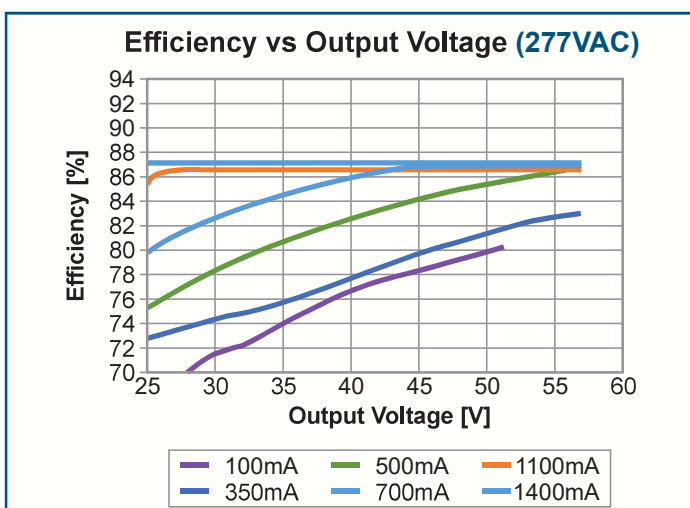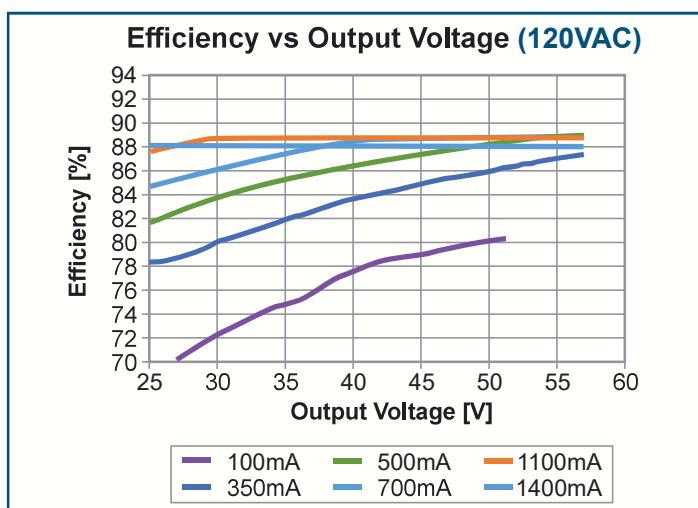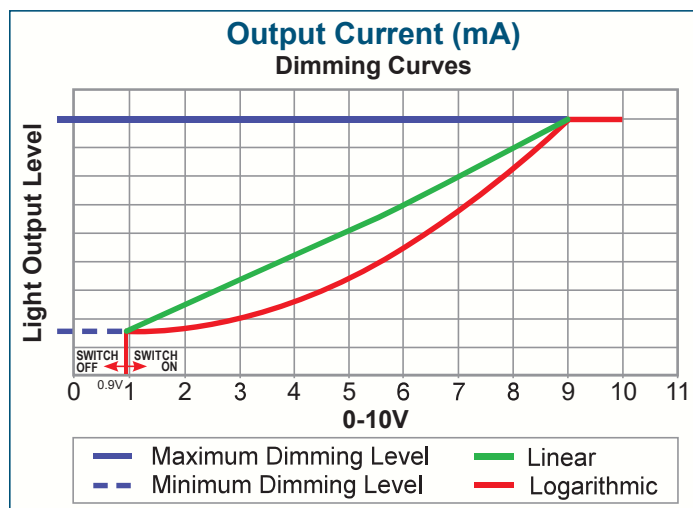


The IEEE P1789 Flicker Test Performance Results

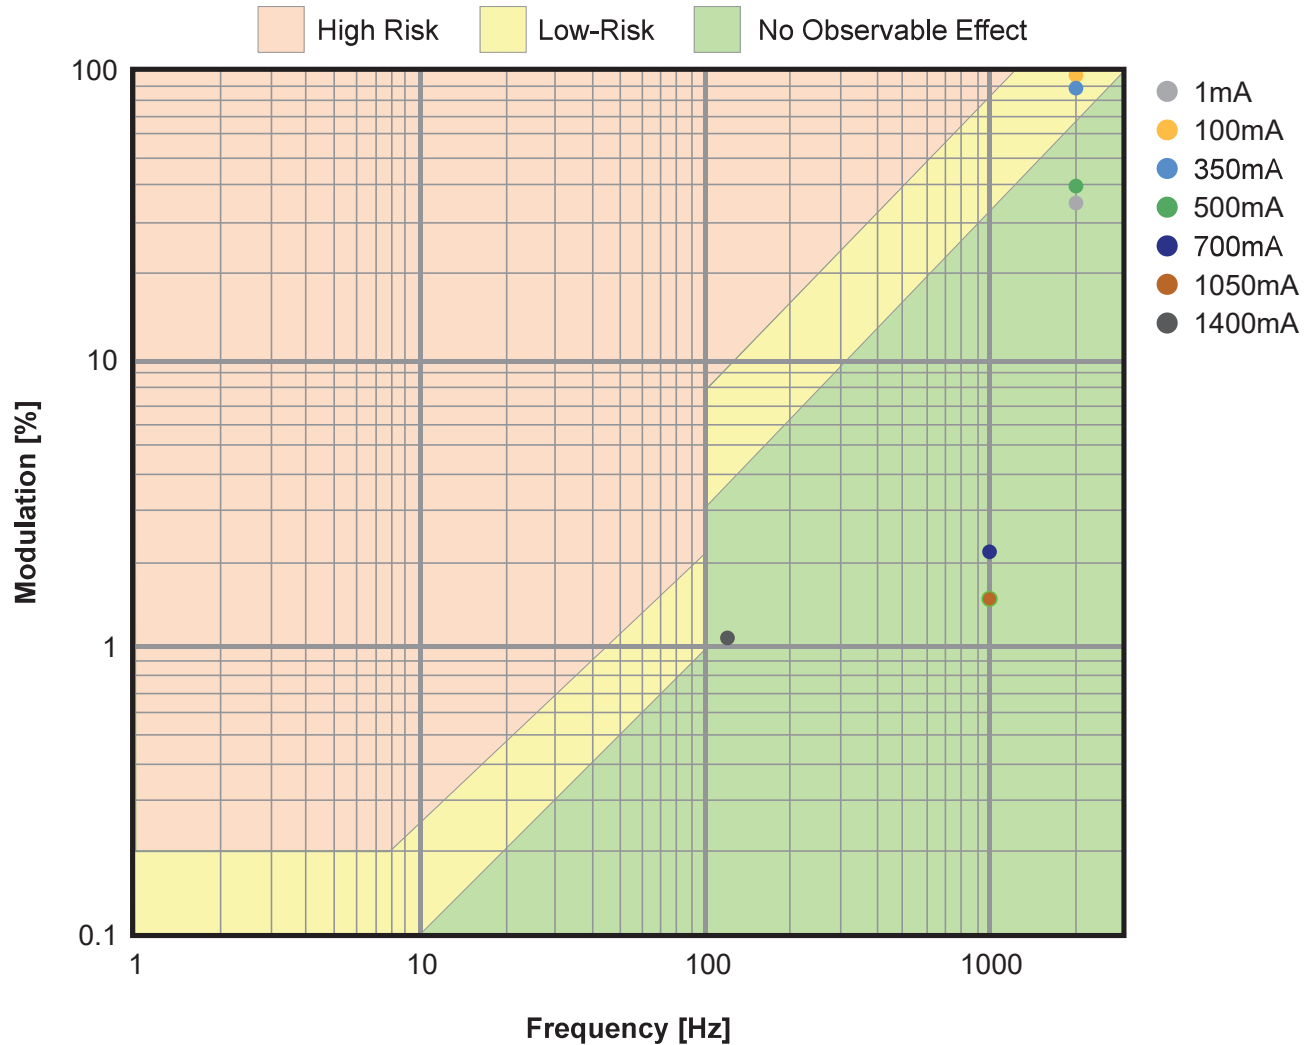

LED Thermal Protection (NTC)


AFLEX™ series drivers help protect the LED's lifetime and will reduce LED temperature by derating the output current in case of high temperatures. The negative temperature coefficient (NTC) thermistor must be connected to the LED driver, as shown in the wiring diagram.

For maximum performance, the NTC thermistor must be placed close to the Tc point of the LED module. The power derating parameters can be programmed using the FlexTool programmer. The NTC outputs can be left disconnected if thermal protection is not required.


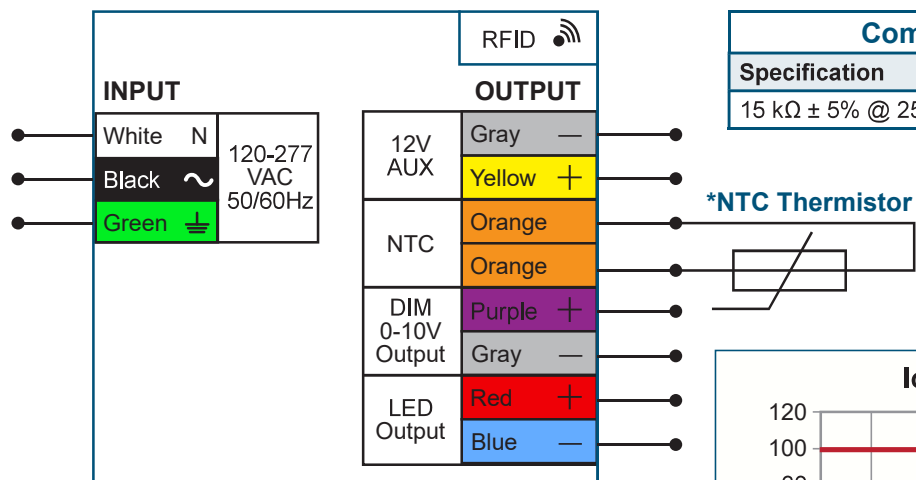


Compatible NTC Thermistor*

Specification	Manufacturer	Manufacturer P/N
15 kΩ ± 5% @ 25°C	Vishay	NTCS0805E3153JMT

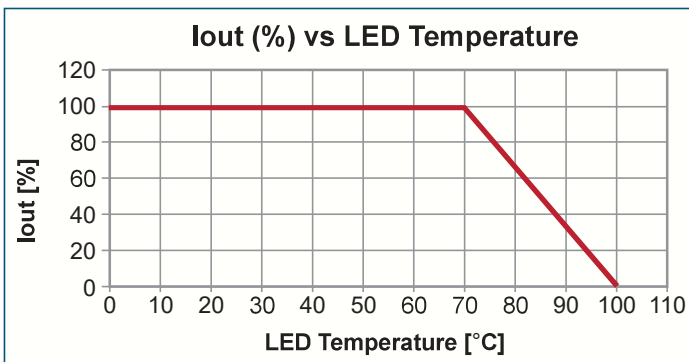

Driver Thermal Protection

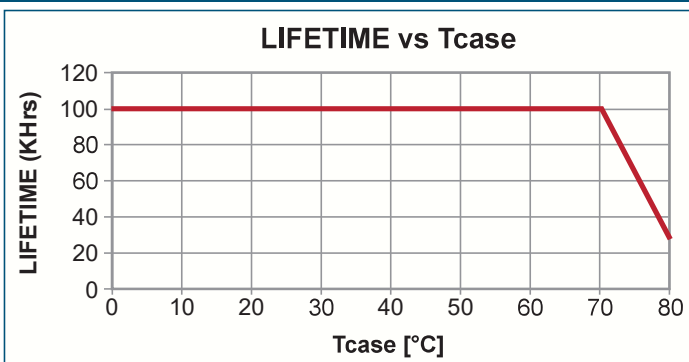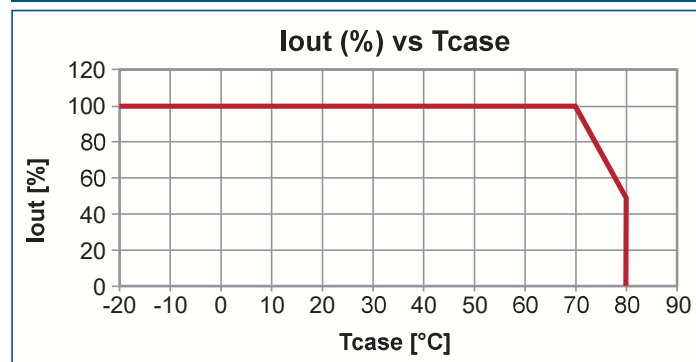

5% LED Drop Allowed

AWG	100-700mA	700-1650mA	1500-2000mA
18	17 ft	7 ft	6 ft
16	27 ft	12 ft	9 ft
14	42 ft	19 ft	15 ft
12	67 ft	36 ft	24 ft

10% LED Drop Allowed


AWG	100-700mA	700-1650mA	1500-2000mA
18	34 ft	15 ft	12 ft
16	53 ft	23 ft	19 ft
14	85 ft	37 ft	30 ft
12	135 ft	59 ft	47 ft

Temperature Rating

Description	Minimum	Maximum
Normal Operation	-40°C	+70°C
Derating Area	+70°C	+80°C
Protection Area	+80°C	
Resume Operation After Protection Activated	+70°C	


Inrush Current

VIN (V)	IPEAK (A)	T (@ 50% IPEAK)
120VAC	14.2	1.5 usec
277VAC	38.0	1.2 usec

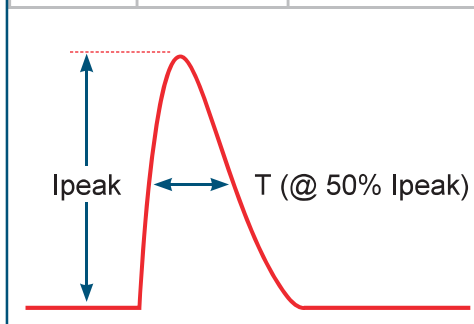

Remote Installation

Output Current vs LED Voltage

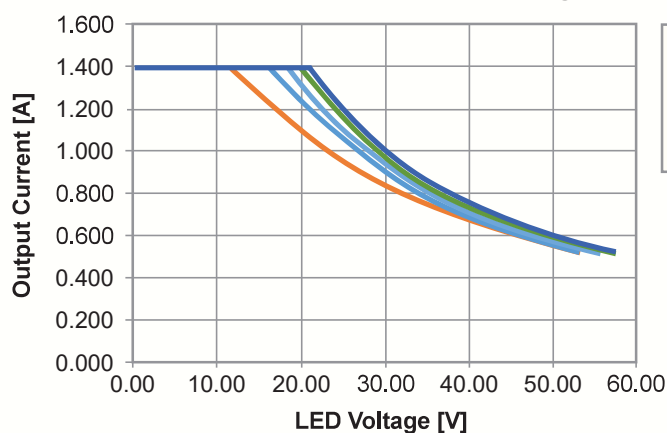

Test Condition

1. Output Power = 40W
2. Output Current = 1.4A
3. Wire Parameters = 18AWG, 16/30, 6.75Ω / 1,000'

Note: Above L = 100 ft min / LED voltage = 10V

Compatible 0-10V Dimmers: Please refer to Magnitudeinc.com for compatibility information.

About the FlexTool Wireless Programmer

The FLEXTOOL Wireless Programmer is used to program Magnitude's Flex Series of LED drivers. By using the FLEXTOOL, OEM's can quickly and smoothly configure the driver's parameters without applying power or wires to the driver.

With the FLEXTOOL software, you can easily save driver configuration profiles externally and use as needed. The software provides graphic and audio indication that the driver was successfully configured. Please see page 8 for programming information.

Programming the AFLEX™ Linear Driver

Programmable Output Current and Power

Current is programmable in 1mA steps. Power is programmable in 1W steps.

Dimming Control

- Dim-to-Off: Check box (yes/no); Factory Default: Checked (yes)
- Dimming Curve: Logarithmic or Linear; Factory Default: Linear
- Dimmer Type: 0-10(V) or None; Factory Default: 0-10(V)
- Minimum Current (dimming level) before Shut-Off (Dim-to-Off); Factory Default: 1mA

LED Thermal Protection

- Temperature Derating Start; Factory Default: 70°C
- Temperature Derating End; Factory Default: 100°C
- Min. Current before Shut-Off; Factory Default: 1mA

