

4

3


1

DWG NO. 1000009 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

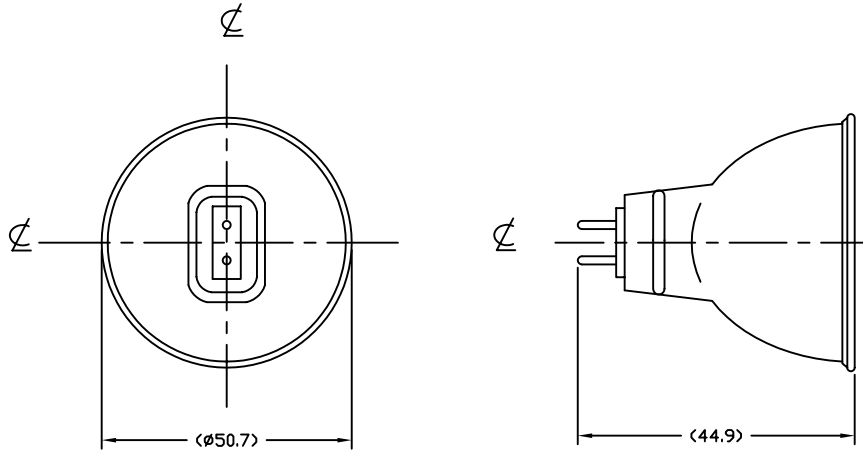

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	20 W
COLOR TEMP	2950 K
AVERAGE LIFE	3500 HRS
BASE TYPE	GU5.3
MAX CP	600 cd
FILAMENT TYPE	C-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	09/07/99	TITLE BAB/C/A JR12V-20W/FL	
		CHKD	D.GILCZYNSKI	09/07/99		
		ENGR				
		MFG				
		QUAL				
MATERIAL		DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.
COMPOSITE				B	BAB	1000009
FINISH		GOVT ACTVY		SCALE	WEIGHT	SHEET
				NONE		1 OF 1

4

3

2

1

CAD