

4

3

DWG NO. 1000062 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

D


D

C

C

B

B

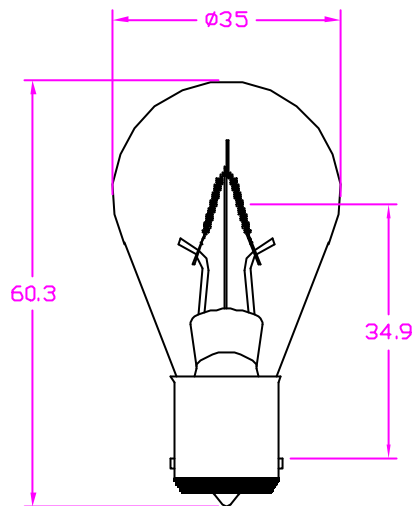

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± — .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	09/19/00	TITLE BLX, INC120V-50W INCANDESCENT LAMP	
		CHKD	D.GILCZYNSKI	09/19/00		
		ENGR				
		MFG				
MATERIAL		QUAL		SIZE	CODE IDENT NO.	DWG NO.
COMPOSITE		DSGN ACTVY		B	BLX	1000062
FINISH		GOVT ACTVY		SCALE	WEIGHT	SHEET
				NONE		1 OF 1

CHARACTERISTICS	
RATED VOLTAGE	120 V
WATTAGE	50 W
COLOR TEMP	2850 K
TOTAL LUMENS	780 Lm
AVERAGE LIFE	50 HRS
BASE TYPE	BA15d
FILAMENT TYPE	CC-2V
BURNING POSITION	BD/Hor

A

A

4

3

2

1

CAD