STARLED®, INC.

T-1¾ BI-PIN SINGLE CHIP DOME & FLAT-TOP LEDs

ORDERING INFORMATION: BP631 (A) WC (B) 2 (C) - 24V/25 (D)

(A) MODEL
BP631
BPF631

(B) LED LENS COLOR
WC = WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH
1 = ULTRA RED (660nm) **OBSOLETE**
2 = STD. RED (630-635nm)
U2 = ULTRA HI EFF, RED (623-630nm)
3 = STD. ORANGE (605-610nm)
U3 = ULTRA ORANGE (612-620nm)
4 = STD. YELLOW (585nm)
*S4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm)
*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
*10NW = ULTRA BLUE (465-475nm)
*12NW = SOFT WHITE (NO nm VALUE)
***MAX. CONTINUOUS CURRENT 10mA.**

MODEL: BP631

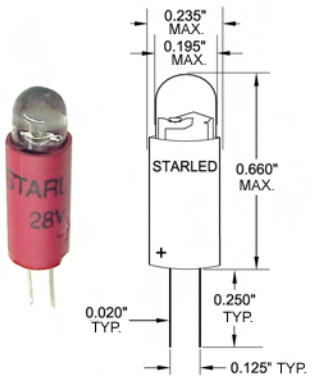

MODEL: BPF631

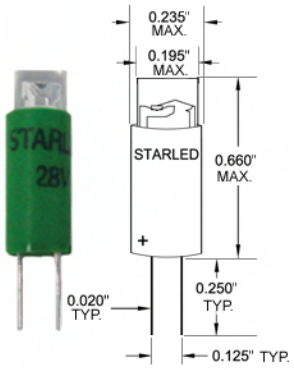

(D) STANDARD DC & AC OPERATING VOLTAGES/mA
5V/25, 12V/25, 24V/25, 28V/25, 36V/12, 48V/12 & 60V/15
APPLICATION MUST BE SPECIFIED WHEN ORDERING:
VAC = ALTERNATING CURRENT VDC(V) = DIRECT CURRENT
NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES.

DIRECT INCANDESCENT LAMP REPLACEMENTS
2314, 2316, 2324, 2335, 2337, 2342, 7001, 7003, 7328, 7330 ETC...

HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

2059 E. DEL AMO BLVD. * RANCHO DOMINGUEZ, CA 90220 * TEL: (310) 603-0403 * FAX: (310) 603-1335