


4

3

DWG NO. 1000092 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

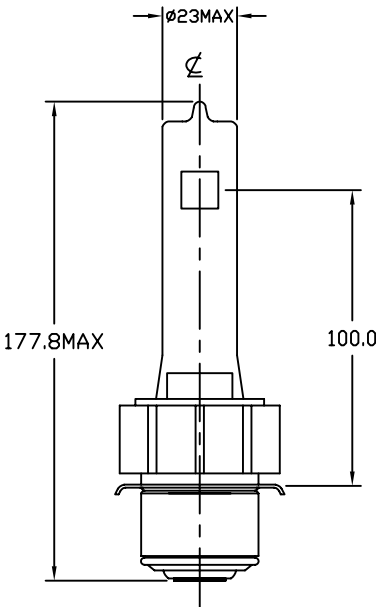

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1000 W
COLOR TEMP.	3200 K
TOTAL LUMEN	27500 Lm
BASE TYPE	P40S
AVERAGE LIFE	200 HRS
FILAMENT TYPE	C-13D
BURN POSITION	Any

APPLICATION	
NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± 3 .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
		APPROVALS				DATE	
		DRAWN	R.AMPARO	08/30/99	TITLE BVV JCS120V-1000WCP40		
		CHKD	D.GILCZYNSKI	08/30/99			
		ENGR					
		MATERIAL COMPOSITE		MFG		SIZE B CODE IDENT NO. BVV DWG NO. 1000092	
				QUAL			
FINISH		DSGN ACTVY		SCALE NONE WEIGHT SHEET 1 OF 1			
		GOVT ACTVY					