

MasterColor CDM-TM

MasterColor CDM-TM 20W/830 T3.5 CL 1CT



Introducing the smallest 20W ceramic metal halide lamp together with the unique e-Vision® electronic ballast. It's visually pleasing and financially rewarding, so the focus can be on your merchandise and not the ceiling clutter.

Product data

• General Characteristics

Base	PGJ5
Bulb	T3.5
Bulb Finish	Clear
Operating Position	Universal [Any or Universal (U)]
Life to 5% failures	9000 hr
Life to 10% failures	10000 hr
Life to 20% failures	11000 hr
RatedAvgLife(See Family Notes)	12000 hr

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	84 (min), 87 (nom) Ra8
Color Designation	Warm White
Color Temperature	3000 K
Color Temperature technical	2975 K
Initial Lumens	1650 Lm
Luminous Efficacy Lamp EL	75 Lm/W
Lumen Maintenance 1000h	80 %
Lumen Maintenance 2000h	75 %
Lumen Maintenance 5000h	65 %
Lumen Maintenance 10000h	60 %
Design Mean Lumens EL	1100 Lm
Chromaticity Coordinate X	0.433 -
Chromaticity Coordinate Y	0.392 -

• Electrical Characteristics

System Power EL	24 W
Watts	20 W
Lamp Wattage EL	22.0 W
25°C, Rated	
Lamp Wattage EL	20.0 W
25°C, Nominal	
Lamp Voltage	100 V
Lamp Current EL	0.220 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	2.4 mg
Energy consumption kWh/1000h	24 kWh

• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.5 (max) - 8 (min) h500lx
--------------------------------	----------------------------

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Bulb Temperature	380 (max) C

PHILIPS

MasterColor CDM-TM

• Product Dimensions

Overall Length C	52 (max) mm
Diameter D	11.2 (max) mm
Light Center Length L	22.3 (min), 22.6 (nom), 22.9 (max) mm
Arc Length O	3 mm
Light Center Length L	0.87 in
Max Overall Length (MOL) - C	1.75 (max) in
Diameter D	0.44 in

• Product Data

Product number	140400
----------------	--------


Full product name	MasterColor CDM-TM 20W/830 T3.5 CL 1CT
Short product name	CDM20/TM/830 12PK
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12
Bar code on pack	46677140403
Bar code on case	50046677140408
Logistics code(s)	928087905115
tpd_ilcos_cd	MT/UB-20/830-H-PGJ5-11.2/52
eop_net_weight_pp	0.005 kg

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will


remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

Dimensional drawing

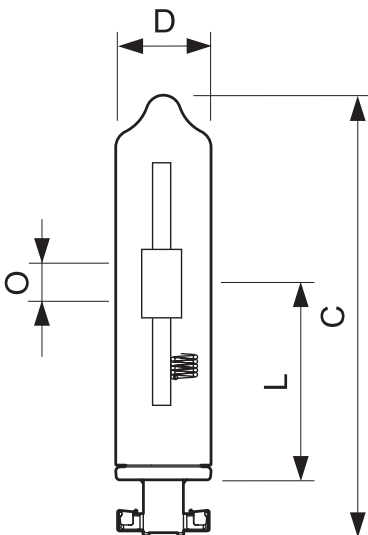


MasterColor CDM-TM 20W/830 T3.5 CL 1CT

Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Min)	O (Norm)	O (Max)
CDM-Tm 20W/830 PGJ5	52	11.2	22.3	22.6	22.9	-	3	-



PGJ5

Photometric data

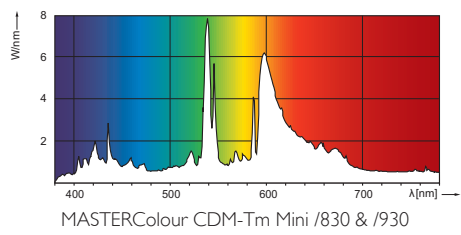

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, November 21
data subject to change