



## 6S6 CANDELABRA SCREW BASE CLUSTER LEDs

### ORDERING INFORMATION:

<u>CSB123</u>	<u>5</u>	<u>WC</u>	<u>1</u>	<u>24V/25</u>	-	<u>DP</u>
(A)	(B)	(C)	(D)	(E)		(F)

### (A) MODEL

- CSB123
- CSB144
- CSB188

### (B) NUMBER OF LEDs

- 5 = 5, T-1 3/4 CLUSTER LED (AVAILABLE IN ULTRA COLORS ONLY)
- 7 = 7, T-1 3/4 CLUSTER LED

### (C) LED LENS COLOR

WATER CLEAR

### (D) LED EMITTING COLOR & WAVELENGTH

- 1 = ULTRA RED (660nm) **OBSOLETE**
- 2 = STD. RED (630-635nm)
- U2 = ULTRA HI EFF. RED (623-630nm)
- 3 = STD. ORANGE (605-610nm)
- U3 = ULTRA ORANGE (612-620nm)
- 4 = STD. YELLOW (585nm)
- \*S4 = ULTRA YELLOW (590-595nm)
- 5 = STD. GREEN (565-570nm)
- \*6NW = ULTRA PURE GREEN (520-530nm)
- \*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
- \*10NW = ULTRA BLUE (465-475nm)
- \*12NW = SOFT WHITE (NO nm VALUE)
- \*MAX. CONTINUOUS CURRENT 10mA.**

### (E) STANDARD DC & AC OPERATING VOLTAGES/mA

- 5 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/15, 48V/12, 60V/15 & 120V/10
- 7 CLUSTER: 6V/75, 12V/50, 14V/50, 18V/25, 24V/25, 28V/25, 36V/25, 48V/12, 60V/15 & 120V/10

**NOTE:** PLEASE CALL FACTORY FOR OTHER VOLTAGES

### (F) CENTER CONTACT POLARITY

DP = DUAL POLARITY


### DIRECT INCANDESCENT LAMP REPLACEMENTS

3S6 & 6S6, ETC...


HOUSING MAT'L. UL94VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

MODEL: CSB123

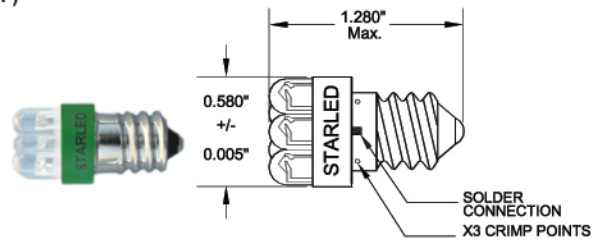

MODEL: CSB144

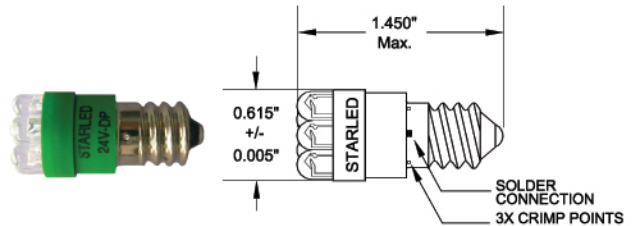

MODEL: CSB188

