STARLED®, INC.

T-4½ SINGLE, DOUBLE CONTACT BAYONET BASE, & 6S6 CANDELABRA SCREW BASE SUPER FLUX LEDs

ORDERING INFORMATION: CSB3SF (A) R (B) - 24V (C) - DP (D)

(A) MODEL
CSB3SF (CANDELABRA SCREW BASE)
SCB3SF (SINGLE CONTACT T4½ BASE)
DCB3SF (DOUBLE CONTACT T4½ BASE)

(B) LED EMITTING COLOR & WAVELENGTH
R = ULTRA HI EFF. RED (623nm-630nm)
Y = ULTRA YELLOW (590-595nm)
O = ULTRA ORANGE (605-610nm)
G = ULTRA PURE GREEN (520-530nm)
B = ULTRA BLUE (465-475nm)
BG = BLUISH GREEN (498-505nm)
W = FLUORESCENT WHITE (NO nm VALUE)
SW = SOFT WHITE (NO nm VALUE)

(C) STANDARD DC & AC OPERATING VOLTAGES
24V, 28V, 30V, 36V, 48V, 60V, & 120V
Note: Please call factory for other voltages.

(D) CENTER CONTACT POLARITY
DP = DUAL POLARITY

ALL LED LENSES ARE WATER CLEAR

HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

TOP VIEW

MODEL: CSB3SF

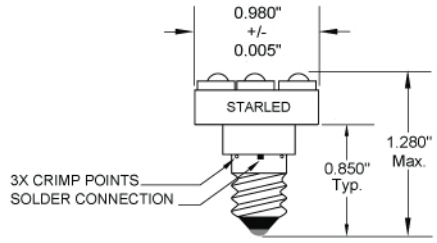

MODEL: SCB3SF

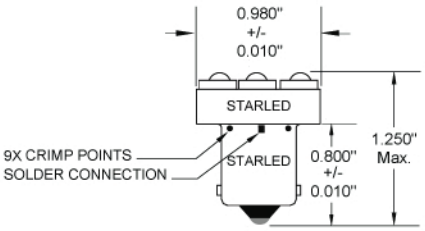
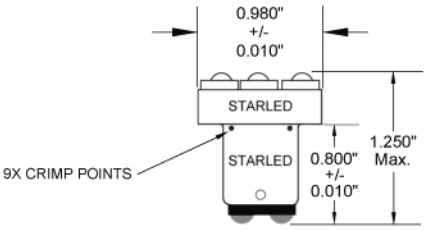
MODEL: DCB3SF