


DA12W300C2742-3001
Constant Current



Efficiency	>85%
Power Factor	>0.95
Case TC	90° Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP65
Class	Class 2 Power Supply
Dimming	ELV & TRIAC
Optional Dimming	0-10V

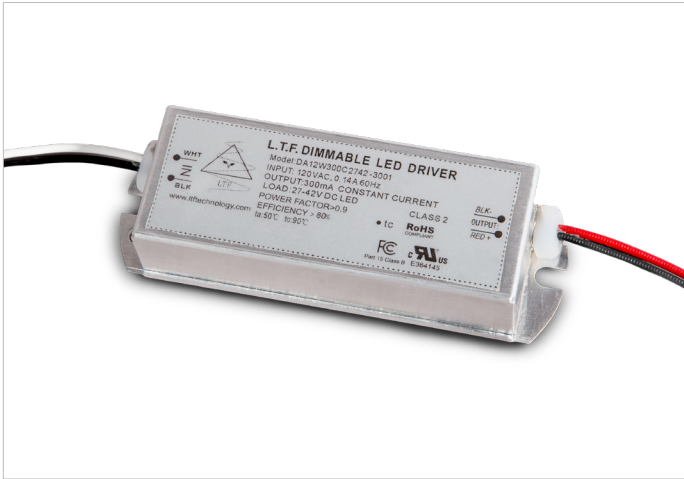

- Isolated output power per NEC and UL safety requirements
- UL and ETL recognized/ Listed, UL8750, 1310
- Auto-reset; Short circuit, Overload and thermal protections
- Dimmable with ELV and TRIAC type dimmers
- Aluminum casing for optimal heat dissipation



FEATURES

- Low profile, small form factor, junction box mountable
- Flicker free dimming and excellent dimming range
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD, FCC compliant

MODEL SPECIFICATIONS

Constant Voltage					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DA12W300C2742-3001	120V AC 50/60HZ	12W	27 - 42VDC	300 mA	T11

DIMMING CURVES

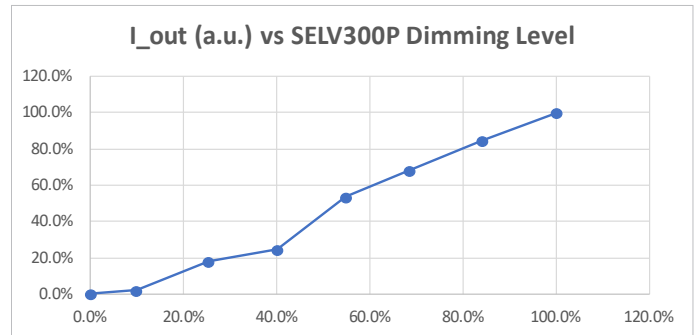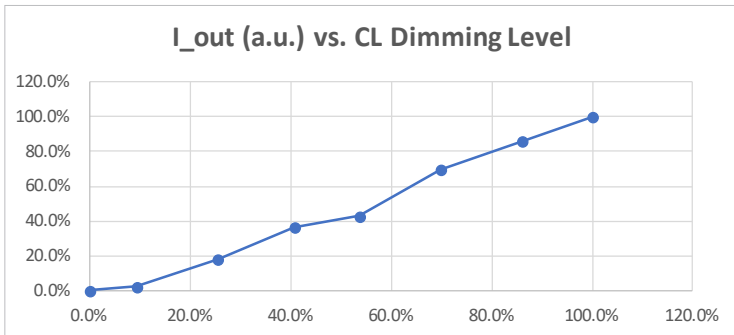

MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
T11	95 (77) x 31 x 21mm

T11

