


4

3

DWG NO. 1000215 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

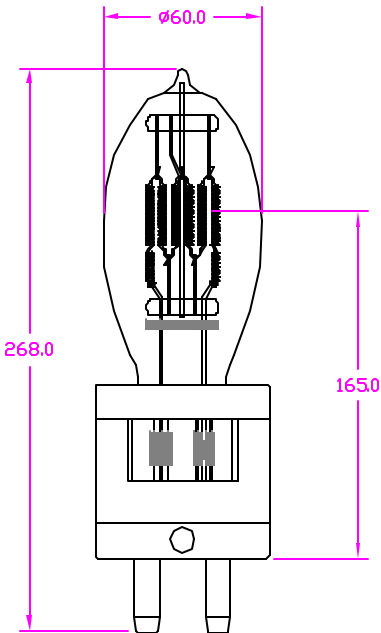

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	5000 W
TOTAL LUMEN	145000 Lm
COLOR TEMP.	3200 K
AVERAGE LIFE	500 HRS
BASE TYPE	G38
FILAMENT TYPE	C-13
BURN POSITION	BD±45°

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	05/14/01	TITLE DPY, JS120V-5000WC HALOGEN LAMP	
		CHKD	J.COOPER	05/14/01		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE		SIZE		CODE IDENT NO.	DWG NO.	
FINISH		DSGN ACTVY		B	DPY	1000215
		GOV'T ACTVY		SCALE	WEIGHT	SHEET
				NONE		1 OF 1

4

3

2

1

CAD