

DS22W600C2036MB2UD
Constant Current Driver

UNIDRIVER



Efficiency	85%
Power Factor	>0.90
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP67
Class	Class 2 Power Supply
Dimming	ELV, TRIAC, 0-10V
Output Voltage or Constant Current	600mA




- Universal input 100 - 305V AC 50/60Hz
- True Tri Mode Dimming at all input voltages ELV, TRIAC & 0-10V
- Smooth, flicker free
- Class 2 power supply
- Isolated output power per NEC and UL safety requirements

FEATURES

- UL & ETL recognized/listed, meets UL8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Efficient, High power factor >0.90



MODEL KEY

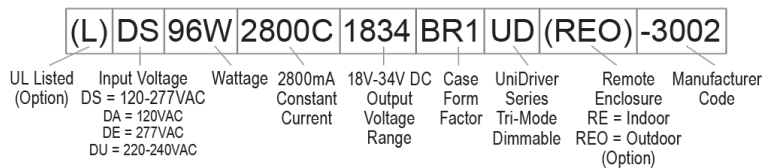

MODEL SPECIFICATIONS

Constant Voltage					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DS22W600C2036MB2UD	100 - 305V AC 50/60 Hz	22W	20V - 36VDC	600mA	MB2

DIMMING CURVES

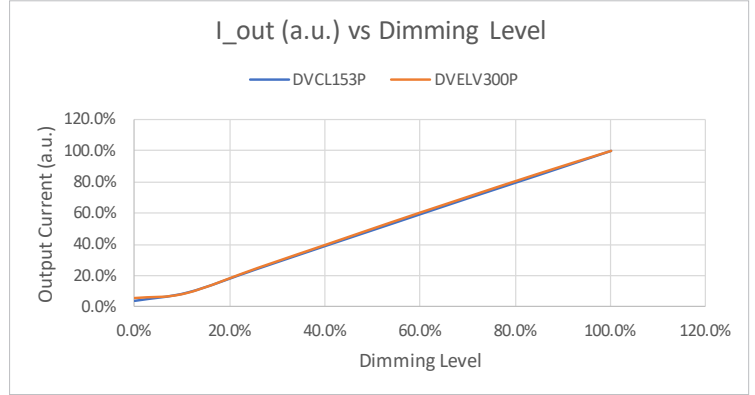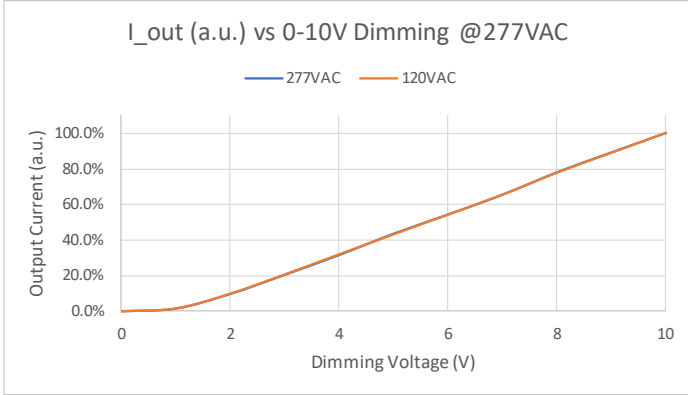

MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
MB2	78 x 40 x 22.1mm

