STARLED® INC.

1" MEDIUM EDISON SCREW BASE SUPER FLUX LEDs

ORDERING INFORMATION: EDB254SF (A) R (B) - 120V (C) - DP (D)

(A) MODEL
EDB254SF

(B) LED EMITTING COLOR & WAVELENGTH
R = ULTRA HI EFF. RED (623nm)
Y = ULTRA YELLOW (590-595nm)
O = ULTRA ORANGE (612-620nm)
G = ULTRA PURE GREEN (520-530nm)
B = ULTRA BLUE (465-475nm)
BG = BLUISH GREEN (498-508)
W = FLUORESCENT "WHITE" (NO nm VALUE)
SW = SOFT WHITE (NO nm VALUE)

(C) STANDARD OPERATING VOLTAGES
24V, 28V, 48V, 60V, & 120V

(D) CENTER CONTACT POLARITY
DP = DUAL POLARITY
NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE



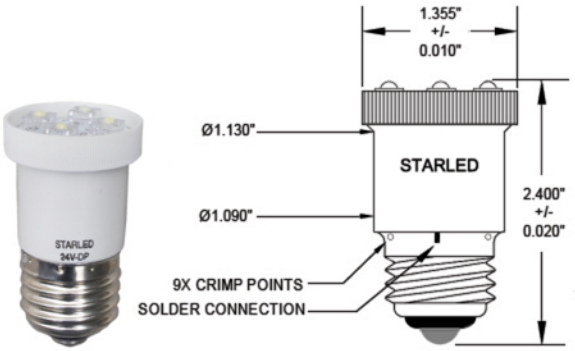

2059 E. DEL AMO BLVD. * RANCHO DOMINGUEZ BLVD. * TEL: (310) 603-0403 * FAX: (310) 603-1335