



CUSTOMER NAME \_\_\_\_\_  
 PROJECT NAME \_\_\_\_\_  
 DATE \_\_\_\_\_ TYPE \_\_\_\_\_  
 CATALOG NUMBER \_\_\_\_\_

## EFM1 Gen2 Medium Output Flood Light

The Evolve® LED Medium Output Flood Light is our mid-lumen solution to efficiently illuminate building facade, flag poles, billboard signage and many more traditional flood applications. Designed to replace from 150W - 400W HID flood light solutions.

### Construction

<b>Housing:</b>	Aluminum die cast enclosure. Integral heat sink for maximum heat transfer
<b>Lens:</b>	Impact resistant tempered glass
<b>Paint:</b>	Corrosion resistant polyester powder paint, minimum 2.0 mil thickness Standard = Black, Dark Bronze, Gray, White (RAL & custom colors available) Optional = Coastal Finish
<b>Weight:</b>	25 lbs (11.34 kgs)

### Optical System

<b>Lumens:</b>	8,500 to 29,000
<b>Distribution:</b>	3x3, 6x5, 6x6, 7x6, 7x7
<b>Efficacy:</b>	116-165 LPW
<b>CCT:</b>	2700K, 3000K, 4000K, 5000K
<b>CRI:</b>	≥70

### Electrical

<b>Input Voltage:</b>	120-277V & 277-480V
<b>Input Frequency:</b>	50/60Hz
<b>Power Factor:</b>	≥ 90% at rated watts
<b>Total Harmonic Distortion:</b>	≤ 20% at rated watts

### Surge Protection

TYPICAL	ENHANCED	EXTREME
6kV/3kA*	10kV/5kA*	20kV/10kA*

\*Per ANSI C136.2-2015

### Warranty

5 Year (Standard)

10 Year (Optional)

### Lumen Maintenance

Projected Lxx per IES TM-21-11 at 25°C

LUMEN CODES	DISTRIBUTION	LXX(10K) @ HOURS		
		25,000 HR	50,000 HR	60,000 HR
10, 15	77, 76, 67, 66, 65	L99	L99	L99
20, 25	77, 76, 67, 66, 65	L99	L99	L98
30	77, 76, 67, 66, 65	L94	L87	L85
10	33	L97	L97	L97
15, 20	33	L97	L96	L96
25	33	L97	L96	L95

Note: Projected LXX based on LM80 (> 10,000 hour testing). Accepted Industry tolerances apply to initial luminous flux and lumen maintenance measurements.

### Luminaire Ambient Temperature Factor

AMBIENT TEMP (°C)	INITIAL FLUX FACTOR	AMBIENT TEMP (°C)	INITIAL FLUX FACTOR
10	1.02	30	0.99
20	1.01	40	0.98

### Ratings

<b>Operating Temperature:</b>	-40°C to 50°C*
<b>Vibration^:</b>	3G - Slipfitter Mounting K1, K2, S1 & S2 3G - Trunnion Mounting T1
<b>LM-79:</b>	Testing in accordance with IESNA Standards

\*45°C for SKUs >168W at 120-277V with DALI (Option U)

^Per ANSI C136.31-2010

### Controls

<b>Dimming:</b>	Standard - 0-10V Optional - DALI (Option U)
<b>Sensors:</b>	Photo Electric Sensors (PE) available LightGrid+™ and Daintree Compatible

Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualifications.



## EFM1 Gen2

Medium Output Flood Light

CUSTOMER NAME \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

DATE \_\_\_\_\_ TYPE \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

### Ordering Information

E F M 1 0 2

7

PROD. ID	GEN	VOLTAGE	OPTIC CODE (lm)	DISTRIBUTION (NEMA HxV)	CRI	CCT	DIMMING	CONTROLS	MOUNTING	COLOR	OPTIONS
E=Evolve	02	0 = 120-277V <sup>1</sup>	10 = 10,000	33 = NEMA 3x3 <sup>3</sup>	7 = 70	27 = 2700K	A = ANSI C136.41 7-Pin Receptacle <sup>4</sup>	A = No Control	K1 = Knuckle slipfitter 1.9 in. - 2.3 in OD Tenon <sup>6</sup>	GRAY = Gray	F = Fusing <sup>1</sup>
FM= Flood Medium		1 = 120V	15 = 15,000	65 = NEMA 6x5		30 = 3000K	D = No receptacle, with external dimming 18/2 3 ft cable	D = Shorting Cap <sup>5</sup>	K2 = Knuckle slipfitter 1.9 in. - 2.3 in OD Tenon Supplied with 14/3 3ft power cable	BLCK = Black	H2 = Daintree Enabled motion Sensor <sup>7,8</sup>
1= Standard		2 = 208V	20 = 20,000	66 = NEMA 6x6		40 = 4000K	N = No PE Receptacle & Non Dimmable	E = ANSI C136.41 7-pin with non-Dimming PE Control <sup>5</sup>	S1 = Knuckle slipfitter 2.3-3.0 in. OD Tenon <sup>6</sup>	DKBZ = Dark Bronze	H4 = Motion Sensor (FSP221) <sup>3</sup>
		3 = 240V	25 = 25,000	76 = NEMA 7x6		50 = 5000K	P = ANSI C136.41 7-Pin Receptacle with external dimming 18/2 3 ft cable <sup>4</sup>		S2 = Knuckle slipfitter 2.3-3.0 in. OD Tenon, Supplied with 14/3 3ft power cable	WHITE = White	L = Tool-Less Entry
		4 = 277V	30 = 30,000 <sup>2</sup>	77 = NEMA 7x7					T1 = Trunnion with external 3ft #14/3 power cable		NOM = NOM31 <sup>11</sup>
		5 = 480V							V1 = Knuckle Wall Mount <sup>6</sup>		P06 = Prewired with 6ft #14/3 cable
		D = 347V									R = 10kV/5kA Enhanced Surge Protection Device (SPD)
		E = 277-480V <sup>1</sup>									T = 20kV/10kA Enhanced Surge Protection Device (SPD)
											U = DALI Dimming <sup>9</sup>
											VO = 3-Position Terminal Block
											V1 = FAM module
											Y = Coastal Finish <sup>10</sup>

**NOTES:**

- <sup>1</sup> Fusing requires discrete voltage
- <sup>2</sup> Not Available in 3x3 distribution
- <sup>3</sup> Max Lm output = 25K Lm
- <sup>4</sup> Restricted aiming angle of 0-45°
- <sup>5</sup> Can only be ordered with "A" or "P" Dimming Options
- <sup>6</sup> Supplied with leads
- <sup>7</sup> Not available in 347V, 480V OR 277-480V
- <sup>8</sup> Only available in K1 or S1 mount
- <sup>9</sup> Compatible with LightGrid+™ System
- <sup>10</sup> Recommended for installations within 750 feet from coast. Lead time varies, check with factory
- <sup>11</sup> Contact Manufacturer

CUSTOMER NAME \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

DATE \_\_\_\_\_ TYPE \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

LUMEN OUTPUT	DIST CODE	CLASSIFICATION (HxV)	TYPICAL INITIAL LUMENS				SYSTEM WATTAGE
			2700K	3000K	4000K	5000K	
10	77	7x7	9900	10600	11000	11000	67
15			13500	14550	15000	15000	91
20			18000	19400	20000	20000	124
25			22500	24250	25000	25000	162
30			26100	28130	29000	29000	195
10	76	7x6	9900	10600	11000	11000	67
15			13500	14500	15000	15000	91
20			18000	19400	20000	20000	124
25			22500	24200	25000	25000	162
30			26100	28100	29000	29000	195
10	66	6x6	9900	10600	11000	11000	67
15			13500	14500	15000	15000	91
20			18000	19400	20000	20000	124
25			22500	24200	25000	25000	162
30			26100	28100	29000	29000	195
10	65	6x5	8500	9200	9500	9500	67
15			11700	12600	13000	13000	91
20			15600	16800	17400	17400	124
25			19500	21000	21700	21700	162
30			22600	24400	25200	25200	195
10	33	3x3	10300	10600	11100	11100	78
15			13900	14400	15000	15000	105
20			18600	19200	20000	20000	144
25			23200	24000	25000	25000	186

For additional information on Shielded and Non-Shielded EFM IES files, please refer to LED.com

## EFM1 Gen2

Medium Output Flood Light

CUSTOMER NAME \_\_\_\_\_


PROJECT NAME \_\_\_\_\_

DATE \_\_\_\_\_ TYPE \_\_\_\_\_


CATALOG NUMBER \_\_\_\_\_

**EFM1**  
**NEMA 7x7**


29,000 Lumens  
4000K  
EFM102\_3077740\_IES



- Mounting Height at 35"
- 45° Tilt Initial Footcandle at Grade




- Vertical Axial Candela Distribution
- Horizontal Axial Candela Distribution




**EFM1**  
**NEMA 7x6**


29,000 Lumens  
4000K  
EFM102\_3076740\_IES



- Mounting Height at 35"
- 45° Tilt Initial Footcandle at Grade




- Vertical Axial Candela Distribution
- Horizontal Axial Candela Distribution




**EFM1**  
**NEMA 6x6**


29,000 Lumens  
4000K  
EFM102\_3066740\_IES



- Mounting Height at 35"
- 45° Tilt Initial Footcandle at Grade




- Vertical Axial Candela Distribution
- Horizontal Axial Candela Distribution




**EFM1**  
**NEMA 6x5**


25,200 Lumens  
4000K  
EFM102\_3065740\_IES



- Mounting Height at 35"
- 45° Tilt Initial Footcandle at Grade




- Vertical Axial Candela Distribution
- Horizontal Axial Candela Distribution




**EFM1**  
**NEMA 3x3**


25,000 Lumens  
4000K  
EFM102\_2533740\_IES



- Mounting Height at 35"
- 45° Tilt Initial Footcandle at Grade



- Vertical Axial Candela Distribution
- Horizontal Axial Candela Distribution



## EFM1 Gen2

Medium Output Flood Light

CUSTOMER NAME \_\_\_\_\_



PROJECT NAME \_\_\_\_\_

DATE \_\_\_\_\_ TYPE \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_



### H4 Motion Sensing Option

<b>Recommended Mounting Height:</b>	15-30' (4.6-9.1m)
<b>Coverage Radius:</b>	15-20' (4.6-6.1 m)
<b>Lateral Coverage:</b>	300 °
<b>Power:</b>	Adds < 1W to fixture power rating
<b>Total Harmonic Distortion:</b>	≤ 20% at rated watts
<b>Default Settings:</b>	
<b>Output:</b>	Occupied - 100% Unoccupied - 10%
<b>PE Sensor:</b>	None
<b>Ramp/Fade:</b>	Disabled
<b>Time (Off) Delay:</b>	5 min.
<b>Field:</b>	Programmable using FSIR-100 hand held programmer (197634)

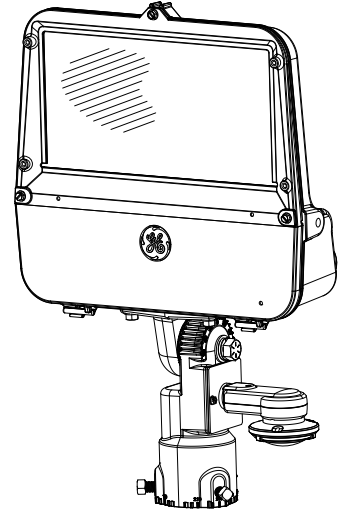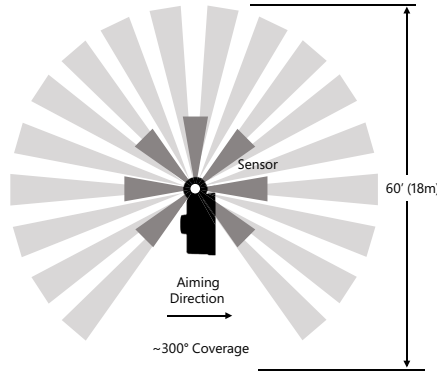

### H2 Motion Sensing Option

<b>Recommended Mounting Height:</b>	15-30' (4.6-9.1m)
<b>Coverage Radius:</b>	15-20' (4.6-6.1 m)
<b>Lateral Coverage:</b>	300 °
<b>Power:</b>	Adds < 1W to fixture power rating
<b>Total Harmonic Distortion:</b>	≤ 20% at rated watts
<b>Default Settings:</b>	
<b>Output:</b>	Occupied - 100% Unoccupied - 10%
<b>PE Sensor:</b>	None
<b>Ramp/Fade:</b>	Disabled
<b>Time (Off) Delay:</b>	10 min.
<b>Requires Daintree Networked and Wireless Area Controller (WAC)</b>	

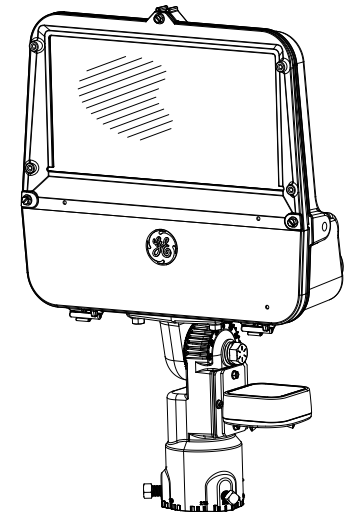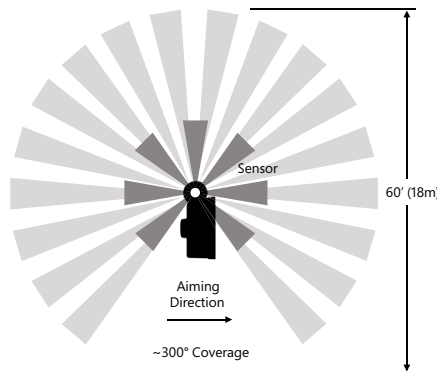

## EFM1 Gen2

Medium Output Flood Light


CUSTOMER NAME \_\_\_\_\_

PROJECT NAME \_\_\_\_\_


DATE \_\_\_\_\_ TYPE \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_


### TRUNNION MOUNT

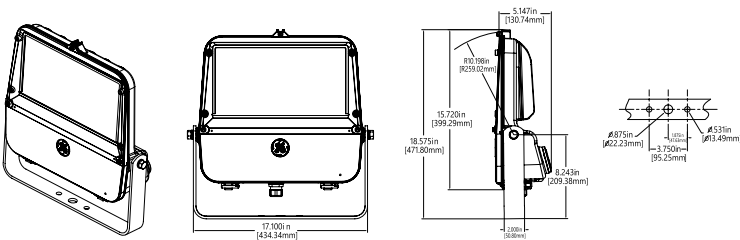


### KNUCKLE SLIPFITTER MOUNT

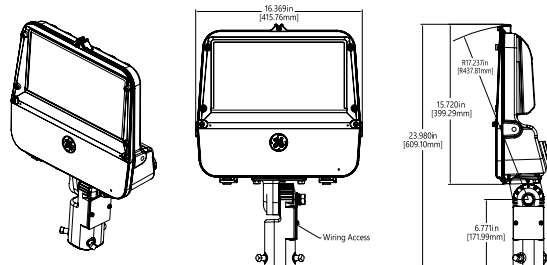

### KNUCKLE WALL MOUNT

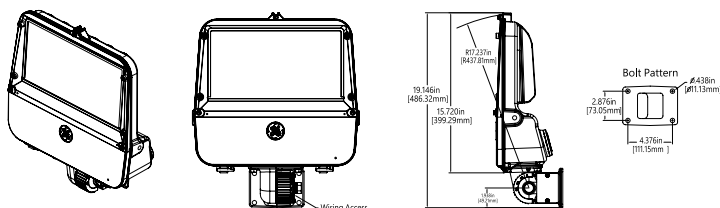

### EFM1 - PE AIMING RESTRICTIONS

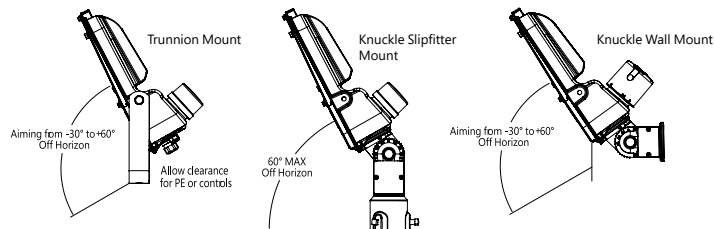

### Mounting

### Effective projected area

#### Option K

- K1=Knuckle Slipfitter for 2.3 in. OD Tenon. Lead wires exiting tenon.
- K2=Knuckle Slipfitter for 2.3 in. OD Tenon, ext. 3ft #14/3 cord.

#### Option S

- S1=Knuckle Slipfitter for 2.3 in-3.0 in. OD Tenon. Lead wires exiting tenon.
- S2=Knuckle Slipfitter for 2.3 in-3.0 in. OD Tenon, ext. 3ft #14/3 cord.

- 0° aim (vertical glass) 1.96 sq. ft.
- 45° aim 1.22 sq. ft.
- Side profile (all aims) 0.73 sq. ft.
- 90° (downward) aim 0.79 sq. ft.

### Accessories

SAP NUMBER	PART NUMBER	DESCRIPTION
93123552	WANSI - 277	ANSI C136.41 Dimming PE Daintree Enable, 105-305V
93123553	WANSI - 480	ANSI C136.41 Dimming PE Daintree Enable, 312-530V
93029237	PED-MV-LED-7	ANSI C136.41 Dimming PE, 120-277V
93029238	PED-347-LED-7	ANSI C136.41 Dimming PE, 347V
93029239	PED-480-LED-7	ANSI C136.41 Dimming PE, 480V
28299	PECOTL	Standard 120-277V
28294	PEC5TL	Standard 480V
80436	PECDTL	Standard 347V
73251	SCCL-PECTL	Shorting Cap

### SHIELDS

SAP NUMBER	PART NUMBER	DESCRIPTION	COLOR
93081902	TSVBLC- EFM	Top and Side Visor	Black
93081903	TSVDKBZ- EFM	Top and Side Visor	Dark Bronze
93081901	TSVGRAY- EFM	Top and Side Visor	Gray
93081904	TSVWHITE- EFM	Top and Side Visor	White
93080086	VAN- EFM	Vandal Shield	
93080087	WG- EFM	Wire Guard	
93079843	BDABLC- EFM	Barn Doors	Black
93079844	BDADKBZ- EFM	Barn Doors	Dark Bronze
93079842	BDAGRAY- EFM	Barn Doors	Gray
93079845	BDAWHT- EFM	Barn Doors	White

