



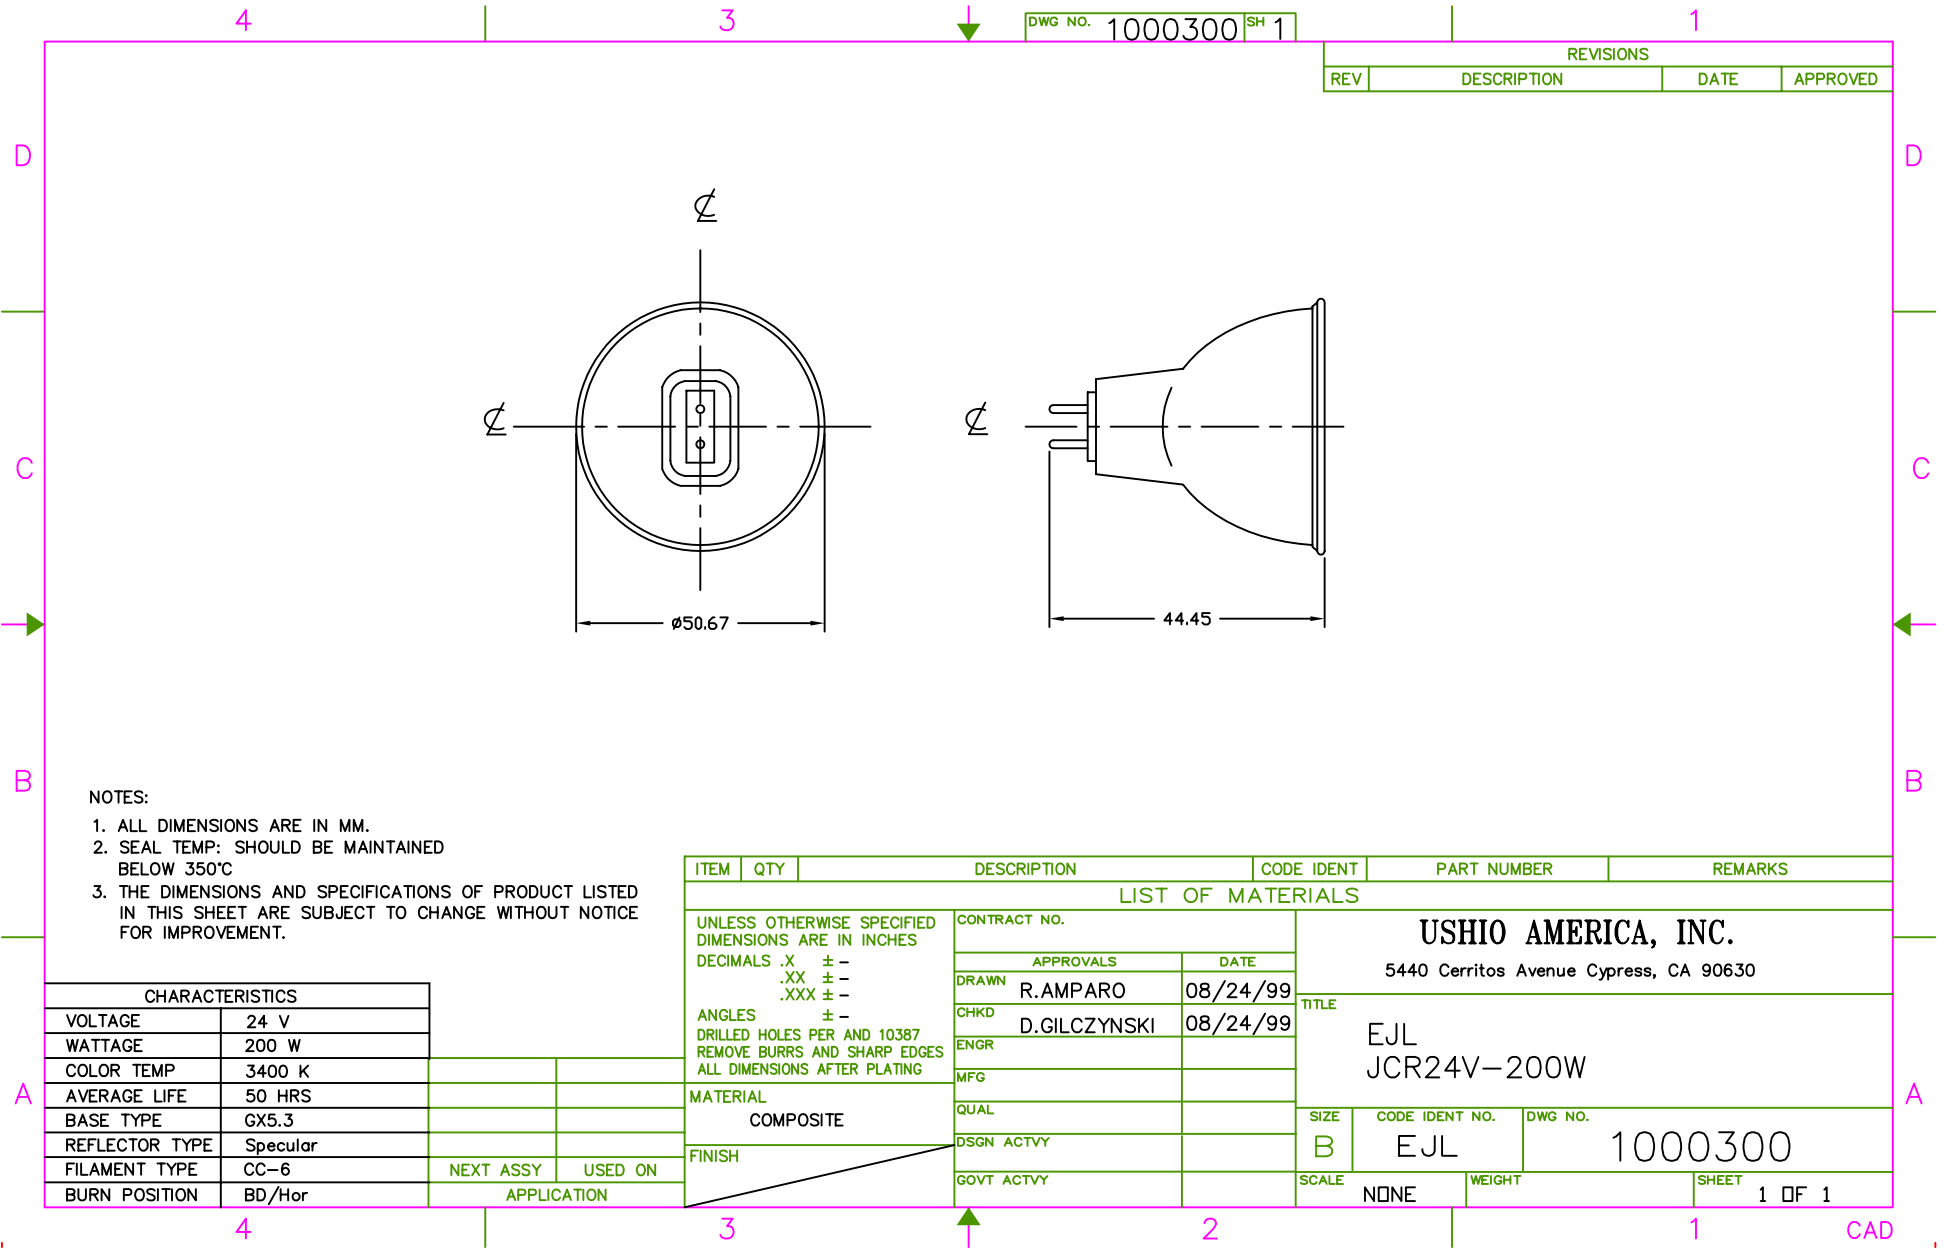

DWG NO. 1000300 SH 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

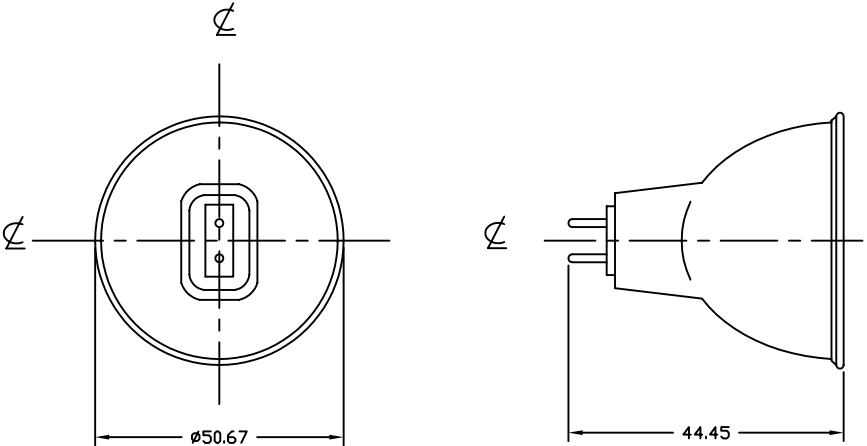

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	24 V
WATTAGE	200 W
COLOR TEMP	3400 K
AVERAGE LIFE	50 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Specular
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
		APPROVALS	DATE		
		DRAWN R.AMPARO	08/24/99	TITLE EJL JCR24V-200W	
		CHKD D.GILCZYNSKI	08/24/99		
		ENGR			
MATERIAL COMPOSITE		MFG		SIZE B CODE IDENT NO. EJL DWG NO. 1000300	
		QUAL			
		DSGN ACTVY		SCALE NONE WEIGHT SHEET 1 OF 1	
FINISH		GOVT ACTVY			