

Halogen Low Voltage

EJL 200W 24V



The long lifetime of most of the Halogen Low Voltage lamps is further extended by the unique P3 technology developed by Philips. This allows the lamp to be used at higher temperatures, thereby extending the lamp's lifetime, reducing early failures, and resulting in fewer maintenance man hour costs. P3 also ensures consistency of high-quality light output, and allows the lamp to be used in any burning position, which enables more compact fixture designs. In addition, the compact filament produces a clean white light and high beam intensity for true natural colors on stage and without any hotspots.

Product data

• General Characteristics

Philips Code	13164
ANSI Code	EJL
LIF Code	A1/252
Cap-Base	GX5.3
Bulb Material	Quartz-UV Open
Reflector Finish	Smooth
Operating Position	s90
Main Application	Projection
Life to 50% failures	50 hr

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature Technical	3400 K
Luminous Flux Lamp	1100 Lm

• Electrical Characteristics

Watts	200 W
Voltage	24 V
Dimmable	Yes

• Luminaire Design Requirements

Pinch Temperature	400 (max) C
Bulb Temperature	900 (max) C
Working Distance WD	32 mm

• Product Dimensions


Overall Length C	44.45 (max) mm
Diameter D	50.67 (max) mm
Filament Dimensions (WxH) [mm]	-

• Product Data

Product number	315085
Full product name	13164 200W GX5.3 24V 1CT
Short product name	13164 200W GX5.3 24V 1CT/24
Pieces per Sku	1
eop_pck_cfg	24
Skus/Case	24
Bar code on pack	8711500410580
Bar code on case	8711500419026
Logistics code(s)	923921120594
eop_net_weight_pp	0.025 kg


PHILIPS

Dimensional drawing

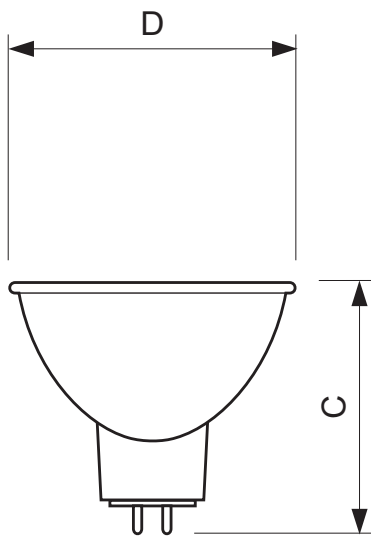

EKL 200W 24V

Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)
13164 200W GX5.3 24V	44.45	50.67	-	-	-



GX5.3



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change