

Emergency Lighting Series

Wet Location Emergency Light - Medium Lumen, External LED lamp heads



Features:

- 2 fully rotatating lamp heads.
- 24 hour recharge, 90 min discharge
- Easy installation
- Test switch and battery charging indicator
- Maintenance free Ni-Cad battery
- 3 Year Warranty



ELTPW G1 ME W
Wet Location Emergency Light - Medium Lumen External

Specifications

Voltage 120/277V AC	Operating Temperature 0°C to 50°C (32°F to 122°F)	Finish White
Housing Polycarbonate material and waterproof designed plastic enclosure with 5VA flame retardant and UV resistance.	Emergency Light Output LED external lamp heads, 660 Lumen output,	Warranty 3 Year warranty
Mounting Suitable for wall, side, and ceiling mount. Universal J-Box mount pattern on back plate.	Certifications UL listed for wet locations, NFPA 70, NFPA 101 life safety code. Complies with CEC title 20 efficiency regulations.	

CATALOG

Product Number	Description
ELTPW G1 ME W	Wet Location Emergency Light - Medium Lumen External

ORDERING GUIDE


Example: ELTPW G1 ME W

Fixture Type	Application	Generation	Voltage	Lumen Output	Lights Placement	Finish
• ELTP Emergency Light	• W Wet Location	• G1 First Generation	• BLANK 120-277 V	• M Medium Lumen Output	• E External	• W White



Parameters

Model	ELTPW G1 ME
Battery	Ni-Cad HT 7.2V2000mA
Recharge Time	24 Hours
Emergency Duration	90 Minutes
Input Voltage/Freq.	120/277V 60Hz
Input Current	20mA
Power Consumption	3.5W
Lamp Head	x2 2.5W
Lumen Output	660 Lm

Dimensions:

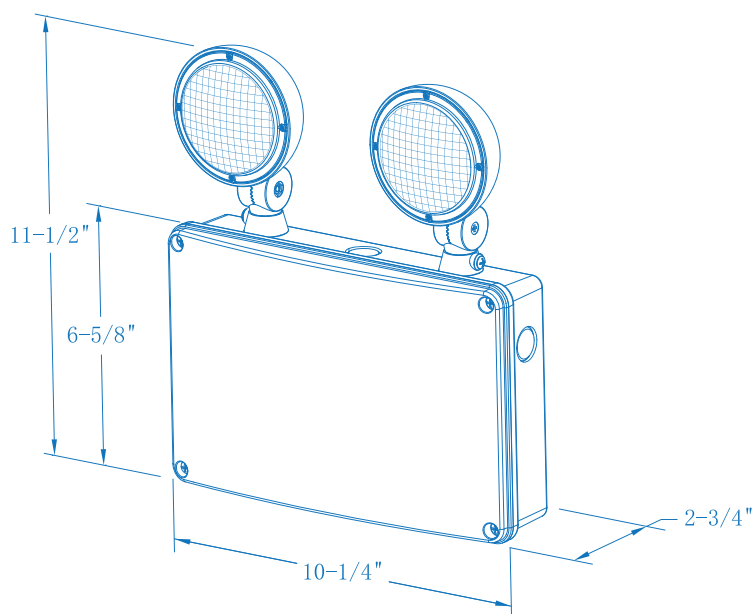

Photometrics

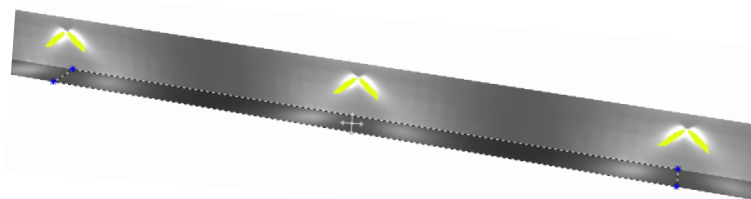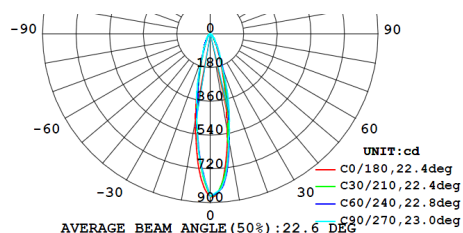

Model	Lumen Output	Distance Between (7.5 ft mount height)*	Distance Between (10 ft mount height)*
ELTPW	Ni-Cad HT 7.2V2000mA	70ft	63ft

*On a 6ft wide pathway