


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

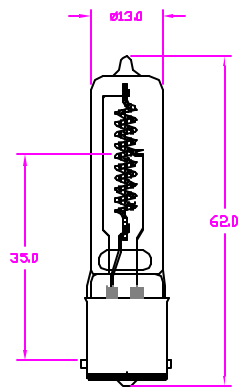

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350 °C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	150 W
TOTAL LUMEN	2800 Lm
COLOR TEMP.	2800 K
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	CC-B
BASE TYPE	BA15d
BULB FINISH	CLEAR
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritos Ave. Cypress, CA90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS			
ANGLES ±		DRAWN		TITLE	
DRILLED HOLES PER AND 10357 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		R.AMPARO			
MATERIAL		ENGR		ETC, JCV120V-150WGB HALOGEN LAMP	
COMPOSITE		J.COOPER			
FINISH		MFG		SIZE CODE IDENT NO. DWG NO.	
NEXT ASSY USED ON		QUAL			
APPLICATION		DRGN ACTVY		B ETC 1000373	
		DDVT ACTVY		SCALE NONE WEIGHT SHEET 1 OF 1	

4

3

1

4

3

2

1

CAD