

PHILIPS

Recessed

EvoKit Click LED Retrofit Kit 2x2



Project: _____

Location: _____

Cat.No: _____

Type: _____

Lamps: _____ Qty: _____

Notes: _____

Philips EvoKit click LED retrofit kit is an aesthetically pleasing and energy efficient LED retrofit kit designed to deliver a refreshed sleek and modern look with minimal material waste. Not only does it offer energy savings¹, it also helps reduce maintenance and installation costs due to its modular design, bulk packaging, and long LED lifetime. Additional information can be found at www.philips.com/evokit.

Products can be found on the DLC QPL by searching the 6 digit product number. Additional information can be found at www.philips.com/evokit.

EvoKit Click 2x2 with 0-10V Dimming ordering guide

Product Number	Description	Watts ³	Volts	Lumen Maint. (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Dim	Pkg	DLC Code
CLK (Standard)										
▲ 523589	EvoKit CLK 2x2 32L 29W 835 UNV 0-10 P4	29W	120-277	70,000	3200	3500	117	0-10	4 Pack	P5ZOVZ5C
523597	EvoKit CLK 2x2 32L 29W 840 UNV 0-10 P4	29W	120-277	70,000	3200	4000	119	0-10	4 Pack	P2B98AZY
521211	EvoKit CLK 2x2 32L 29W 835 UNV 0-10 P1	29W	120-277	70,000	3200	3500	117	0-10	Single Pack	PL1BNA6C
520221	EvoKit CLK 2x2 32L 29W 840 UNV 0-10 P1	29W	120-277	70,000	3200	4000	119	0-10	Single Pack	PAW881FC
CLKE (Energy Efficient)										
523621	EvoKit CLKE 2x2 32L 24W 835 UNV 0-10 P4	24W	120-277	70,000	3200	3500	141	0-10	4 Pack	PBBL99UF
523647	EvoKit CLKE 2x2 32L 24W 840 UNV 0-10 P4	24W	120-277	70,000	3200	4000	143	0-10	4 Pack	PCGIVN5U
521336	EvoKit CLKE 2x2 23L 16W 835 UNV 0-10 P1	16W	120-277	70,000	2300	3500	140	0-10	Single Pack	PMGH05VR
521344	EvoKit CLKE 2x2 23L 16W 840 UNV 0-10 P1	16W	120-277	70,000	2300	4000	142	0-10	Single Pack	PI1LMDP2
521377	EvoKit CLKE 2x2 32L 24W 835 UNV 0-10 P1	24W	120-277	70,000	3200	3500	141	0-10	Single Pack	PI1M1REQ
520247	EvoKit CLKE 2x2 32L 24W 840 UNV 0-10 P1	24W	120-277	70,000	3200	4000	143	0-10	Single Pack	PL4YKODF

See footnotes on the last page. ▲ Made to stock product (Contact your Philips sales representative for stock availability and lead time).



interact
ready.

EvoKit Click LED retrofit kit 2x2

EvoKit Click 2x2 with Selectable Power and Color ordering guide


Product Number	Description	Watts ³	Volts	Lumen Maint. (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Dim	Pkg	DLC Code
CLKES (Energy Efficient and Selectable Power and Color)										
▲ 269753	EvoKit CLKES 2x2 UNV 0-10 P4	17W	120-277	70,000	2600	3500	153	0-10	4 Pack	S-NEJXOV
					2700	4000	159	0-10		
					2650	5000	156	0-10		
		22W	120-277	70,000	3200	3500	145	0-10		
					3300	4000	150	0-10		
					3250	5000	148	0-10		
		25W	120-277	70,000	3600	3500	144	0-10		
					3700	4000	148	0-10		
					3650	5000	146	0-10		
▲ 269803	EvoKit CLKES 2x2 UNV 0-10 P1	17W	120-277	70,000	2600	3500	153	0-10	Single Pack	S-CO71SX
					2700	4000	159	0-10		
					2650	5000	156	0-10		
		22W	120-277	70,000	3200	3500	145	0-10		
					3300	4000	150	0-10		
					3250	5000	148	0-10		
		25W	120-277	70,000	3600	3500	144	0-10		
					3700	4000	148	0-10		
					3650	5000	146	0-10		

See footnotes on the last page.

▲ Made to stock product (Contact your Philips sales representative for stock availability and lead time).

Evokit click 2x2 with Selectable Power and Color

The Evokit click with Selectable Power and Color is field adjustable using 2 switches with 3 options each both for power and color temperature.

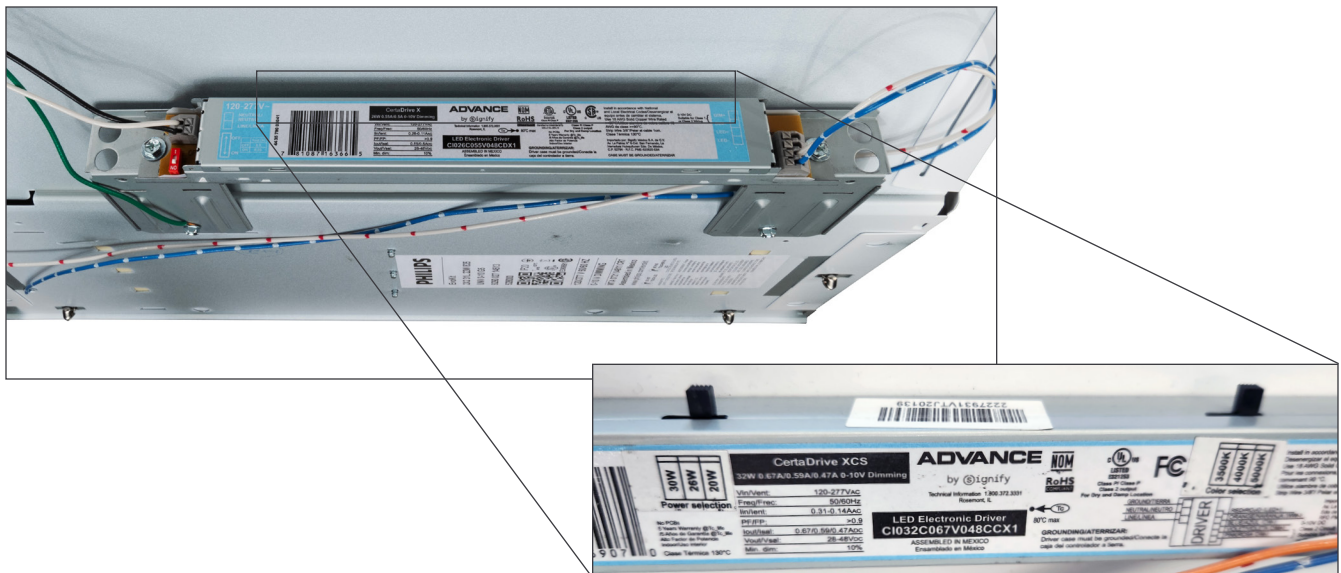

Selectable Power

Selectable Color

EvoKit Click LED retrofit kit 2x2

EvoKit Click 2x2 with Interact Pro scalable SWZCS ordering guide

Product Number	Description	Watts ³	Volts	Lumen Maint. (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Dim	Pkg	DLC Code
CLKE SWZCS (Energy Efficient Interact Pro scalable)										
116244	EvoKit CLKE 2x2 20L 15W 835 UNV SWZCS P4	15W	120-277	70,000	2000	3500	133	SWZCS	4 Pack	S-DLJ7WY
116236	EvoKit CLKE 2x2 20L 15W 840 UNV SWZCS P1	15W	120-277	70,000	2000	4000	133	SWZCS	Single Pack	S-UMRSX0
116228	EvoKit CLKE 2x2 20L 15W 840 UNV SWZCS P4	15W	120-277	70,000	2000	4000	133	SWZCS	4 Pack	S-ORPBNM
▲ 114140	EvoKit CLKE 2x2 32L 24W 840 UNV SWZCS P4	24W	120-277	70,000	3200	4000	138	SWZCS	4 Pack	PJHZ10F4
▲ 114157	EvoKit CLKE 2x2 32L 24W 835 UNV SWZCS P1	24W	120-277	70,000	3200	3500	136	SWZCS	Single Pack	PYFQUQV4
▲ 121376	EvoKit CLKE 2x2 32L 24W 840 UNV SWZCS P1	24W	120-277	70,000	3200	4000	138	SWZCS	Single Pack	P2WPWOM3
▲ 267674	EvoKit CLKE 2x2 32L 24W 835 UNV SWZCS P4	24W	120-277	70,000	3200	3500	136	SWZCS	4 pack	PG2IVTS2
116012	EvoKit CLKE 2x2 32L 24W 835 UNV SWZCS P4	24W	120-277	70,000	3200	5000	138	SWZCS	4 Pack	S-4V3HSL

See footnotes on the last page.

Third party sensors also available, please enquire about options for Lutron Athena, Vive, or others.

EvoKit Click 2x2 Tunable White TW with Interact Pro scalable SWZCS ordering guide

Product Number	Description	Watts ³	Volts	Lumen Maint. (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Dim	Pkg	DLC Code
CLKE TW SWZCS (Tunable White Energy Efficient Interact Pro scalable)										
▲ 114686	EvoKit CLKE 2x2 32L TW UNV SWZCS P4	23W	120-277	70,000	3200	6500	139	SWZCS	4 Pack	S-9CK2XY
		24W	120-277	70,000	3200	4000*	133	SWZCS		
		25W	120-277	70,000	3200	2700	128	SWZCS		

See footnotes on the last page.

▲ Made to stock product (Contact your Philips sales representative for stock availability and lead time).

* Default color temperature.

Interact Pro scalable sensor for Foundation, Advanced & Enterprise tiers (SWZCS and an evolution of SpaceWise)

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the Foundation mode (similar to SpaceWise) when configured without a gateway or in an Interact Pro Advanced or Enterprise mode if a compatible gateway is used.
- Interact Pro includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & BlueTooth connectivity. The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote onsite to identify and group devices together.
- Compatible with:
 - UID8451/10 or UID8451/50 wireless dimmer switch
 - SWS200 or SWS201 wireless scene switch
 - IRT9015 – handheld remote for grouping and configuration (at least one remote required for any SWZCS installation)
- For more info on Interact Pro visit: www.interact-lighting.com/interact-proscalablesystem
- For more information on Interact Ready visit: www.philips.com/interact-ready

EvoKit Click LED retrofit kit 2x2


interact

	Gateway Connected		
	Standalone	Option 1	Option 2
<u>Dimming, grouping, and zoning</u>	✓	✓	✓
<u>Bluetooth and ZigBee enabled</u>	✓	✓	✓
<u>Motion sensing and daylight harvesting</u>	✓	✓	✓
<u>Integration with 0-10V and phase dimming fixtures</u>	✓	✓	✓
<u>Code compliance</u>	✓	✓	✓
<u>Granular dimming and dwell time</u>	✓	✓	✓
<u>Correlated color temperature (CCT) tuning by switch</u> New	✓	✓	✓
<u>Support for sensor-based Tunable White luminaires</u> New	✓	✓	✓
<u>Energy reporting and monitoring</u>		✓	✓
<u>Scheduling</u>		✓	✓
<u>Demand response</u>		✓	✓
<u>BMS integration (BACnet)</u>			✓
<u>Floor plan visualization</u>			✓
<u>IoT sensors for wellness</u>			✓
<u>IoT Apps for productivity</u>			✓

Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
• Luminaires with integrated sensors	150
• Smart TLEDS	150
• Zones + groups	64
Total number of ZGP devices (sensors and switches)	50
• Sensors	30
• Switches	50
Group level	
Recommended number of lights	40 (maximum 150)
Number of ZGP devices	5
Number of scenes	16

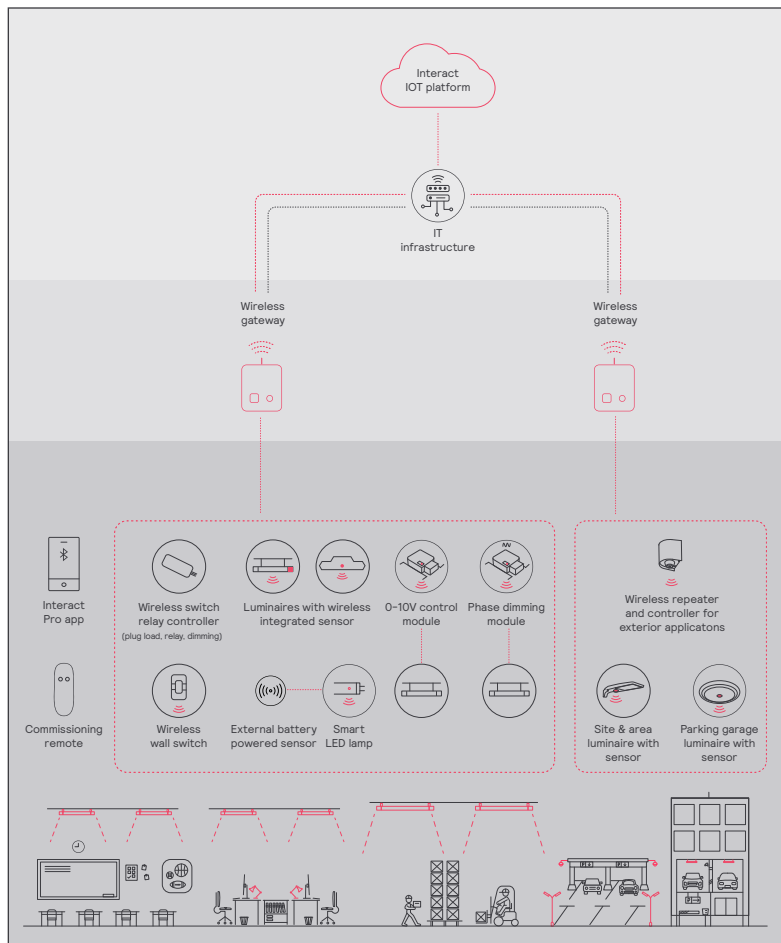

EvoKit Click LED retrofit kit 2x2

EvoKit Click 2x2 with Spacewise SWZDT ordering guide

Product Number	Description	Watts ³	Volts	Lumen Maint. (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Dim	Pkg	DLC Code
CLKE SWZDT (Energy Efficient SpaceWise DT)										
523878	EvoKit CLKE 2x2 32L 24W 840 UNV SWZ P4	24W	120-277	70,000	3200	4000	138	SWZDT	4 Pack	PAV1FT8Y
523464	EvoKit CLKE 2x2 32L 24W 835 UNV SWZ P1	24W	120-277	70,000	3200	3500	136	SWZDT	Single Pack	PIT3B0KJ
▲ 523472	EvoKit CLKE 2x2 32L 24W 840 UNV SWZ P1	24W	120-277	70,000	3200	4000	138	SWZDT	Single Pack	PJOW6RSK

See footnotes on the last page.


▲ Made to stock product (contact your Philips sales representative for stock availability and lead time).
Third party sensors also available, please enquire about options for Lutron Athena, Vive, or others.

Features


- Standalone daylight and occupancy sensing with advanced grouping, wireless mesh networking and dwell time.
- Commissioning via compatible Android phone and Philips Field App.
- Register for the commissioning app at <http://registration.componentcloud.philips.com/appregistration/>

EvoKit Sensor Ready (SR) with Philips Advance Xitanium SR for connected lighting solutions

EvoKit SR is a new platform that allows users to choose different control platforms to suit their needs and budget; from simple occupancy and daylight sensing to cloud-connected data-reporting sensing. This empowers users to fine-tune their energy use for reduced energy costs. Various Interact, Philips SpaceWise, and EasySense controls are available. Please refer to Philips.com/EvoKit for details. Contact your Philips representative for a current list of additional approved sensors. Sensors are connected in the field with just a few simple steps:

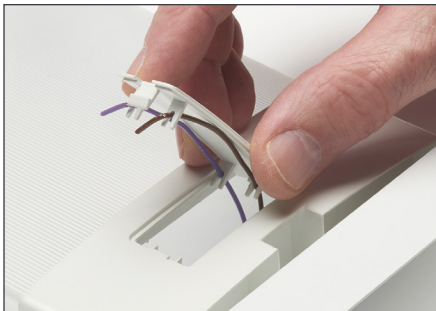

Step 1: EvoKit click SR is shipped with a plate covering the sensor hole. There are two wires secured to the back of the plate. The plate can be removed before or after you install the EvoKit click SR in the ceiling.

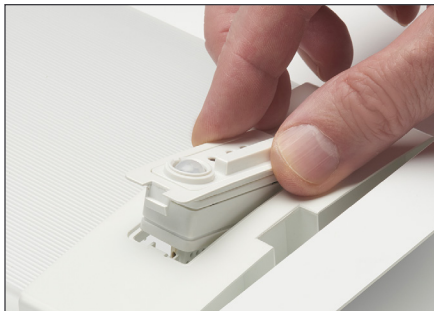

Step 2: Remove the two wires that were secured to the back of the plate and insert them in an approved sensor for use with EvoKit. They are not polarity sensitive.



Step 3: An adapter bracket is shipped with every EvoKit click SR. Install this adapter ring to the sensor and make sure it is securely fit. Then place the sensor and adapter bracket into the EvoKit SR endcap.

EvoKit Click LED retrofit kit 2x2

EvoKit Click with 0-10V Dimming and MultiOne Mobile ordering guide

Product Number	Description	Watts ³	Volts	Lumen Maint. (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Dim	Pkg	DLC Code
CLKE M (Energy Efficient with MultiOne Mobile)										
115550	EvoKit CLKE 2x2 32L 24W 840 0-10 M P4	24W	120-277	70,000	3200	4000	140	0-10	4 pack	S-TDZAE4
115568	EvoKit CLKE 2x2 32L 24W 835 0-10 M P4	24W	120-277	70,000	3200	3500	138	0-10	4 pack	S-O78S61

See footnotes on the last page.

EvoKit Click with 0-10V Dimming, MultiOne Mobile and Daylight/Occupancy sensor ordering guide

Product Number	Description	Watts ³	Volts	Lumen Maint. (Hrs.) ²	Approx. Lumens ³	Color Temp. (K)	Efficacy	Dim	Pkg	DLC Code
CLKE M DO (Energy Efficient with MultiOne Mobile and Daylight/Occupancy sensor)										
115618	EvoKit CLKE 2X2 32L 24W 840 0-10 M DO P4	24W	120-277	70,000	3200	4000	139	0-10	4 pack	S-OAP4JV
115626	EvoKit CLKE 2X2 32L 24W 835 0-10 M DO P4	24W	120-277	70,000	3200	3500	137	0-10	4 pack	S-60XB30

See footnotes on the last page.

EvoKit bulk pack

EvoKit click is designed to reduce the hidden environmental costs of lighting retrofits. With newly designed multi-unit packaging for EvoKit click, cardboard waste from the 2x4 and 2x2 troffer kits has been reduced by 66% and 77% respectively compared to its predecessor, EvoKit Gen4. Previously, only 24 kits were able to fit on a single pallet, but, with the new multi-unit packaging, 60 2x4 kits fit on one pallet. This allows for 3,840 units to be fully loaded onto a 53' truck compared to 1,536 units of the previous generation. This results in 2.5x better transportation utilization and storage capacity with the EvoKit click.



Commercial Product Name	Order Code
EasySense EVO200	516575
Philips single rocker self powered wireless switch	UID8451/10

* EVO200 comes pre-installed in the Gen4 bracket. To install in EvoKit click, this bracket will need removed in the field. Please see www.philips.com/evokit for instructions on removing bracket.

EvoKit Click LED retrofit kit 2x2

EvoKit Click air return accessories ordering guide


Product Number	Description	Packaging
EvoKit click air return accessories		
115782	EvoKit Click 2x2 Air Return Accessory P16	Serves 16 EvoKit Click retrofit kits (includes 32 parts)

Air Return accessories data

The air return grille of EvoKit Click are suitable for retrofitting listed air return troffers.


2x2 air return data						
Return Air Volume, SCFM.	61	69	80	97	112	131
Negative Static Pressure, in. H ₂ O	0.11	0.15	0.20	0.30	0.40	0.55
Noise Criteria (NC)*	17	21	25	31	34	38

Note: 24 total air slots, each 30mm x 6mm.

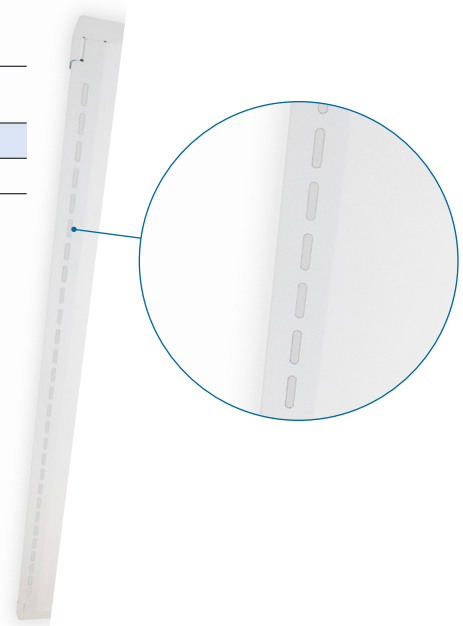


Dimensions 2x2

EvoKit click was designed to fit into most parabolic and lensed-recessed troffers with minimum dimensional requirements shown below. Philips recommends a sample installation prior to ordering project quantities to ensure compatibility. Philips EvoKit click retrofit kits are not compatible with air handling fixtures.

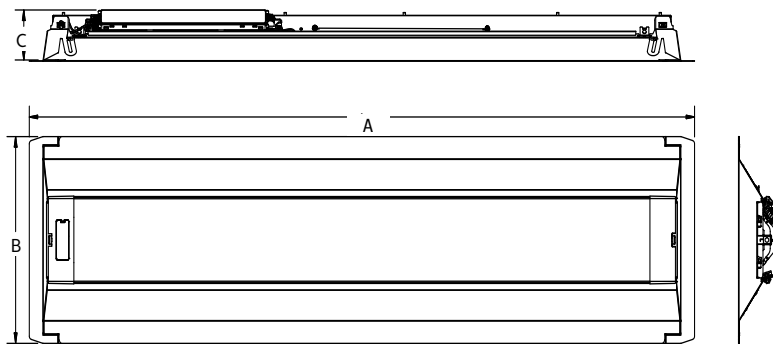

A - Face Plate Length	B - Face Plate Width	C - Height
23.9"	23.9"	2.99"

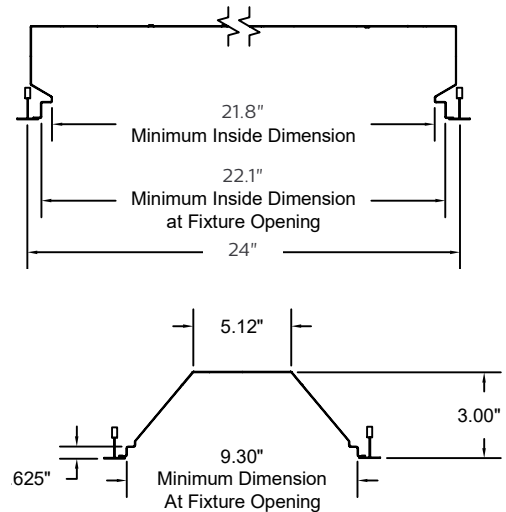

**Please Note: When installing emergency lighting, a greater minimum depth may be required.

EvoKit Click LED retrofit kit 2x2

Application

- A highly efficient, visually comfortable, architecturally styled LED retrofit kit designed to replace recessed linear fluorescent troffers.
- Unique modular design offers refreshing new look in the ceiling when compared to traditional fluorescent luminaires.
- Single light bar combined with slanted troffer helps reflect light to reduce glare and provide uniform light distribution making it ideal for applications such as offices, schools, healthcare and retail.
- Excellent color rendering with a CRI above 80.
- Extremely high efficacies up to 149 lumens per watt.
- LEDs are an excellent source for use with controls since dimming or frequent switching does not degrade the performance or life of the source.
- Designed for use with standard grid (NEMA "G") or Narrow Grid (NEMA "NFG") ceiling T-Grids.
- High efficiency source and luminaire design help significantly reduce energy consumption and more easily comply with known energy codes.
- Helps meet regulation requirements such as ASHRAE 90.1 and Title 24 when matched with suitable controls.
- EvoKit click is designed for use in most recessed troffers. Some existing fixtures may have features which interfere. Please refer to schematics below.

Enclosure Construction/Finish

- Simple design allows for quick installation in existing luminaire without the need to break the ceiling plenum.
- Constructed using galvanized steel – fights rust and makes for more durable product.
- Integrated secure tabs for connection to existing troffer housing.
- Minimum depth of only 3" necessary to allow proper clearance and installation of the EvoKit.
- Retrofit kit is powder coated after fabrication with high quality, durable finish to ensure no unfinished edges and avoid future potential of corrosion.
- Components fit together easily without the need for tools during installation. In addition the light module can be removed from below ceiling for convenient maintenance/upgrades.

Electrical

- Multiple driver options available:
 - Philips Advance CertaDrive drivers with 0-10V dimming allow for maximum fixture efficiency and provide 10% dimming.
 - Philips Advance Xitanium SR drivers allow for connectivity options to multiple platforms.
- 5-year limited warranty includes all components of the retrofit kit, including driver, LED board and nonelectrical components.**
- Listed with UL and Design Lights Consortium† to ensure quality performance and safety standards are met.
- High efficiency LEDs have a minimum 70,000 hour rated life (L70).

Accessories

- Suitable for use with Philips 503441 emergency backup or with Philips ER100 UL924 emergency relay.
- Earthquake cables available for additional support to the existing troffer for areas where required.
- EvoKit accessory replacement kit comes with quarter turns (51 pieces), quick disconnects (12 pieces), spare sensor brackets (12 pieces) and troffer retrofit labels (12 pieces).

Prod. No.	Description
502435	Earthquake cable 317mm
503441	EvoKit field installed emergency battery backup
522094	EvoKit accessory replacement kit
563569	EvoKit field installed ER100 UL924 emergency relay (requires the use of the ER100 field installation kit of wires and screws)
266833	EvoKit ER100 field install kit (comes in pack of 20). One pack needed per emergency relay

EvoKit Click LED retrofit kit 2x2

EvoKit CLKE 1x4 23L 16W 835 UNV 0-10 P1, 2,368 delivered lumens

Catalog No. 521211
 Test No. 21211
 S/MH 1.4
 Lamp Type LED
 Lumens/Watt 117
 Input Watts 29

Candlepower		45	Cross	Back-45
Angle	End			
0	1233	1233	1233	1233
5	1223	1227	1233	1227
15	1181	1186	1193	1184
25	1083	1079	1088	1077
35	923	918	930	915
45	712	728	741	725
55	499	539	545	535
65	312	360	362	355
75	155	212	224	208
85	37	75	75	71

The photometric results were obtained in the Design Lights Consortium Test Lab which is NVLAP accredited by the National Institute of Standards and Technology Photometric values based on tests performed in compliance with LM-79

Coefficients of Utilization Effective floor cavity reflectance 20 per (pfc=0.20)

pcc	80			70			50	
	70	50	30	70	50	30	50	30
pw								
RCR								
0	119	119	119	116	116	116	111	111
1	109	104	100	106	102	98	98	95
2	99	91	85	97	89	83	86	81
3	91	80	72	88	79	71	76	70
4	83	72	63	81	70	62	68	61
5	77	64	55	75	63	55	61	54
6	71	58	49	69	57	49	55	48
7	66	53	44	64	52	44	50	43
8	62	48	40	60	48	40	46	39
9	58	44	36	56	44	36	43	35
10	54	41	33	53	40	33	39	23

Light Distribution			Average Luminance			
Degrees	Lumens	% Luminaire	Angle	End	45°	Cross
0-30	947	29.9	45	3418	3498	3559
0-40	1520	48.0	55	2954	3191	3225
0-60	2550	80.5	65	2505	2891	2912
0-90	3169	100	75	2036	2780	2944
			85	1434	2926	2938

EvoKit CLKE 2x2 23L 16W 835 UNV 0-10 P1, 2,313 delivered lumens

Catalog No. 521336
 Test No. 21336
 S/MH 1.4
 Lamp Type LED
 Lumens/Watt 140
 Input Watts 16

Candlepower		45	Cross	Back-45
Angle	End			
0	931	931	931	931
5	925	923	931	927
15	885	885	891	885
25	804	799	797	801
35	684	662	655	667
45	536	514	511	518
55	370	366	365	371
65	219	238	232	242
75	103	134	135	137
85	21	43	41	47

The photometric results were obtained in the Design Lights Consortium Test Lab which is NVLAP accredited by the National Institute of Standards and Technology Photometric values based on tests performed in compliance with LM-79

Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

pcc	80			70			50	
	70	50	30	70	50	30	50	30
pw								
RCR								
0	119	119	119	116	116	116	111	111
1	109	105	101	107	102	99	98	95
2	100	92	85	97	90	84	87	81
3	91	81	73	89	80	72	77	71
4	84	72	64	82	71	63	69	62
5	78	65	56	75	64	56	62	55
6	72	59	50	70	58	50	56	49
7	67	54	45	65	53	45	51	44
8	62	49	41	61	48	40	47	40
9	58	45	37	57	45	37	43	36
10	55	42	34	53	41	34	40	33

Light Distribution			Average Luminance			
Degrees	Lumens	% Luminaire	Angle	End	45°	Cross
0-30	705	31.3	45	2040	1953	1944
0-40	1121	49.7	55	1732	1718	1709
0-60	1849	82	65	1391	1516	1475
0-90	2255	100.0	75	1065	1391	1406
			85	650	1328	1250

EvoKit CLKE 1x4 32L 25W 835 UNV SR P1, 3,438 delivered lumens

Catalog No. 521385
 Test No. 21385
 S/MH 1.4
 Lamp Type LED
 Lumens/Watt 136
 Input Watts 26

Candlepower		45	Cross	Back-45
Angle	End			
0	1296	1296	1296	1296
5	1291	1287	1294	1287
15	1234	1231	1240	1231
25	1124	1110	1107	1110
35	957	924	914	924
45	750	715	714	716
55	520	513	509	513
65	311	335	326	335
75	148	189	191	190
85	32	62	59	65

Comparative yearly lighting energy cost per 1000 lumens - \$1.80 based on 3000 hours and \$0.08/kWh

The photometric results were obtained in the Design Lights Consortium Test Lab which is NVLAP accredited by the National Institute of Standards and Technology

Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

pcc	80			70			50	
	70	50	30	70	50	30	50	30
pw								
RCR								
0	119	119	119	116	116	116	111	111
1	109	105	101	107	102	99	98	95
2	100	92	85	97	90	84	86	81
3	91	81	73	89	80	72	77	71
4	84	72	64	82	71	63	69	62
5	78	65	56	75	64	56	62	55
6	72	59	50	70	58	50	56	49
7	67	54	45	65	53	45	51	44
8	62	49	41	61	48	40	47	40
9	58	45	37	57	45	37	43	36
10	55	42	34	53	41	34	40	33

Light Distribution			Average Luminance			
Degrees	Lumens	% Luminaire	Angle	End	45°	Cross
0-30	979	31.2	45	2850	2720	2714
0-40	1558	49.6	55	2439	2407	2387
0-60	2569	81.9	65	1981	2133	2073
0-90	3138	100.0	75	1541	1967	1979
			85	993	1903	1815

Photometric values based on tests performed in compliance with LM-79

EvoKit Click LED retrofit kit 2x2

Energy saving solution – EvoKit CLKE 2'x2'

Estimated lighting costs using a standard 2 lamp U bend 2x2 troffer

Present wattage	59	W
× Annual operating hours	4,380	hrs
	=	258,420 Watt-Hours
÷ 1,000 =	258.40	kWh per year
× kWh rate of \$0.10 =	\$25.84	per year
× 125 fixtures	\$3,230.25	annual energy cost per space

Estimated lighting costs using a using a Philips 32L 2x2 EvoKit CLKE

Present wattage	24	W
× Annual operating hours	4,380	hrs
	=	105,120 Watt-Hours
÷ 1,000 =	105.12	kWh per year
× kWh rate of \$0.10 =	\$10.51	per year
× 125 fixtures	\$1,314.00	annual energy cost per space

Total estimated annual savings[‡] \$1,916.25

[‡] Based on 125 fixtures per space operating 4,380 hours a year. 125 fixtures is roughly equivalent to a 10,000 square foot space. kWh rates will vary.

Footnotes:

- 1) Please refer to the energy saving chart above for details.
- 2) L70 72,000 hours @ 35°C based on TM21 and LM80.
- 3) Based on photometric testing consistent with IES LM-79. Actual wattage may differ by +/- 10%. Actual initial lumen output may vary between -10 and +10% of the rated lumens.

***Please visit <http://www.usa.lighting.philips.com/support/support/warranty> for full details.

- † Restrictions on Hazardous Substances (RoHS) is a European directive (2002/95/EC) designed to limit the content of 6 substances [lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE)] in electrical and electrical products. For products used in North America, compliance with RoHS is voluntary and self-certified.
- ‡ Evokit luminaires are Design Lights Consortium qualified. Please see the DLC QPL list for exact catalog numbers (<http://www.designlights.org/QPL>).

© 2025 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

EvoKit Click 2x2 Spec 01/25 page 10 of 10 philips.com/lighting



Signify North America Corporation
400 Crossing Boulevard,
Bridgewater, NJ 08807
Telephone 800-555-0050

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone 800-668-9008

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.