



T5 Standard

14W/830 Min Bipin T5 HE ALTO UNP

Philips T5 Fluorescent Lamps featuring ALTO® Lamp Technology offer increased energy savings and low toxicity in a slim profile.

Product data

• General Characteristics

System Description	High Efficiency
Base	Miniature Bipin
Base Information	Green [Green Base]
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Rated Avg. Life	24000 hr
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation	Warm White
Color Temperature	3000 K
Luminous Flux EL	1200 Lm
25°C, Rated	
Luminous Flux EL	1200 Lm
25°C, Nominal	
Initial Lumens	1350 Lm
Lum Efficacy Rated	86 Lm/W
HF 25°C	

Lum Efficacy Rated	99 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Electrical Characteristics

Watts	14 W
Lamp Wattage EL	14.0 W
25°C, Rated	
Lamp Wattage EL	14 W
25°C, Nominal	
Lamp Wattage EL	13.7 W
35°C	
Lamp Voltage EL	86 V
25°C	
Lamp Voltage EL	82 V
35°C	
Lamp Current EL	0.165 A
25°C	

T5 Standard

Lamp Current EL 0.170 A
 35°C
 Dimmable Yes

Insertion Length B 553.7 (min), 556.1 (max) mm
 Overall Length C 563.2 (max) mm
 Diameter D 17 (max) mm

• Environmental Characteristics

Energy Efficiency Label (EEL) A
 Mercury (Hg) Content 1.4 mg

• Measuring Conditions

Calibration Current 0.170 A
 HF Generator Rated Voltage 167 V
 Resistor 500 ohm


• Product Dimensions

Base Face to Base Face A 549.0 (max) mm

• Product Data


Product number 230771
 Full product name 14W/830 Min Bipin T5 HE ALTO UNP
 Short product name F14T5/830/ALTO 40PK
 Pieces per Sku 1
 eop_pck_cfg 40
 Skus/Case 40
 Bar code on pack 46677230777
 Bar code on case 50046677230772
 Logistics code(s) 927990483022
 tpd_ilcos_cd FDH-14/30/1B-L/P-G5-16
 eop_net_weight_pp 54.000 gr

Dimensional drawing

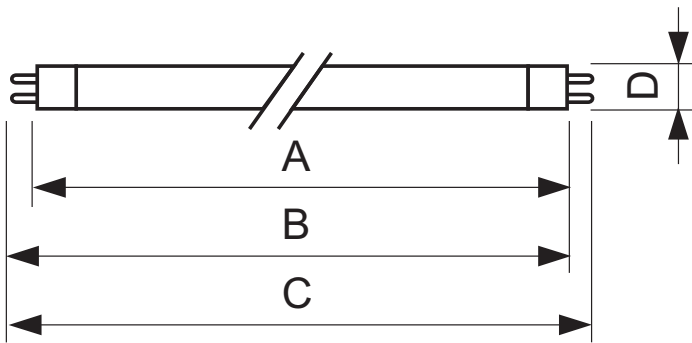



14W/830 Min Bipin T5 HE ALTO UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TLS HE F14T5/830 HE Alto	549.0	553.7	556.1	563.2	17



G5

Photometric data

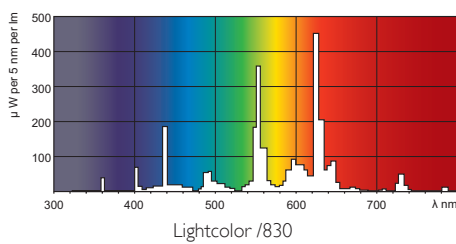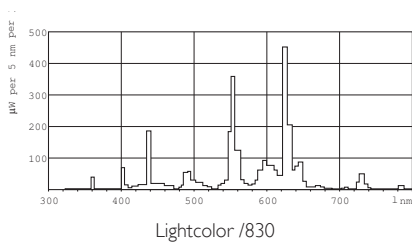



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change