



Preheat T8

F15T8/CW 25PK

Philips leads the industry with the lowest level mercury technology. Reducing the mercury level (source reduction) during the manufacturing phase is essential to creating products that are less harmful to the environment.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	10000 h
Life To 50% Failures (Nom)	13000 h
Features	ALTO® (ALTO)

Light Technical	
Color Code	33-640
Initial lumen (Nom)	830 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	377
Chromaticity Coordinate Y (Nom)	381
Correlated Color Temperature (Nom)	4100 K
Color Rendering Index (Nom)	63

Operating and Electrical	
Power (Rated) (Nom)	15.5 W
Lamp Current (Nom)	0.335 A

Voltage (Nom)	55 V
---------------	------

Controls and Dimming	
Dimmable	Yes


Mechanical and Housing	
Cap-Base Information	Green [Green Cap]

Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg

Product Data	
Order product name	F15T8/CW 25PK
EAN/UPC - Product	046677367206
Order code	407197
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928022803325
Net Weight (Piece)	59.600 g

Preheat T8

Dimensional drawing

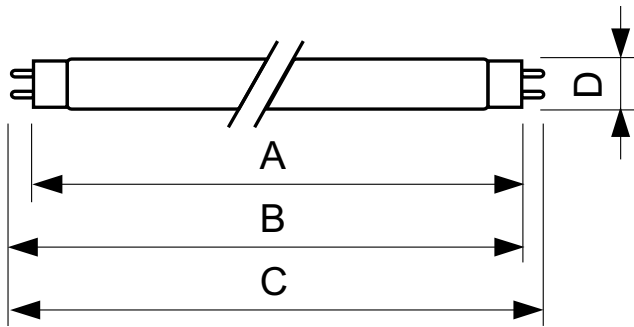

Product	D	A	B	B	C
F15T8/CW 25PK	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-D F15T8 Cool White/GC ALTO

Photometric data

