



Retail Sales T8

F15T8 SOFT WHITE/18 ALTO 6PK

Energy Savings, extra long life, extra low mercury T8 lamps offer high energy savings, superior lumen output, and long life in an environmentally responsible lamp.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	10000 h
Life To 50% Failures (Nom)	13000 h
Features	ALTO® (ALTO)

Light Technical	
Color Code	830 [CCT of 3000K]
Initial lumen (Nom)	990 lm
Color Designation	Soft White
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 5000 h (Nom)	88 %
Chromaticity Coordinate X (Nom)	442
Chromaticity Coordinate Y (Nom)	406
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	83

Operating and Electrical	
Power (Rated) (Nom)	15.5 W
Lamp Current (Nom)	0.335 A
Voltage (Nom)	55 V

Controls and Dimming	
Dimmable	Yes


Mechanical and Housing	
Cap-Base Information	Green [Green Cap]

Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg

Product Data	
Order product name	F15T8 SOFT WHITE/18 ALTO SL6
EAN/UPC - Product	046677392123
Order code	392126
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928022883028
Net Weight (Piece)	59.600 g

Retail Sales T8


Dimensional drawing

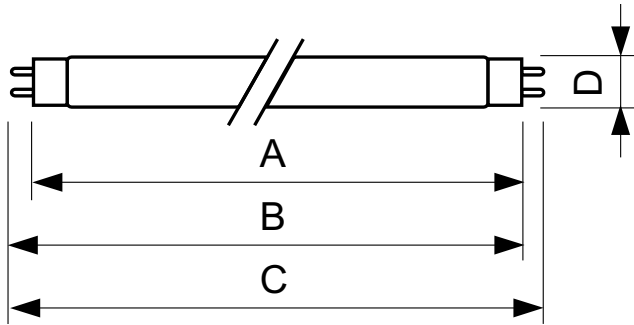


TL-D F15T8 Soft White/GC ALTO

Product	D (max)	A (max)	B (max)	B (min)	C (max)
F15T8 SOFT WHITE/18 ALTO	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
SL6					


Lifetime

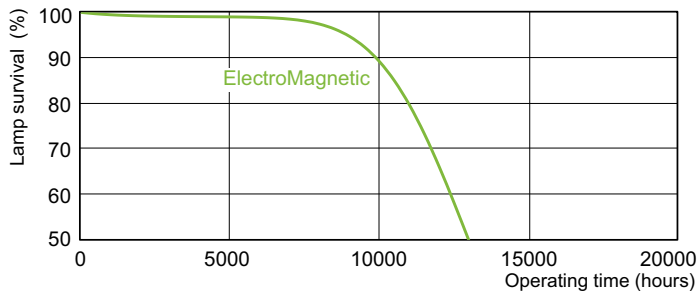

TL-D Standard Colours Life Expectancy 3 h cycle

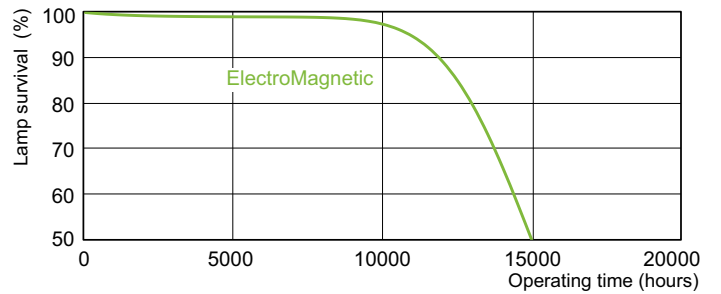

TL-D Standard Colours Life Expectancy 12 h cycle

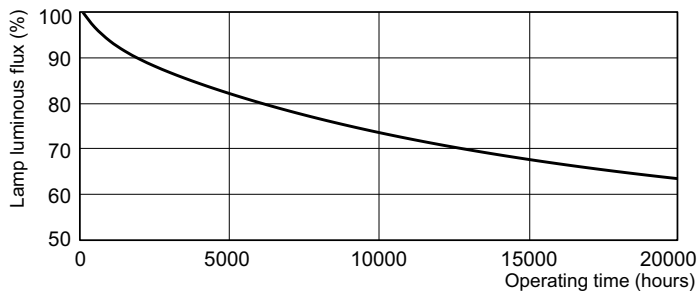

TL-D Standard Colours Lumen Maintenance 3 h + 12 h cycle

