



# T5 High Output

24W/841 Min Bipin T5 HO ALTO UNP

Philips T5 HO lamps are environmentally-responsible, ultra-slim and have extraordinary light output and longer life.

## Product data

### • General Characteristics

|                    |                    |
|--------------------|--------------------|
| System Description | High Output        |
| Base               | Miniature Bipin    |
| Base Information   | Green [Green Base] |
| Bulb               | T5 [16 mm]         |
| Life to 10% fail   | 21000 hr           |
| Preheat EL,3h      |                    |
| Rated Avg. Life    | 30000 hr           |
| LSF HF Preheat     | 99 %               |
| 2000h Rated,3h     |                    |
| LSF HF Preheat     | 99 %               |
| 4000h Rated,3h     |                    |
| LSF HF Preheat     | 99 %               |
| 6000h Rated,3h     |                    |
| LSF HF Preheat     | 99 %               |
| 8000h Rated,3h     |                    |
| LSF HF Preheat     | 99 %               |
| 12000h Rated,3h    |                    |
| LSF HF Preheat     | 97 %               |
| 16000h Rated,3h    |                    |
| LSF HF Preheat     | 84 %               |
| 20000h Rated,3h    |                    |

### • Light Technical Characteristics

|                       |                                  |
|-----------------------|----------------------------------|
| Color Code            | 841 [CCT of 4100K]               |
| Color Rendering Index | 80 (min), 82 (nom), 85 (max) Ra8 |
| Color Designation     | Cool White                       |
| Color Temperature     | 4100 K                           |
| Luminous Flux EL      | 1700 Lm                          |
| 25°C, Rated           |                                  |
| Luminous Flux EL      | 1700 Lm                          |
| 25°C, Nominal         |                                  |
| Initial Lumens        | 1950 Lm                          |
| Lum Efficacy Rated    | 76 Lm/W                          |
| HF 25°C               |                                  |

|                           |         |
|---------------------------|---------|
| Lum Efficacy Rated        | 87 Lm/W |
| HF 35°C                   |         |
| LLMF HF 2000h             | 96 %    |
| Rated                     |         |
| LLMF HF 4000h             | 95 %    |
| Rated                     |         |
| LLMF HF 6000h             | 94 %    |
| Rated                     |         |
| LLMF HF 8000h             | 93 %    |
| Rated                     |         |
| LLMF HF 12000h            | 92 %    |
| Rated                     |         |
| LLMF HF 16000h            | 91 %    |
| Rated                     |         |
| LLMF HF 20000h            | 90 %    |
| Rated                     |         |
| Design Temperature        | 35 C    |
| Chromaticity Coordinate X | 380 -   |
| Chromaticity Coordinate Y | 380 -   |

### • Electrical Characteristics

|                 |         |
|-----------------|---------|
| Watts           | 24 W    |
| Lamp Wattage EL | 22.5 W  |
| 25°C, Rated     |         |
| Lamp Wattage EL | 22.5 W  |
| 25°C, Nominal   |         |
| Lamp Wattage EL | 22.5 W  |
| 35°C            |         |
| Lamp Voltage EL | 77 V    |
| 25°C            |         |
| Lamp Voltage EL | 75 V    |
| 35°C            |         |
| Lamp Current EL | 0.295 A |
| 25°C            |         |

**PHILIPS**

# T5 High Output

Lamp Current EL 0.300 A  
 35°C  
 Dimmable Yes

Insertion Length B 553.7 (min), 556.1 (max) mm  
 Overall Length C 563.2 (max) mm  
 Diameter D 17 (max) mm

• Environmental Characteristics

Energy Efficiency Label (EEL) A  
 Mercury (Hg) Content 1.4 mg

• Measuring Conditions

Calibration Current 0.300 A  
 HF Generator Rated Voltage 150 V  
 Resistor 250 ohm



• Product Dimensions

Base Face to Base Face A 549.0 (max) mm

• Product Data

Product number 290213  
 Full product name 24W/841 Min Bipin T5 HO ALTO UNP  
 Short product name 24W/841 Min Bipin T5 HO ALTO UNP  
 Pieces per Sku 1  
 eop\_pck\_cfg 40  
 Skus/Case 40  
 Bar code on pack 46677290214  
 Bar code on case 50046677290219  
 Logistics code(s) 927992184022  
 tpd\_ilcos\_cd FDH-24/40/1B-L/P-G5-16/1150  
 eop\_net\_weight\_pp 54.000 gr

## Dimensional drawing


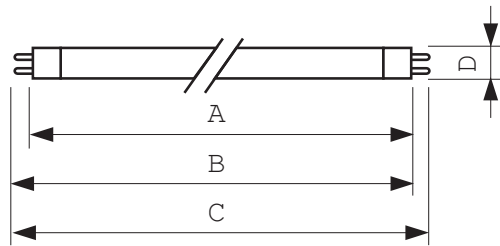


G5

## 24W/841 Min Bipin T5 HO ALTO UNP

| Product                  | A (Max) | B (Min) | B (Max) | C (Max) | D (Max) |
|--------------------------|---------|---------|---------|---------|---------|
| TLS HO F24T5/841 HO Alto | 549.0   | 553.7   | 556.1   | 563.2   | 17      |

## Photometric data

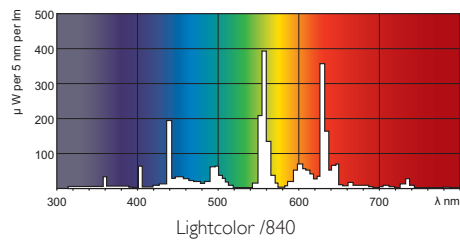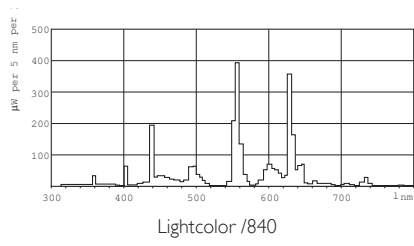

© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, October 31  
data subject to change