



T5 Standard

28W/830 Min Bipin T5 HE ALTO UNP

Philips T5 Fluorescent Lamps featuring ALTO® Lamp Technology offer increased energy savings and low toxicity in a slim profile.

Product data

• General Characteristics

System Description	High Efficiency
Base	Miniature Bipin
Base Information	Green [Green Base]
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Rated Avg. Life	24000 hr
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation	Warm White
Color Temperature	3000 K
Luminous Flux EL	2625 Lm
25°C, Rated	
Luminous Flux EL	2625 Lm
25°C, Nominal	
Initial Lumens	2900 Lm
Lum Efficacy Rated	94 Lm/W
HF 25°C	

Lum Efficacy Rated	104 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Electrical Characteristics

Watts	28 W
Lamp Wattage EL	27.9 W
25°C, Rated	
Lamp Wattage EL	28 W
25°C, Nominal	
Lamp Wattage EL	27.8 W
35°C	
Lamp Voltage EL	166 V
25°C	
Lamp Voltage EL	167 V
35°C	
Lamp Current EL	0.170 A
25°C	

T5 Standard

Lamp Current EL 0.170 A
 35°C
 Dimmable Yes

Insertion Length B 1153.7 (min), 1156.1 (max) mm
 Overall Length C 1163.2 (max) mm
 Diameter D 17 (max) mm

• Environmental Characteristics

Energy Efficiency Label (EEL) A
 Mercury (Hg) Content 1.4 mg

• Measuring Conditions

Calibration Current 0.170 A
 HF Generator Rated Voltage 329 V
 Resistor 950 ohm


• Product Dimensions

Base Face to Base Face A 1149.0 (max) mm

• Product Data


Product number 230847
 Full product name 28W/830 Min Bipin T5 HE ALTO UNP
 Short product name 28W/830 Min Bipin T5 HE ALTO UNP/40
 Pieces per Sku 1
 eop_pck_cfg 40
 Skus/Case 40
 Bar code on pack 46677230845
 Bar code on case 50046677230840
 Logistics code(s) 927990683022
 tpd_ilcos_cd FDH-28/30/1B-L/P-G5-16/1150
 eop_net_weight_pp 104.500 gr

Dimensional drawing

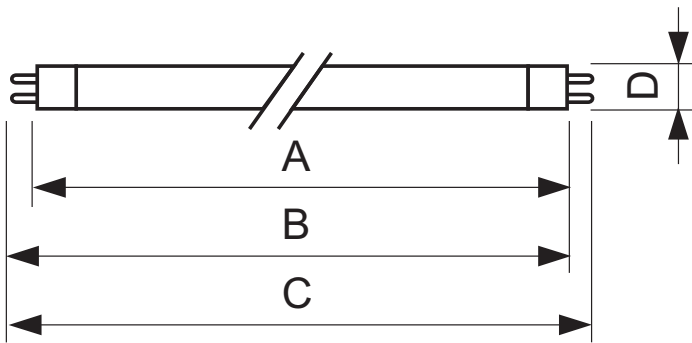



28W/830 Min Bipin T5 HE ALTO UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TLS HE F28T5/830 HE Alto UNP/40	1149.0	1153.7	1156.1	1163.2	17



G5

Photometric data

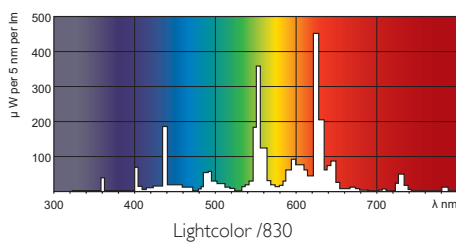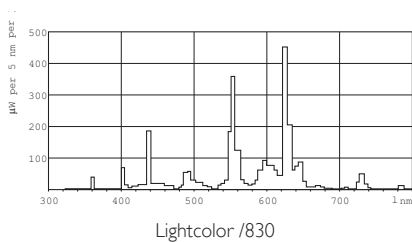



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of
Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change