

4

3

↓

DWG NO. 1000489 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

D

D


C

C



B

B

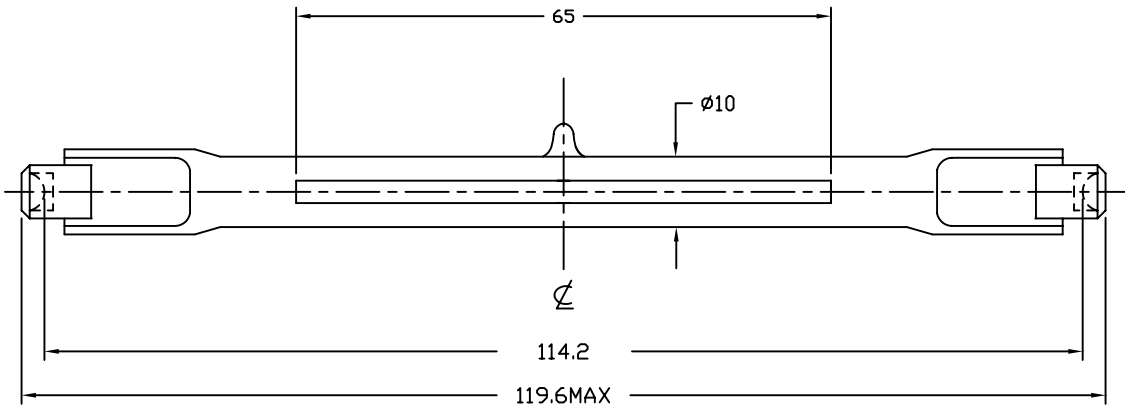

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1000 W
LUMENS	27000 Lm
COLOR TEMP.	3200 K
BASE TYPE	R7S-12
AVERAGE LIFE	300 HRS
FILAMENT TYPE	C-8
BURN POSITION	Horizontal $\pm 4^\circ$

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
	APPROVALS					DATE
	DRAWN	R.AMPARO	09/27/99	TITLE FCM J120V-1000WC1		
	CHKD	D.GILCZYNSKI	09/27/99			
	ENGR					
	MFG					
	MATERIAL	QUAL		SIZE	CODE IDENT NO.	DWG NO.
	COMPOSITE			B	FCM	1000489
	FINISH	DSGN ACTVY		SCALE NONE		
		GOV'T ACTVY				

A

A

4

3

↑

2

1

CAD