


4

3

DWG NO. 1000502 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

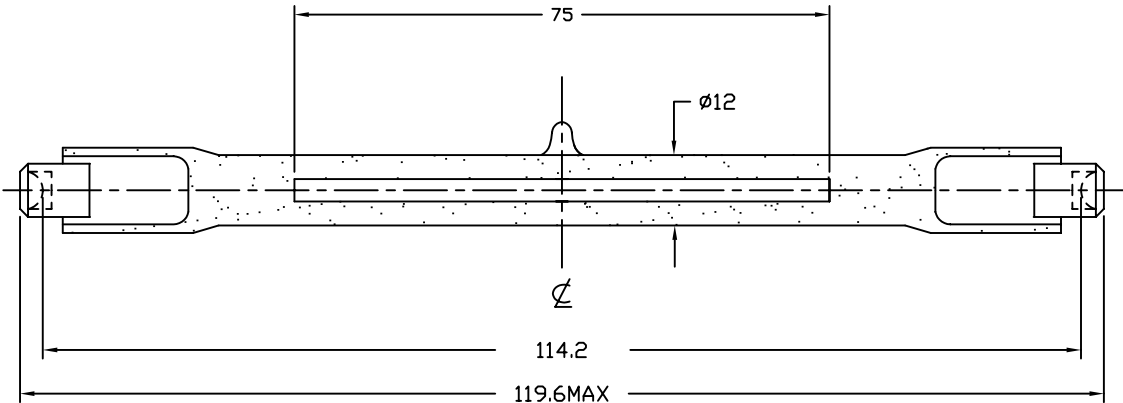

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	500 W
LUMENS	12500 Lm
COLOR TEMP.	3200 K
BASE TYPE	R7S-12
AVERAGE LIFE	400 HRS
FILAMENT TYPE	C-8
BURN POSITION	Horizontal±4°

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS				
LIST OF MATERIALS									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630					
		APPROVALS				DATE			
		DRAWN	R.AMPARO	09/27/99	TITLE FDN JP120V-500WCF6				
		CHKD	D.GILCZYNSKI	09/27/99					
		ENGR							
		MATERIAL COMPOSITE		MFG		SIZE B		CODE IDENT NO. FDN	DWG NO. 1000502
				QUAL					
FINISH		DSGN ACTVY		SCALE NONE					
		GOVT ACTVY							

4

3

2

1

CAD