


REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

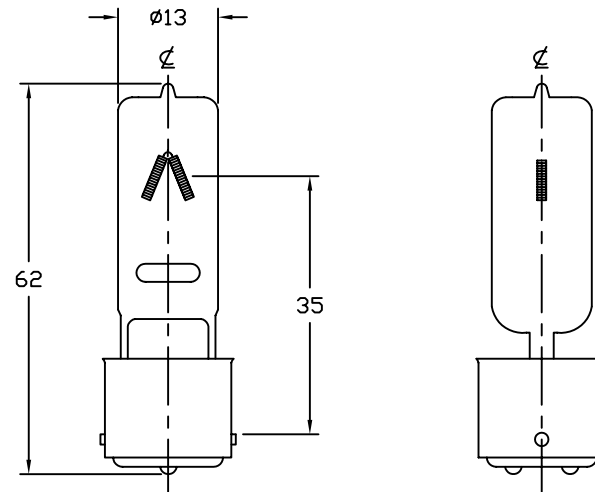

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
		APPROVALS		DATE		
		DRAWN	R.AMPARO	09/02/99	TITLE FEV JCV120V-200WCB2	
		CHKD	D.GILCZYNSKI	09/02/99		
		ENGR				
		MFG				
		MATERIAL		QUAL	SIZE	CODE IDENT NO.
COMPOSITE			B	FEV	1000512	
FINISH		DSGN ACTVY				
		GOVT ACTVY	SCALE	WEIGHT	SHEET	
			NONE		1 OF 1	

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	150 W
COLOR TEMP.	3200 K
TOTAL LUMEN	5500 Lm
BASE TYPE	BA15D
AVERAGE LIFE	50 HRS
FILAMENT TYPE	CC-2V
BURN POSITION	Any

NEXT ASSY	USED ON
APPLICATION	